

# Contact insert module - HC-M-EMV-MOD-ST - 1678567


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON series M EMC contact insert module, for using two HC-M-EMV-ST/3-9.5 EMC connectors (pin version, each 4-pos.)



## Key commercial data

Packing unit	2 pc
Minimum order quantity	2 pc
GTIN	 4 017918 167639
Weight per Piece (excluding packing)	14.5 g
Custom tariff number	85369010
Country of origin	Germany

## Technical data

### Electrical characteristics

Note	For HEAVYCON housing type B6 to B48, HC-M-MHR... hinged retaining frame required
------	--

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

### Mechanical characteristics

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

### General

Series	HC-M-EMV
Number of module slots	2
Inflammability class according to UL 94	V0
Assembly instructions	Housing height ≥ 72 mm. Plug-in connections may only be operated only when there is no load/voltage.
Connection	Plastic module for the HC-M-EMV-ST/3-9.5 EMC connector

### Material data

# Contact insert module - HC-M-EMV-MOD-ST - 1678567

## Technical data

### Material data

Contact carrier material	PC
--------------------------	----

## Classifications

### eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440207

### ETIM

ETIM 2.0	EC000438
ETIM 3.0	EC000438
ETIM 4.0	EC000438
ETIM 5.0	EC000438

### UNSPSC

UNSPSC 6.01	30211923
UNSPSC 7.0901	39121522
UNSPSC 11	39121522
UNSPSC 12.01	39121522
UNSPSC 13.2	39121522

## Approvals

### Approvals

---

#### Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

---

#### Ex Approvals

---

#### Approvals submitted

---

#### Approval details

# Contact insert module - HC-M-EMV-MOD-ST - 1678567

## Approvals

UL Recognized	
mm <sup>2</sup> /AWG/kcmil	16
Nominal current I <sub>N</sub>	10 A
Nominal voltage U <sub>N</sub>	42 V


cUL Recognized	
mm <sup>2</sup> /AWG/kcmil	16
Nominal current I <sub>N</sub>	9 A
Nominal voltage U <sub>N</sub>	42 V

EAC

cULus Recognized

## Drawings

Dimensioned drawing

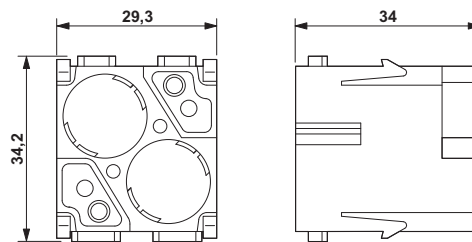

Male insert