

Adapter plate - VC-B 16-ADP/2 DSUB 25-U - 1607862

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Mounting adapter plates 1.5 mm thick, with UNC countersunk screws, number of inserts: 2x DSUB 25

The illustration shows the product version VC-B 10-ADP/2 DSUB 15-M

Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 969271
Weight per Piece (excluding packing)	48.8 g
Custom tariff number	85389099
Country of origin	Germany

Technical data

General

Size	VC3
------	-----

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
Degree of protection	IP65, when in locked state

Material data

Seal material	NBR
---------------	-----

Classifications

eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27189239

Adapter plate - VC-B 16-ADP/2 DSUB 25-U - 1607862

Classifications

eCl@ss

eCl@ss 5.1	27189239
eCl@ss 6.0	27144001
eCl@ss 7.0	27144001

ETIM

ETIM 2.0	EC000007
ETIM 3.0	EC000007
ETIM 4.0	EC000007
ETIM 5.0	EC000007


UNSPSC

UNSPSC 6.01	43172601
UNSPSC 7.0901	31261501
UNSPSC 11	43172601
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

Drawings

Adapter plate - VC-B 16-ADP/2 DSUB 25-U - 1607862

Drilling diagram

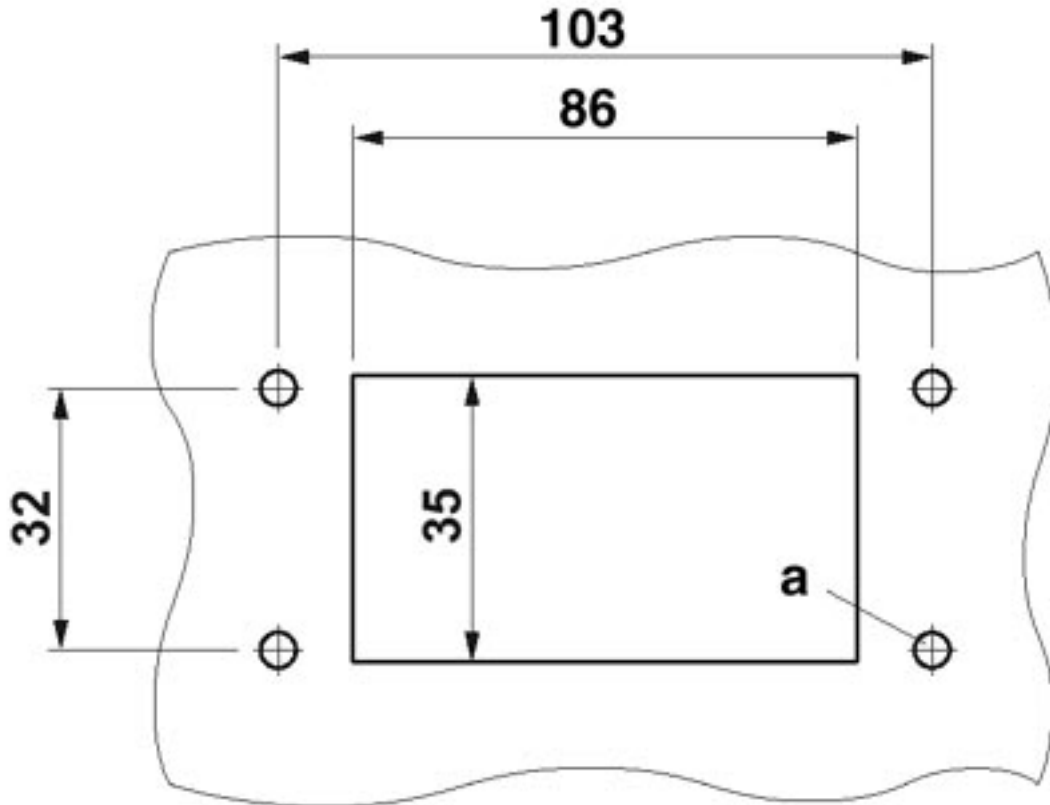

Panel cutout

a = When M4 screws are used: M4 or diameter 4.5 mm

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1607862](#)