

## Housing - HC-B 24-TMB-100/O1STM40S-EEE - 1460376


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON ADVANCE B24 sleeve housing, with bayonet locking (Allen screw), salt water resistant aluminum, height: 100 mm, with 1 x M40 thread, lateral cable outlet, without surface; conductive seal (EMC properties)



### Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 592758
GTIN	4046356592758
Weight per Piece (excluding packing)	470.000 g
Custom tariff number	85389099
Country of origin	Germany

### Technical data

#### Dimensions

Height	100 mm
--------	--------

#### Ambient conditions

Degree of protection of housing (IP)	IP66
	IP67
Ambient temperature (operation)	-40 °C ... 125 °C

#### General

Note	for contact inserts HC-B24, BB46, D64, DD108, HV10/16, M
Size	B24
Housing type	Sleeve housing

# Housing - HC-B 24-TMB-100/O1STM40S-EEE - 1460376


## Technical data

### General

Locking type	Bayonet locking
Fixing screws	M6
No. of cable outlets	1
Cable exit	lateral
Screw connection	none
Type of the screw connection	1x M40
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	Uncoated
Seal material	NBR, conductive
Material lock	Stainless steel
Connection	If insulating powder coating is present on the control cabinet panel, it should be removed from the profile gasket area in order to ensure optimum shielding.

## Drawings


Dimensional drawing



Panel cutout

²) When self-tapping screws are used (Torx® 20, M4)

Dimensional drawing

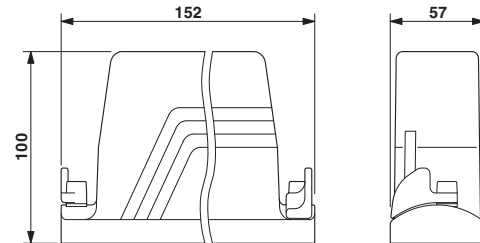

Dimensional drawing

## Approvals

### Approvals

Approvals


EAC

Ex Approvals

## Housing - HC-B 24-TMB-100/O1STM40S-EEE - 1460376

### Approvals

#### Approval details

EAC		7500651.22.01.00246
-----	---	---------------------