

CK4,0-ED-1,50ST AG

Order No.: 1663239

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1663239>Turned 4.0 crimp contact, individual male contact, core diameter 1.5 mm², silver-plated**Commercial data**

GTIN (EAN)	4017918123048
sales group	D090
Pack	25 pcs.
Customs tariff	85366990
Weight/Piece	0.00309 KG
Catalog page information	Page 529 (PC-2009)

Product notesWEEE/RoHS-compliant since:
12/01/2005

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Electrical characteristics**

Note	For HC-M-3 modules
Volume resistance	≤ 0.003 Ω
Ambient temperature (operation)	-40 °C ... 125 °C

Mechanical characteristics

Conductor cross section	1.5 mm ²
Connection cross section AWG	16
Stripping length of the individual wire	9 mm (9.6 mm (4-6 mm ²))
Insertion/withdrawal cycles	≥ 500

General characteristics

Type	Individual male contact
Series	HC-M-03

Material data

Contact material	Copper alloy
Contact surface material	hard-silver plated

Certificates / Approvals



Certification GOST, UL

Accessories


Item	Designation	Description
------	-------------	-------------

Tools


1662735	CK4,0-EWZ	Contact removal tool, for rotated CK-4,0-... contacts
1205846	CRIMPFOX-4,0-ED-2,50	Crimping pliers, for CK 4.0... contacts, for conductor cross sections 1.5 - 2.5 mm ²
1205859	CRIMPFOX-4,0-ED-6,00	Crimping pliers, for CK 4.0... contacts, for conductor cross sections 3.0 - 6.0 mm ²

Diagrams/Drawings

Diagram

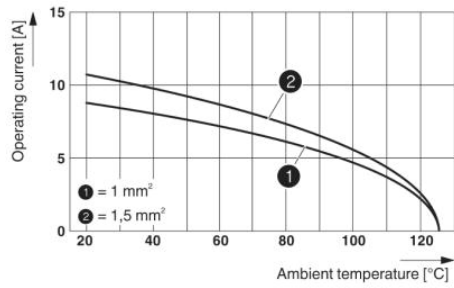

Dimensioned drawing

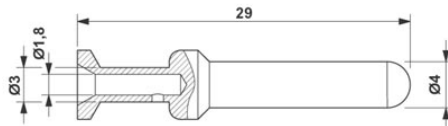

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;