


HC-B 16-TFL-76/O1STM40S

Order No.: 1644672

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1644672>

HEAVYCON sleeve housing B16, for single locking latch, height 76 mm, without support 1x M40, lateral conductor exit

| Commercial data | |
|--------------------------|---|
| GTIN (EAN) |  4 017918 907839 |
| sales group | D002 |
| Pack | 10 pcs. |
| Customs tariff | 85389099 |
| Catalog page information | Page 571 (PC-2011) |

Product notes

WEEE/RoHS-compliant since:
01/31/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data


General data

| | |
|--------|--|
| Note | For contact inserts HC-B16, BB32, D40, DD72, HS6, M, K |
| Design | B16 |
| Height | 76 mm |
| Width | 43 mm |

| | |
|---------------------------------|--------------------------|
| Length | 94 mm |
| Housing type | Sleeve housings |
| Locking type | for single locking latch |
| No. of cable exits | 1 |
| Cable exit | Lateral |
| Pg screw connection | None |
| Type of the screw connection | 1x M40 |
| Degree of protection | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Housing material | Aluminum, die-cast |
| Housing surface material | Powder-coated, gray |

Diagrams/Drawings

Dimensioned drawing

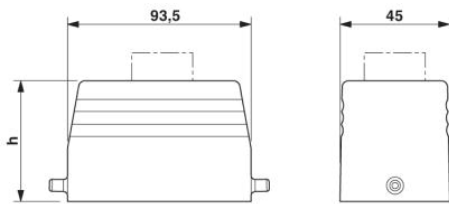

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;