

HC-B 16-TFQ-76/O1PG29G


Order No.: 1673957

The illustration shows a sleeve housing in the versions for double locking latch and single locking latch and with double locking latch



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1673957>

Sleeve housing, for double locking latch, height: 76 mm, with supports, 1 x Pg29, straight cable outlet

Commercial data	
GTIN (EAN)	 4 017918 152017
Note	Made-to-order
sales group	D002
Pack	10 pcs.
Customs tariff	85389099

Product notes

WEEE/RoHS-compliant since:
01/31/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data	
Note	For contact inserts HC-B16, BB32, D40, DD72, HS6, M, K
Design	B16
Height	76 mm
Width	43 mm
Length	94 mm
Housing type	Sleeve housings
Locking type	For double locking latch

Cable exit	Straight
Pg screw connection	None
Type of the screw connection	1x Pg29
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

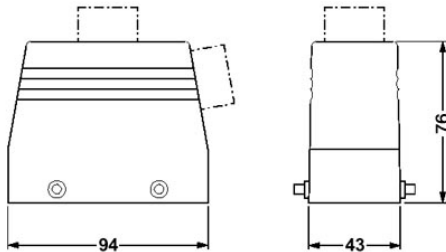

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;