


**VC-MP-T3-R**

Order No.: 1855555

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1855555>

Metal sleeve housing, powder-coating, locking screws with knurled head, type 3, cable screw connection Pg21

**Commercial data**

GTIN (EAN)	 4 017918 161538
sales group	D201
Pack	5 pcs.
Customs tariff	85389099
Catalog page information	Page 369 (PC-2009)

**Product notes**

WEEE/RoHS-compliant since:  
12/01/2005



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****General data**


Note	When using fiber optics, the bending radii of the cable manufacturers must be observed.
Design	VC4
Color	gray aluminum
Locking type	Screw locking, cylinder head
Tightening torque, mounting screw	1.5 Nm ± 0.3 Nm
Fixing screws	M4
No. of cable exits	1
Cable exit	Angled
Pg screw connection	None
Type of the screw connection	M32 x 1.5
Degree of protection	IP65/IP68/IP69K
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Seal material	NBR, conductive
Material of locking screw	V2A
Inflammability class acc. to UL 94	V0

**Accessories**

Item	Designation	Description
<b>General</b>		
0806628	GPE 22X22 SR/R	Plastic label sheet, self-adhesive double-layer plastic labels, with rounded edges, radius 2 mm, material thickness: 0.8 mm, suitable for plotting and engraving, color: silver

## Diagrams/Drawings

### Dimensioned drawing

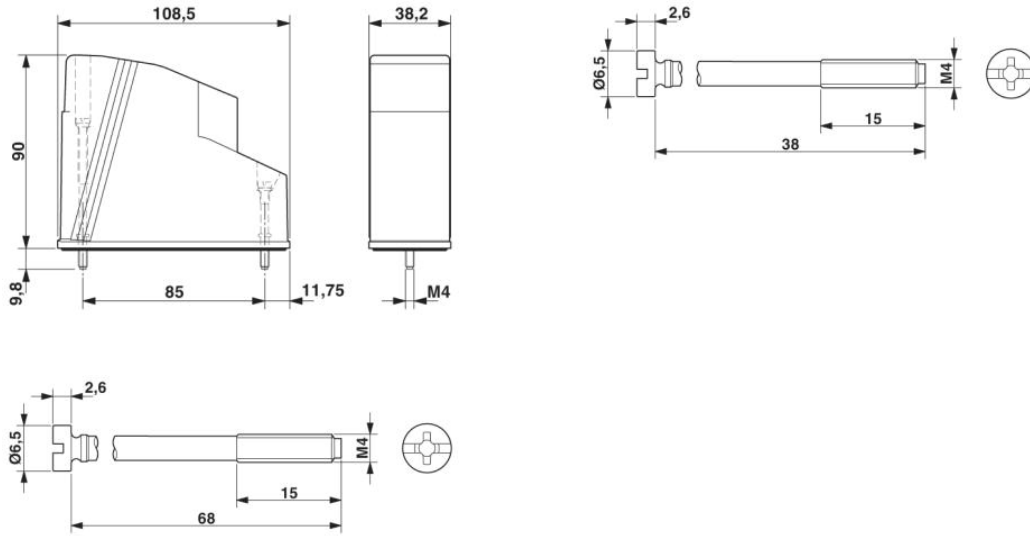

VC-MP-T3-R Order No.: 1855555

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1855555>

---

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;