


HC-B 6-TFL-43/M2PG13,5S

Order No.: 1679058

The figure shows the version with a lateral cable outlet

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1679058>Sleeve housing, for single locking latch, height 43 mm, with screw
connection, 2x Pg13.5, lateral cable entry

Commercial data	
GTIN (EAN)	 4 017918 168551
sales group	D002
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 394 (PC-2007)

Product notesWEEE/RoHS-compliant since:
01/31/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data	
Note	For contact inserts HC-B6, BB10, DD24, M
Design	B6
Height	44 mm
Width	43 mm
Length	60 mm

Housing type	Sleeve housings
Locking type	for single locking latch
Cable exit	Lateral (left/right)
Pg screw connection	With
Type of the screw connection	2x Pg13.5
Wrench size, union nut	20 mm
External cable diameter	7.5 mm ... 12.5 mm
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Cable gland material	Nickel-plated brass
Cable seal material	NBR

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

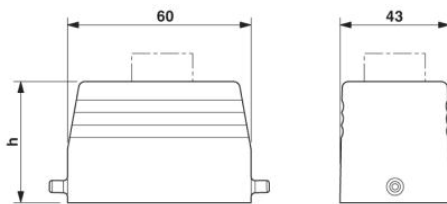

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;