


HC-M-04-MOD-BU

Order No.: 1676789



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1676789>

HEAVYCON contact insert module, female, 4-pos., coaxial crimp connection

Commercial data

EAN	4017918129385
Pack	2 pcs.
Customs tariff	85369010
Weight/Piece	0.0239 KG
Catalog page information	Page 461 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
01/26/2007



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Electrical characteristics

Note	For housing HC-B6 to B48, for housing HC-ADVANCE-B6 to B24, hinged retaining frame HC-M-MHR... necessary, crimp contacts HC-M-04-KOAX...(not included in scope of supply)
Rated voltage (III/3)	50 V
Rated current	1.5 A
Rated surge voltage	3 kV
Volume resistance, phase conductor	$\leq 3 \text{ m}\Omega$

Volume resistance, inner conductor	$\leq 10 \text{ m}\Omega$
Insulation resistance	$\geq 10 \text{ G}\Omega$
Ambient temperature (operation)	-40 °C ... 125 °C
Number of positions	4

Mechanical characteristics

Insertion/withdrawal cycles	≥ 500
-----------------------------	------------

General characteristics


Number of module slots	1
Connection method	Crimp connection
Inflammability class acc. to UL 94	V0
Pollution degree	3
Surge voltage category	III
Assembly instructions	For housing heights $\geq 52 \text{ mm}$. Plug-in connections may only be operated only when there is no load/voltage.

Material data

Contact carrier material	PC
--------------------------	----

Drawings

Dimensioned drawing

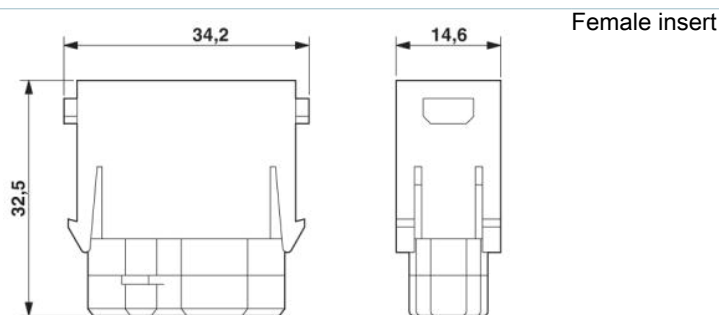

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;