

## Housing - HC-B 10-TFL-N-O1M25S - 1460334


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sleeve housing, for single locking latch, height: 56 mm, with gland, 1 x M25, lateral cable outlet



### Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 794817
GTIN	4046356794817
Weight per Piece (excluding packing)	166.000 g
Custom tariff number	85389099
Country of origin	Germany

### Technical data

#### Dimensions

Height	56 mm
Width	43 mm
Length	73 mm

#### Ambient conditions

Degree of protection of housing (IP)	IP65
Ambient temperature (operation)	-40 °C ... 125 °C

#### General

Note	For contact inserts HC-B10, BB18, DD42, M, K8/24
Size	B10
Housing type	Sleeve housing

# Housing - HC-B 10-TFL-N-O1M25S - 1460334


## Technical data

### General

Locking type	for single locking latch
No. of cable outlets	1
Cable exit	lateral
Screw connection	none
Type of the screw connection	1x M25
Housing material	Aluminum die-cast
Housing surface material	Powder-coated, gray
Assembly instructions	For half and full screw connections

## Drawings

Dimensional drawing

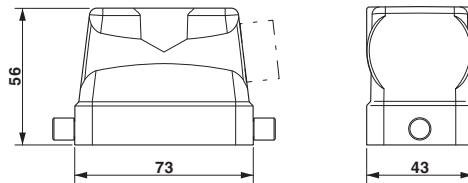

Dimensional drawing

## Approvals

Approvals

---

Approvals

EAC

---

Ex Approvals

---

Approval details

EAC		7500651.22.01.00246
-----	--	---------------------

