

## Housing - HC-B 10-TFQ-45/O1PG16G - 1673559

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sleeve housing, for double locking latch, height: 45 mm, with supports, 1 x Pg16, straight cable outlet



### Key Commercial Data

Packing unit	1 STK
Weight per Piece (excluding packing)	135.820 g
Custom tariff number	85389099
Country of origin	Germany

### Technical data

#### Dimensions

Height	45 mm
Width	43 mm
Length	73 mm

#### Ambient conditions

Degree of protection of housing (IP)	IP65
Ambient temperature (operation)	-40 °C ... 125 °C

#### General

Note	For contact inserts HC-B10, BB18, DD42, M, K8/24
Size	B10
Housing type	Sleeve housing
Locking type	for double locking latch
No. of cable outlets	1
Cable exit	straight

# Housing - HC-B 10-TFQ-45/O1PG16G - 1673559


## Technical data

### General

Screw connection	none
Type of the screw connection	1x Pg16
Housing material	Aluminum die-cast
Housing surface material	Powder-coated, gray

## Drawings

Dimensional drawing

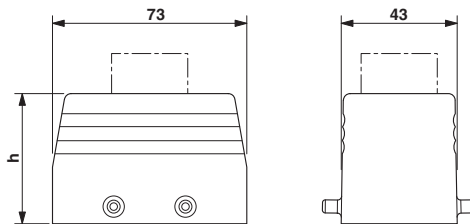

## Classifications

### eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440202
eCl@ss 9.0	27440202

### ETIM

ETIM 2.0	EC000437
ETIM 3.0	EC000437
ETIM 4.0	EC000437
ETIM 5.0	EC000437

### UNSPSC

UNSPSC 6.01	31261502
UNSPSC 7.0901	31261502
UNSPSC 11	31261502
UNSPSC 12.01	31261502

## Housing - HC-B 10-TFQ-45/O1PG16G - 1673559

### Classifications

#### UNSPSC

UNSPSC 13.2	31261502
-------------	----------

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1673559](#)