

Housing - HC-B 10-TFQ-N-O1M20S - 1460253

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON B10 sleeve housing, for double locking latch, height: 56 mm, with 1 x M20 gland, lateral cable outlet



Key Commercial Data

| | |
|----------------------|----------|
| Packing unit | 1 STK |
| Custom tariff number | 85389099 |
| Country of origin | Germany |

Technical data

Environmental Product Compliance

| | |
|------------|--|
| China RoHS | No hazardous substances above threshold values |
|------------|--|

Dimensions

| | |
|--------|-------|
| Height | 56 mm |
| Width | 43 mm |
| Length | 73 mm |

Ambient conditions

| | |
|--------------------------------------|-------------------|
| Degree of protection of housing (IP) | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |

General

| | |
|--------------|--|
| Note | For contact inserts HC-B10, BB18, DD42, M, K8/24 |
| Size | B10 |
| Housing type | Sleeve housing |
| Locking type | for double locking latch |

Housing - HC-B 10-TFQ-N-O1M20S - 1460253


Technical data

General

| | |
|------------------------------|-------------------------------------|
| No. of cable outlets | 1 |
| Cable exit | lateral |
| Screw connection | none |
| Type of the screw connection | 1x M20 |
| Housing material | Aluminum die-cast |
| Housing surface material | Powder-coated, gray |
| Assembly instructions | For half and full screw connections |

Drawings

Dimensional drawing

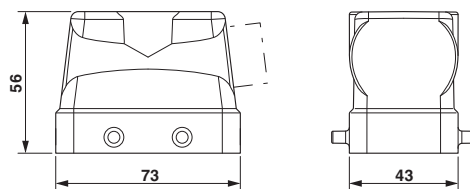

Dimensional drawing

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27140816 |
| eCl@ss 4.1 | 27140816 |
| eCl@ss 5.0 | 27143424 |
| eCl@ss 5.1 | 27143424 |
| eCl@ss 6.0 | 27143424 |
| eCl@ss 7.0 | 27440209 |
| eCl@ss 8.0 | 27440202 |
| eCl@ss 9.0 | 27440202 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC000437 |
| ETIM 4.0 | EC000437 |
| ETIM 5.0 | EC000437 |

UNSPSC

| | |
|-------------|----------|
| UNSPSC 6.01 | 31261502 |
|-------------|----------|

Housing - HC-B 10-TFQ-N-O1M20S - 1460253

Classifications

UNSPSC

| | |
|---------------|----------|
| UNSPSC 7.0901 | 31261502 |
| UNSPSC 11 | 31261502 |
| UNSPSC 12.01 | 31261502 |
| UNSPSC 13.2 | 31261502 |

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

| |
|-------------------------|
| EAC 7500651.22.01.00246 |
|-------------------------|

Accessories

Accessories

Extension adapter

Extension adapter - ENLAR-M-KV-M20/M25 - 1647666



Step-up adapter, M20 to M25, including O-ring

Full screw connection

Cable gland - G-INS-M20-S68N-PNES-GY - 1411125



Cable gland, Cable gland material: Polyamide 6, External cable diameter 6 mm ... 12 mm, Shielding: No, Connecting thread: M20, Color: silver-gray RAL 7001

Housing - HC-B 10-TFQ-N-O1M20S - 1460253

Accessories

Cable gland - G-INS-M20-S68N-PNES-BK - 1411133



Cable gland, Cable gland material: Polyamide 6, External cable diameter 6 mm ... 12 mm, Shielding: No, Connecting thread: M20, Color: jet black RAL 9005

Cable gland - G-INS-M20-S68N-NNES-S - 1411163



Cable gland, Cable gland material: Brass, nickel-plated, External cable diameter 6 mm ... 12 mm, Shielding: No, Connecting thread: M20, Color: silver

Cable gland - HC-M-KV-M20(11-16) - 1645998



Metal screw connection up to 5 bar, thread length: 6 mm, cable diameter: 11 - 16 mm, WAF 27, screw connection: M20

Cable gland - G-INSEC-M20-S68N-NCRS-S - 1411189



Cable gland, Cable gland material: Brass, nickel-plated, External cable diameter 9 mm ... 13 mm, Shielding: yes, Connecting thread: M20, Color: silver

Cable gland - HC-M-KV-Z-M20 - 1646146



Metal screw connection with strain relief clamp, thread length: 6 mm, cable sealing area: 7.5 - 15 mm, clamping area: 11 - 17 mm, SW 24, screw connection: M20

Housing - HC-B 10-TFQ-N-O1M20S - 1460253

Accessories

Cable gland - HC-M-KV-T-M20 - 1646188



Metal screw connection with cable bend protection and strain relief, thread length: 6 mm, cable sealing area: 7.5 - 15 mm, clamping area: 10 - 16 mm, SW 24, screw connection: M20

Plug for cable screw gland

Filler plugs - HC-M-BS-M20 - 1645846



Filler plug, metal, size: M20

Reducing adapter

Reducing adapter - REDUC-M-KV-M20/M16 - 1647611



Step-down adapter, M20 to M16, including O-ring

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1460253](#)