

Housing - HC-B 16-TFL-H-O1STM25G - 1460122


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON B16 sleeve housing, for single locking latch, height: 76 mm, with 1 x M25 thread, straight cable outlet



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 793803
GTIN	4046356793803
Weight per Piece (excluding packing)	222.000 g
Custom tariff number	85389099
Country of origin	Germany

Technical data

Dimensions

Height	76 mm
Width	43 mm
Length	94 mm

Ambient conditions

Degree of protection of housing (IP)	IP65
Ambient temperature (operation)	-40 °C ... 125 °C

General

Note	For contact inserts HC-B16, BB32, BBB40, D40, DD72, HS6, M, K
Size	B16
Housing type	Sleeve housing

Housing - HC-B 16-TFL-H-O1STM25G - 1460122


Technical data

General

Locking type	for single locking latch
No. of cable outlets	1
Cable exit	straight
Screw connection	with
Type of the screw connection	1x M25
Housing material	Aluminum die-cast
Housing surface material	Powder-coated, gray

Drawings

Dimensional drawing

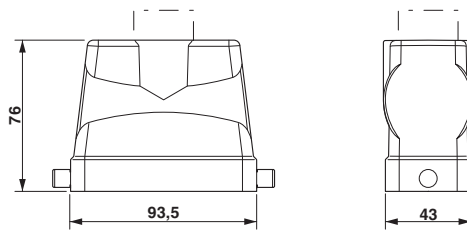

Dimensional drawing

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		7500651.22.01.00246
-----	--	---------------------

