

HC-B 10-KMQ-73/O1M20


Order No.: 1604745



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1604745>

HEAVYCON coupling housing B10, with double locking latch, height 52 mm, with support 1x M20

Commercial data

| | |
|--------------------------|---|
| GTIN (EAN) |  4 017918 881825 |
| Note | Made-to-order |
| sales group | D002 |
| Pack | 10 pcs. |
| Customs tariff | 85389099 |
| Catalog page information | Page 580 (PC-2011) |

Product notes

WEEE/RoHS-compliant since:
01/18/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

| | |
|--------|--|
| Note | For contact inserts HC-B10, BB18, DD42, M, K8/24 |
| Design | B10 |
| Height | 73 mm |
| Width | 43 mm |
| Length | 73 mm |

| | |
|---------------------------------|---------------------------------|
| Housing type | Coupling housings |
| Locking type | With double locking latch |
| No. of cable exits | 1 |
| Cable exit | Straight |
| Pg screw connection | None |
| Type of the screw connection | 1x M20 |
| Degree of protection | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Housing material | Aluminum, die-cast |
| Housing surface material | Powder-coated, gray |
| Seal material | NBR |
| Material lock | High-grade steel, handle: PA-GF |
| Material grip body interlock | PA-GF |

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

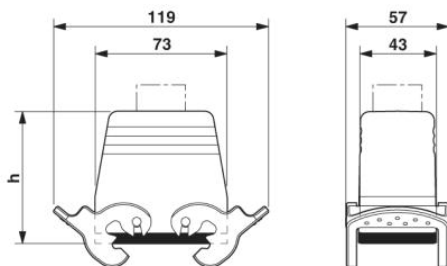

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;