

VC-AL-T3-Z-M32-S

Order No.: 1583694

The figure shows the product version with knurled screw

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1583694>

Aluminum die-cast sleeve housing, with grommet, locking screws with cylinder head, for a metric M32 cable gland, angled cable outlet, type VC3

Commercial data

GTIN (EAN)	 4 046356 183321
sales group	D201
Pack	5 pcs.
Customs tariff	85389099
Catalog page information	Page 365 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
10/15/2007



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Note	When using fiber optics, the bending radii of the cable manufacturers must be observed.
Design	VC3
Height	85 mm


Width	38 mm
Length	94 mm
Color	gray aluminum
Locking type	Screw locking, cylinder head
Tightening torque, mounting screw	1.5 Nm +- 0.3 Nm
Fixing screws	M4
No. of cable exits	1
Cable exit	Angled
Type of the screw connection	M32 x 1.5
Pg screw connection	None
Degree of protection	IP65/IP68/IP69K
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Seal material	NBR, conductive
Material of locking screw	V2A
Inflammability class acc. to UL 94	V0


Accessories

Item	Designation	Description
General		
0806628	GPE 22X22 SR/R	Plastic label sheet, self-adhesive double-layer plastic labels, with rounded edges, radius 2 mm, material thickness: 0.8 mm, suitable for plotting and engraving, color: silver

Diagrams/Drawings

Dimensioned drawing

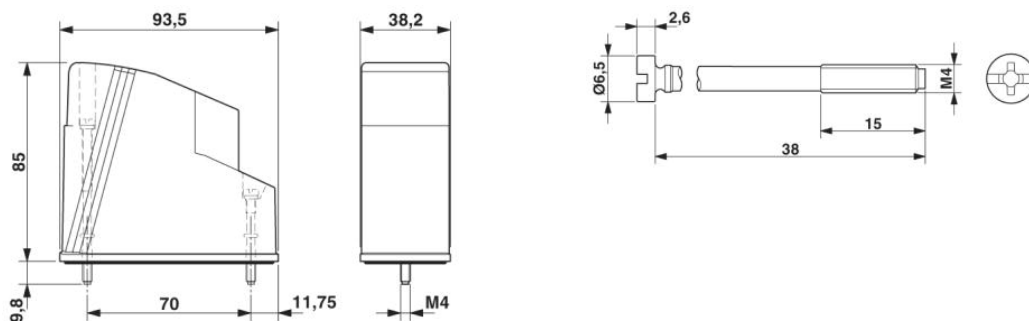

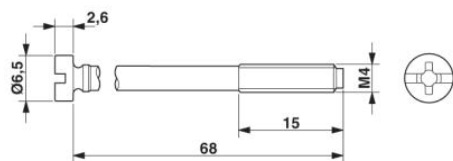

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;