


# HC-B 16-TFL-60/O1PG21S

Order No.: 1673795

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1673795>

Sleeve housing, for single locking latch, height 60 mm, without screw connection, 1x Pg21, lateral cable entry

**Commercial data**

GTIN (EAN)	 4 017918 149680
sales group	D002
Pack	10 pcs.
Customs tariff	85389099

**Product notes**

WEEE/RoHS-compliant since:  
01/31/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****General data**

Note	For contact inserts HC-B16, BB32, D40, DD72, HS6, M, K
Design	B16
Height	60 mm
Width	43 mm
Length	94 mm

Housing type	Sleeve housings
Locking type	for single locking latch
Cable exit	Lateral
Pg screw connection	None
Type of the screw connection	1x Pg21
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray

### Certificates / Approvals




Certification

GOST

### Diagrams/Drawings

Dimensioned drawing

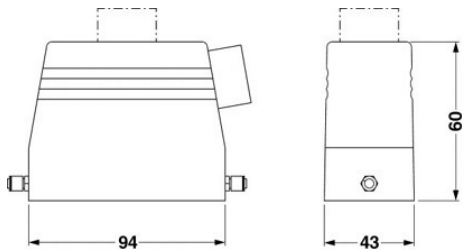

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;