

## Housing - HC-B 16-TFQ-N-O1STM32S - 1460160


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON B16 sleeve housing, for double locking latch, height: 65 mm, with 1 x M32 thread, lateral cable outlet



### Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 696098
GTIN	4046356696098
Weight per Piece (excluding packing)	180.000 g
Custom tariff number	85389099
Country of origin	Germany

### Technical data

#### Dimensions

Height	65 mm
Width	43 mm
Length	94 mm

#### Ambient conditions

Degree of protection of housing (IP)	IP65
Ambient temperature (operation)	-40 °C ... 125 °C

#### General

Note	For contact inserts HC-B16, BB32, BBB40, D40, DD72, HS6, M, K
Size	B16
Housing type	Sleeve housing

# Housing - HC-B 16-TFQ-N-O1STM32S - 1460160

## Technical data

### General


Locking type	for double locking latch
No. of cable outlets	1
Cable exit	lateral
Screw connection	none
Type of the screw connection	1x M32
Housing material	Aluminum die-cast
Housing surface material	Powder-coated, gray

### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

Dimensional drawing

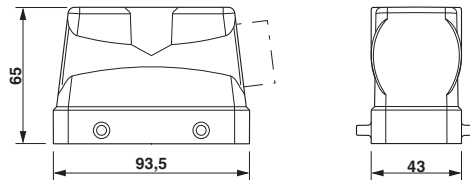

Dimensional drawing

## Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

## Housing - HC-B 16-TFQ-N-O1STM32S - 1460160

### Approvals

EAC



7500651.22.01.00246