

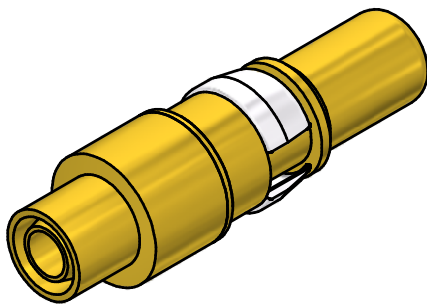


STRIPPING DIMENSIONS

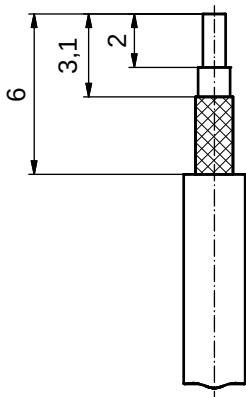

ASSEMBLY TOOLING: (b)

1. CENTER CONTACT:
SOLDERED
2. OUTER CONDUCTOR:
SOLDERED OR CRIMPED
USE CRIMP TOOL: 360X10519X
WITH TOOL INSERT: 360X11019X
INSERT CAVITY B: HEX 3.25 / .128"

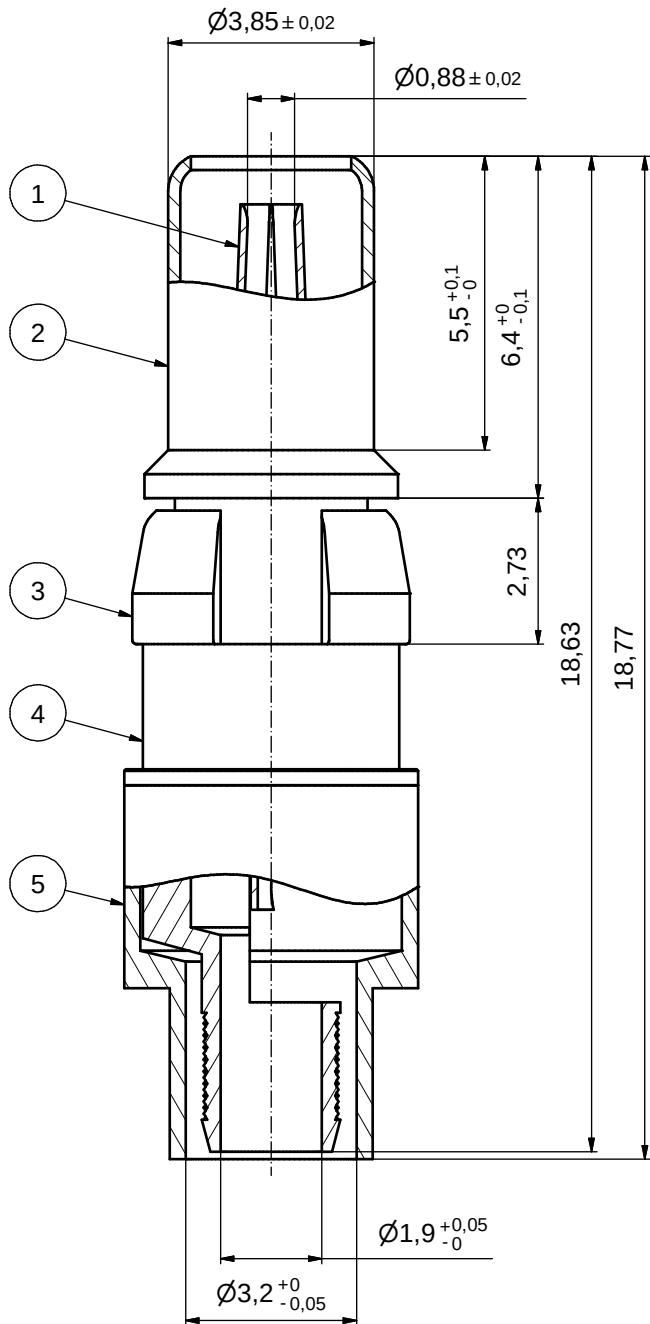

(b)

Part no.	Finish Pos.1	Finish Pos.2	Finish Pos.3	Finish Pos. 4/5
131A30019X	GOLD FLASH over NICKEL	GOLD FLASH over NICKEL	NICKEL PLATED	GOLD FLASH over NICKEL
131C30019X	min. 30µin HARD GOLD over min. 50µin NICKEL	min. 30µin HARD GOLD over min. 50µin NICKEL	NICKEL PLATED	GOLD FLASH over NICKEL
131J30019X	min. 50µin HARD GOLD over min. 50µin NICKEL	min. 30µin HARD GOLD over min. 50µin NICKEL	NICKEL PLATED	GOLD FLASH over NICKEL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	DO NOT ALTER CAD DRAWING BY HAND				tolerance		 dim. in mm	scale: 10:1 (5:1)		
								material: see partlist		
					date	name	title: COAXIAL CONTACT PLUG 75 OHM (b) for Cable RG 179BU, 187AU center contact solder, outer contact for crimp termination			
					drawn	10.07.15				Henneboel
					appd.	10.07.15				Lehmenkühler
					norm					
					d-old					13K2IU9A
	4 x b	Ä5716	10.07.2015	K.H.				dwg no:		DIN-A3
	a	Original		(b) 13K1A5011				sh: 1		
	rev.	description	date	name					part no:	

RoHS compliant

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)
[131J30019X](#)