


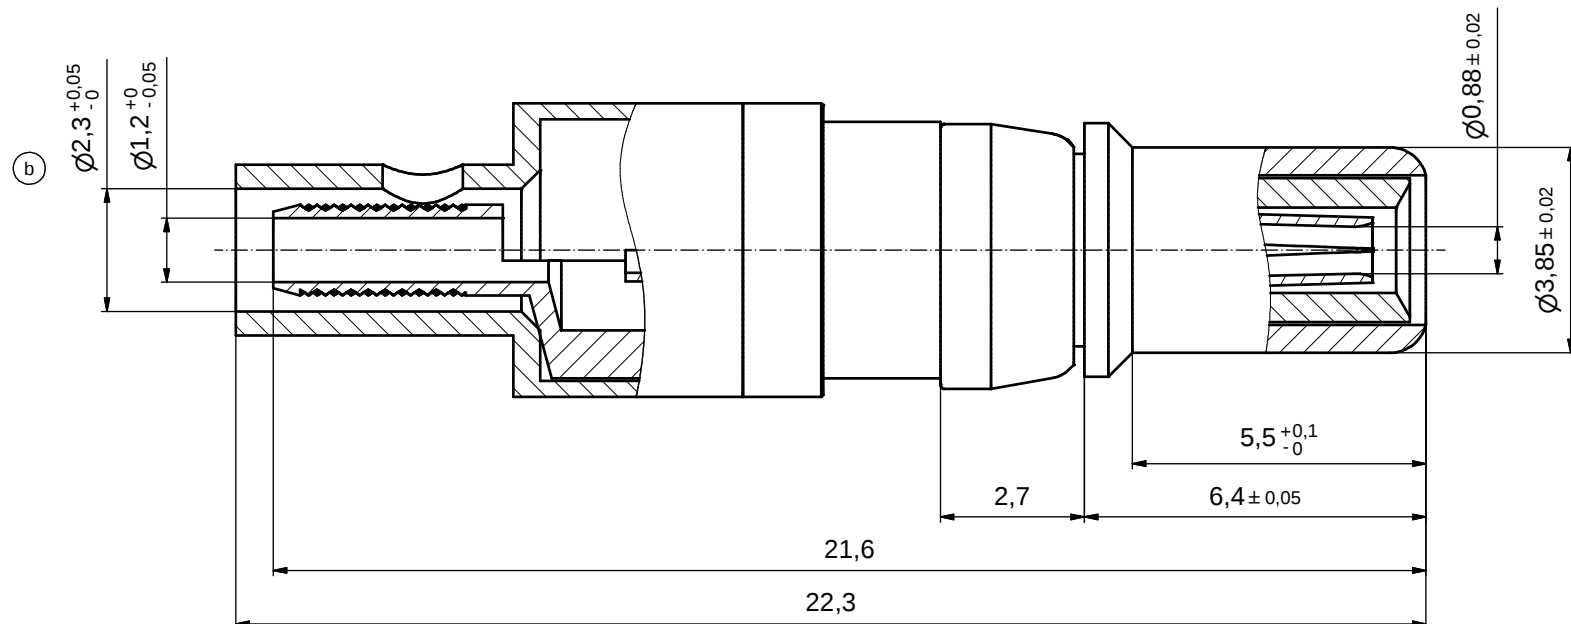

Technical drawing of a stepped shaft. The shaft has three sections of different diameters. The total length is 9,5. The first section (leftmost) has a length of 5. The second section (middle) has a length of 3. The third section (rightmost) has a length of 1,5. The shaft is shown in a perspective view with a cross-section indicated by a dashed line.

Directive 2002/95/EC
„RoHS“
Compliant

APPROVAL # FREIGABE # DEBLOCKAGE # AUTORIZACION	APPROVAL # FREIGABE # DEBLOCKAGE # AUTORIZACION # APPROVAL	
	CUSTOMER APPROVAL DATE:	
	NAME:	TITLE:
	COMPANY NAME:	
	APPROVAL # FREIGABE # DEBLOCKAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance		 dim. in mm	
					date	name	
				drawn	18.09.2001	E.Mickenbecker	
				appd.	18.09.2001	A.Mickenbecker	
				norm			
				d-old			
2 x b	Ä3555	29.01.2010	K.H.				
a	Origin						
rev.	description	date	name				



FOR CRIMPING OF CRIMP SLEEVE:
USE CRIMP TOOL: 360X10519X
WITH TOOL INSERT: 360X11019X
INSERT CAVITY C; HEX 2,67 (.105)

scale:	10:1
--------	------

material:

	title:
--	--------

COAXIAL CONTACT PLUG 50 OHM
inner conductor for solder termination
outer conductor for solder or crimp termination

dwg no:

Inventor 10	(b)	DIN-
-------------	-----	------

13K2IV6A

DIN-

A3

sh: 1

part no:

131J20019X