

D-SUB power contact - VS-ST-SC-2,6 - 1655483

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Power contact, for D-SUB combination inserts, screw connection, pin, straight, rated current 20 A, gold-plated

RoHS

Key Commercial Data

Packing unit	1 STK
Minimum order quantity	30 STK
GTIN	 4 046356 029414
GTIN	4046356029414
Weight per Piece (excluding packing)	2.770 g
Custom tariff number	85366990
Country of origin	Germany

Technical data

Mechanical characteristics

Insertion/withdrawal cycles	≥ 500
Connection method	Screw connection
Type of contact	Pin
Conductor cross section	0.75 mm ² ... 2 mm ²
Connection cross section AWG	18 ... 14
Insertion force per signal contact	≤ 7.00 N
Extraction force per signal contact	approx. 5 N
Insulation resistance	≥ 5 G Ω

Ambient conditions

Ambient temperature (operation)	-55 °C ... 155 °C
---------------------------------	-------------------

D-SUB power contact - VS-ST-SC-2,6 - 1655483

Technical data

Material data

Contact material	Copper alloy
Contact surface material	Hard gold-plated over nickel

Electrical characteristics


Rated current	20 A
---------------	------

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Dimensional drawing

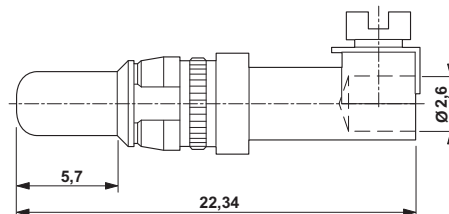

D-SUB power contact pin

Classifications

eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27261202
eCl@ss 7.0	27440204
eCl@ss 8.0	27440204
eCl@ss 9.0	27440204

ETIM

ETIM 2.0	EC000796
ETIM 3.0	EC000796
ETIM 4.0	EC000796

D-SUB power contact - VS-ST-SC-2,6 - 1655483

Classifications

ETIM

ETIM 5.0	EC000796
ETIM 6.0	EC000796

UNSPSC

UNSPSC 6.01	30211923
UNSPSC 7.0901	39121522
UNSPSC 11	39121522
UNSPSC 12.01	39121522
UNSPSC 13.2	39121522

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		B.01742
-----	---	---------

Accessories

Accessories

Assembly tool

Contact removal tool - HC-M4-KOAX-EWZ - 1676747



Contact removal tool for coaxial contacts

