

VS-09-BU-DSUB-CD-G

Order No.: 1688845

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1688845>

D-SUB contact carrier, shell size 1, for nine signal contacts, contact type socket, for crimp contacts, straight, fixing with 4-40 UNC thread, for panel mounting frame VS-09-...

Commercial data	
GTIN (EAN)	4017918822972
sales group	D501
Pack	10 pcs.
Customs tariff	85366990
Weight/Piece	0.00574 KG
Catalog page information	Page 320 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
06/14/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Mechanical characteristics**

Number of positions	9
Insertion/withdrawal cycles	≥ 500
Type of connection	Crimp connection
Ambient temperature (operation)	-55 °C ... 125 °C

Material data

Inflammability class acc. to UL 94	V0
Housing material	Steel, yellow chromated
Contact carrier material	Polyester GF

Electrical characteristics

Rated voltage (III/3)	125 V
Rated current	5 A


Accessories

Item	Designation	Description
Contacts		
1688997	VS-BU-CD-1,0/14,4/0,2	Crimp contact, for D-SUB contact inserts with standard contact density, socket, connection cross section AWG 28 ... 24, turned, gold-plated
1688984	VS-BU-CD-1,0/14,4/0,5	Crimp contact, for D-SUB contact inserts with standard contact density, socket, connection cross section AWG 24 ... 20, turned, gold-plated

Diagrams/Drawings

Dimensioned drawing

D-SUB contact carrier

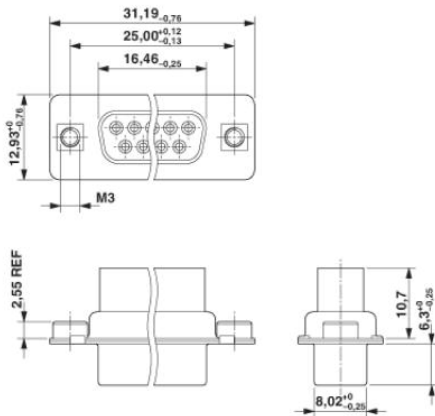

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;