

VS-15-ST-DSUB-HD-CD-B

Order No.: 1655195

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1655195>

D-SUB contact carrier, shell size 2, for 26 signal contacts, contact type pin, for crimp contacts, straight, fixing with a 3 mm hole, for panel mounting frame and sleeve housing VS-15-...

Commercial data

GTIN (EAN)	4046356029131
sales group	D501
Pack	10 pcs.
Customs tariff	85369010
Weight/Piece	0.00552 KG
Catalog page information	Page 321 (PC-2009)

Product notesWEEE/RoHS-compliant since:
06/14/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Mechanical characteristics**

Number of positions	26
Insertion/withdrawal cycles	≥ 500
Type of connection	Crimp connection
Ambient temperature (operation)	-55 °C ... 125 °C

Material data

Inflammability class acc. to UL 94	V0
------------------------------------	----

Housing material	Steel, yellow chromated
Contact carrier material	Polyester GF

Electrical characteristics

Rated voltage (III/3)	60 V
Rated surge voltage	1 kV
Rated current	3 A


Accessories

Item	Designation	Description
1655276	VS-ST-CD-HD-1,0/13,5/0,37	Crimp contact, for D-SUB contact inserts with high density, pin, connection cross section AWG 22, turned, gold-plated

Diagrams/Drawings

Dimensioned drawing

D-SUB contact carrier

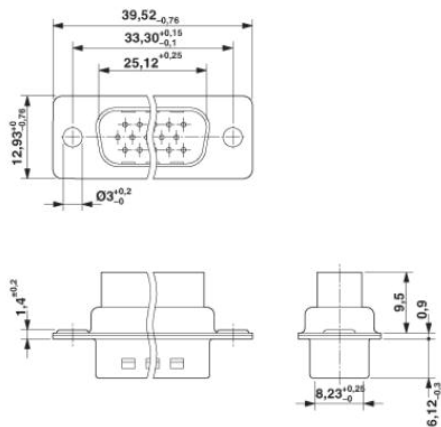

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;