


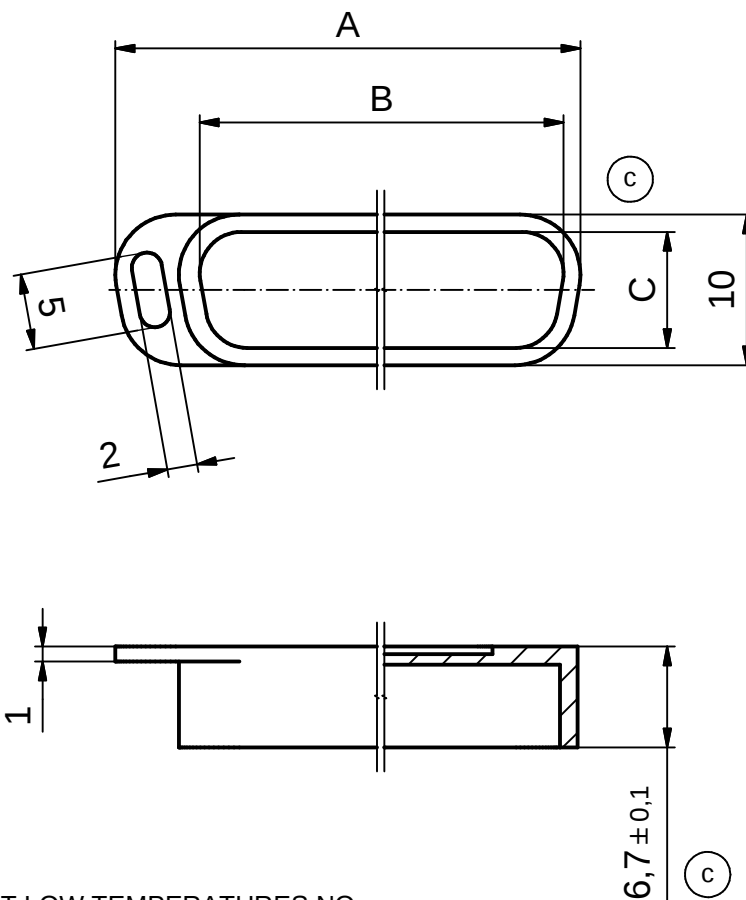


(b)

TO PREVENT DAMAGE AT LOW TEMPERATURES NO
IMPACT OR EXTREM MECHANICAL LOAD SHOULD
APPLIED TO THE CAP:
MECHANICAL LOAD SHOULD BE APPLIED ABOVE 0°C

(c) (c)

POS.	A	B	C	Part No.
9	22,9	16,5	7,9	160X10449X
15	31,4	24,7	7,7	160X10459X
25	44,5	38,0	7,9	160X10469X
37	60,6	54,5	7,7	160X10479X

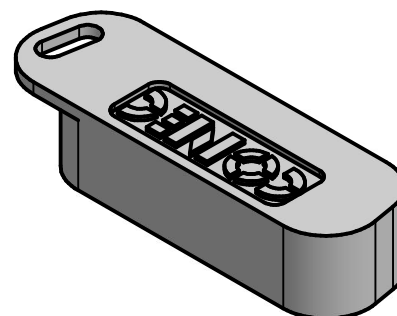


(b)

NOTES:

1. MATERIAL: TPE, BLACK
2. TEMPERATURE RANGE: -30°C - +80°C

Directive 2002/95/EC
„RoHS“
Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	DO NOT ALTER CAD DRAWING BY HAND				tolerance DIN 16901 - 150			 dim. in mm	scale: 2:1	
									material: (b) SEE NOTES	
						date	name	title: DUST CAP for socket connector 9 - 37 pos.		
					drawn	18.07.1995	Barcinski			
					appd.	18.07.1995	Mickenbecker			
					norm					
	5 x c	Ä3569	05.02.2010	K.H.	d-old			dwg no: Inventor 10 (c) DIN-A4		
	3 x b	Ä2150	17.01.2005	Lehmen						
	a	Origin								
	rev.	description	date	name				part no: SEE TABLE		sh: 1

CONEC®