


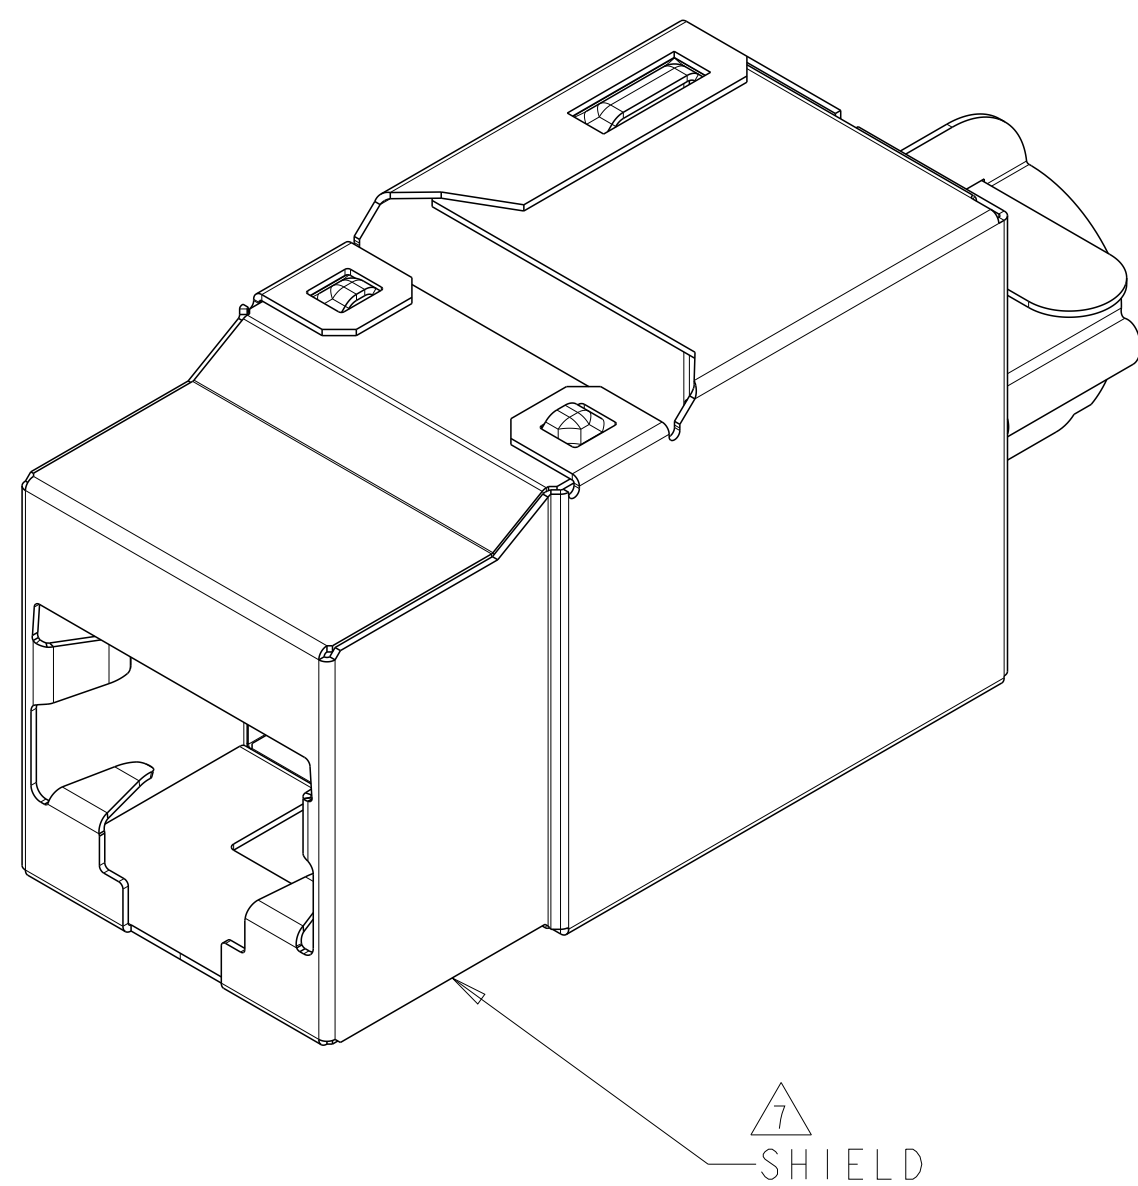
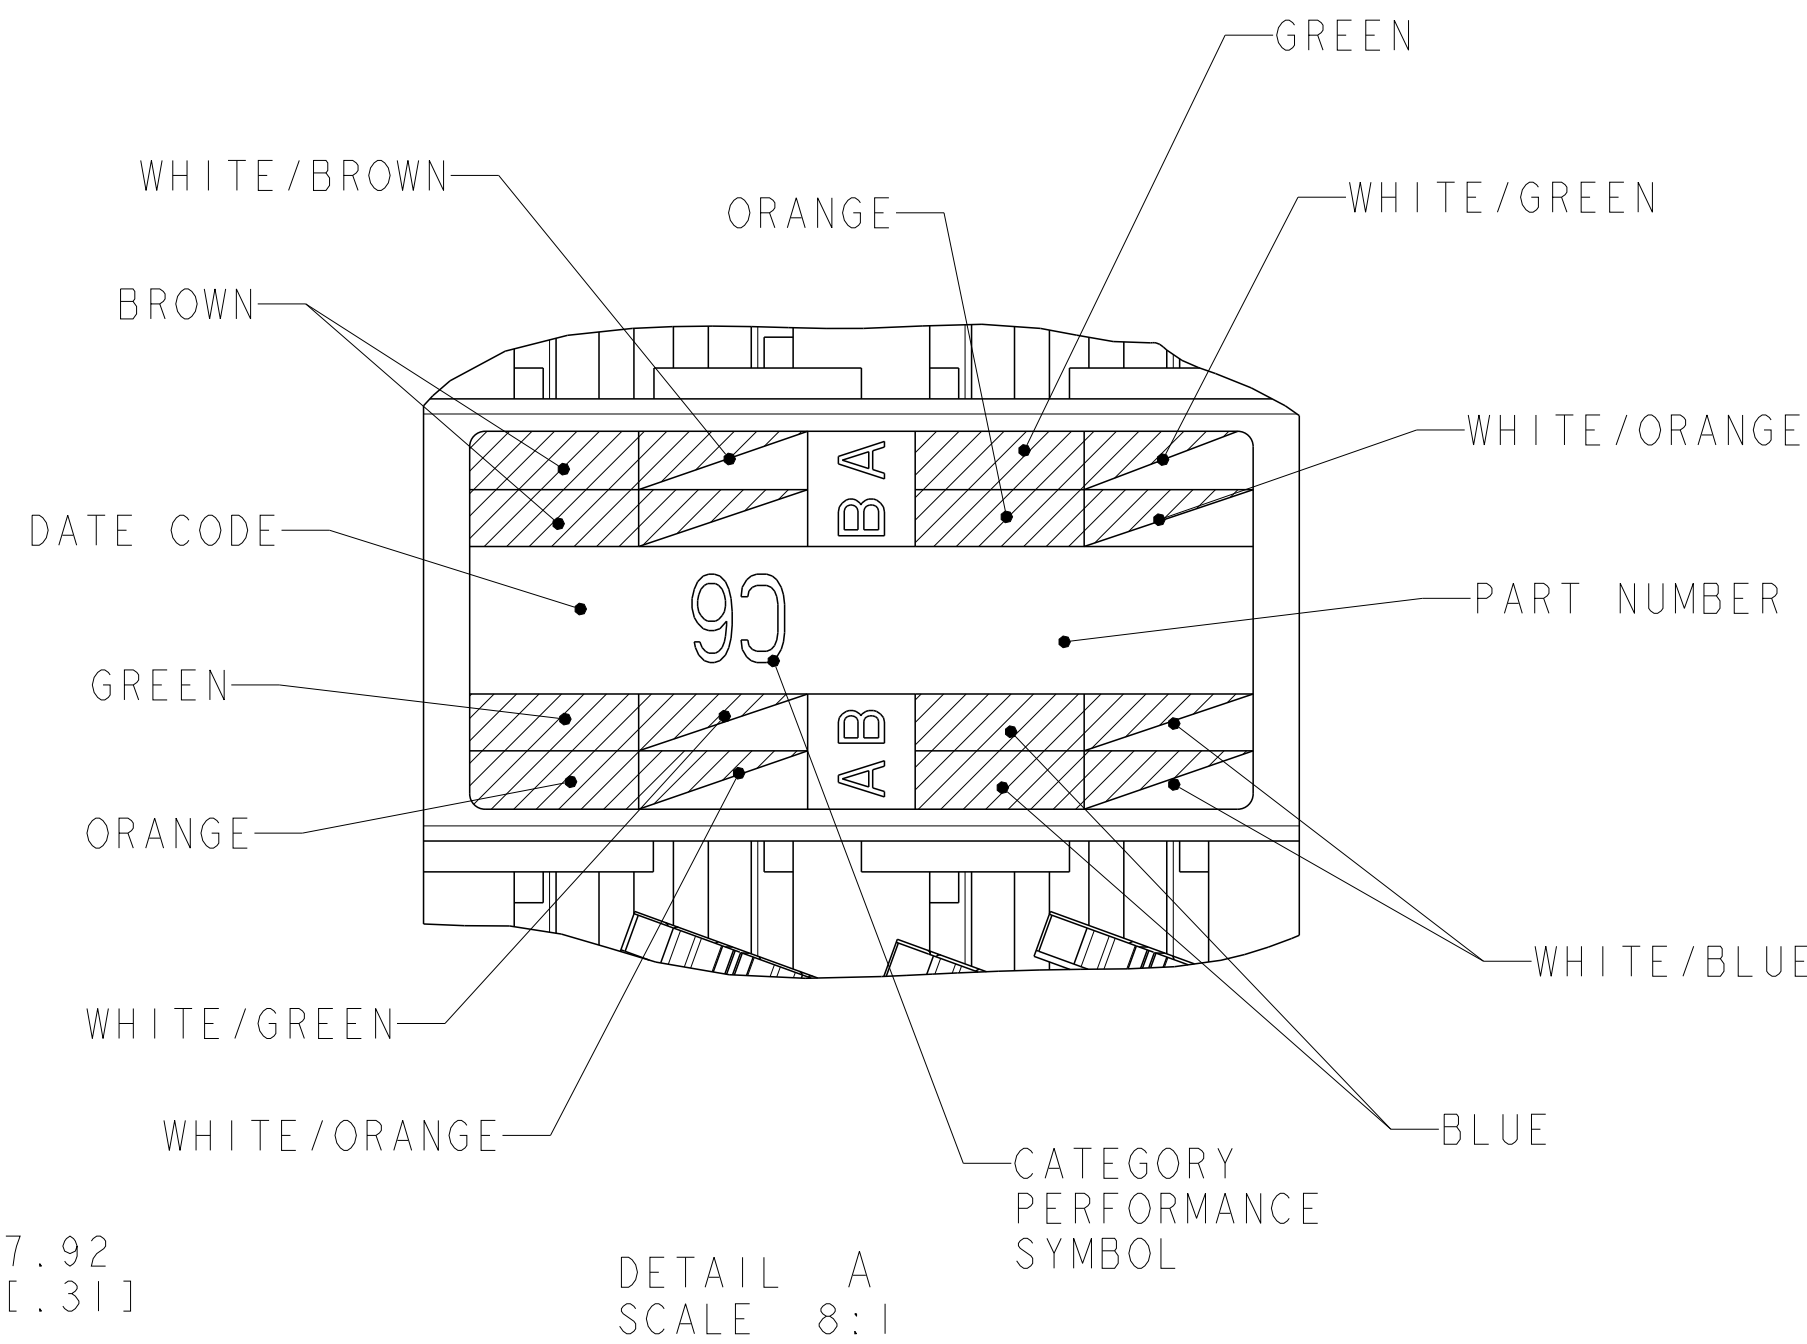
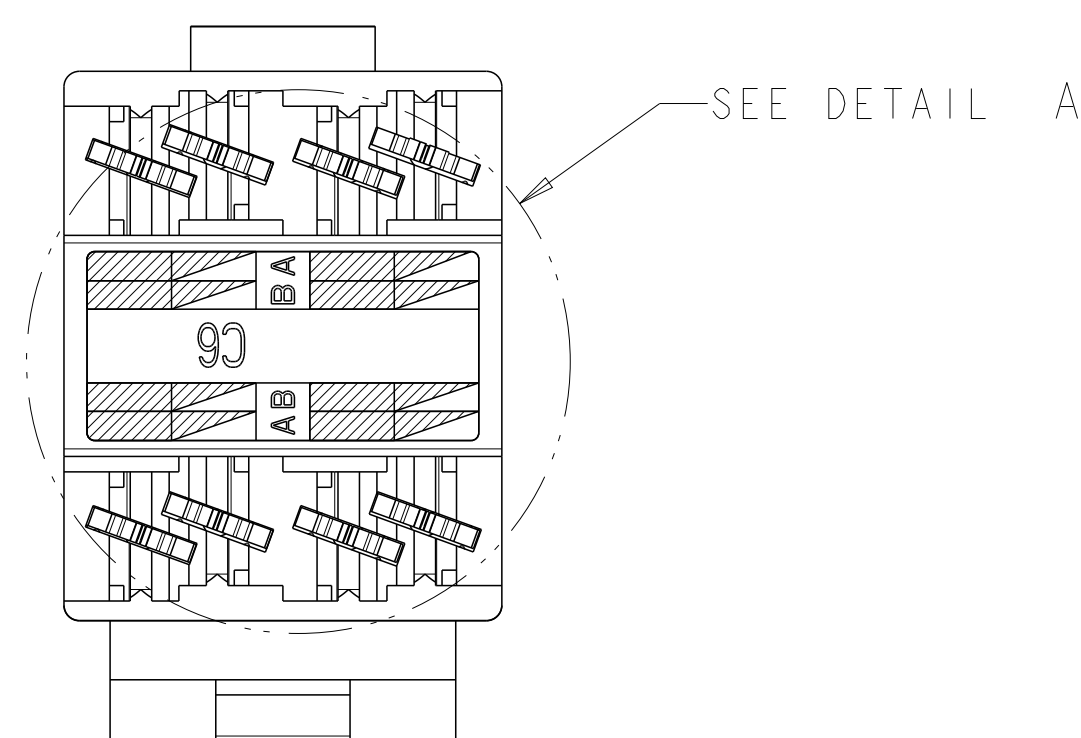
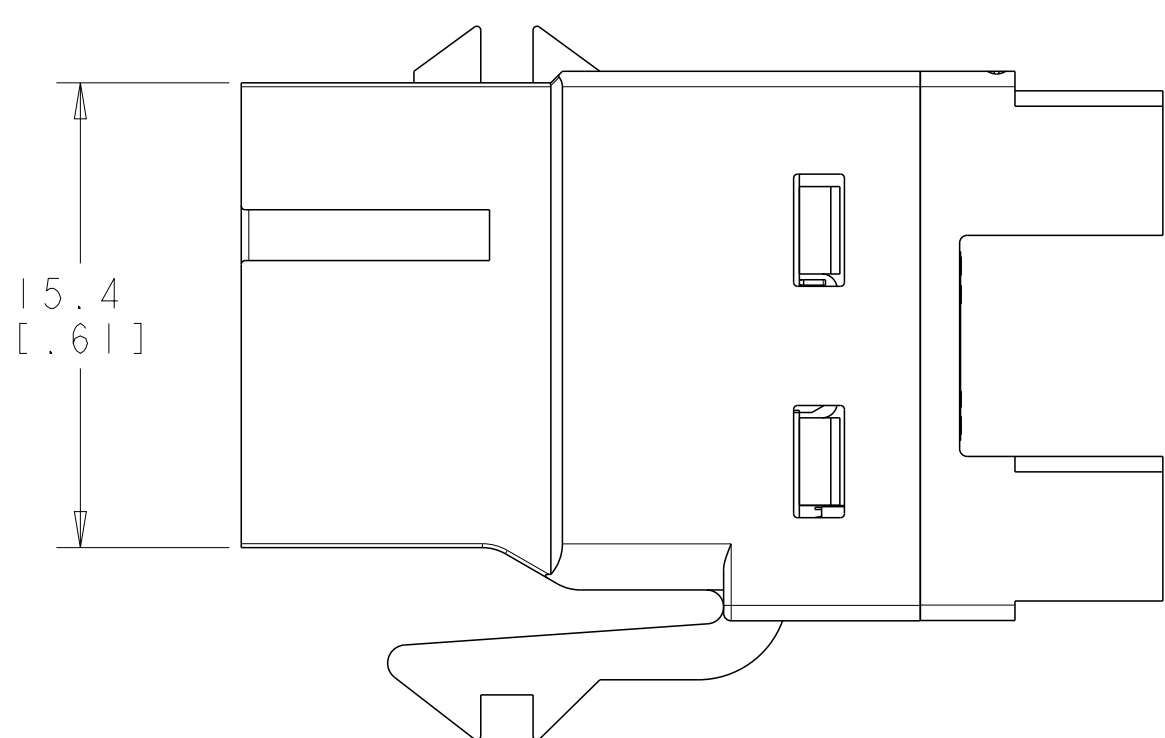


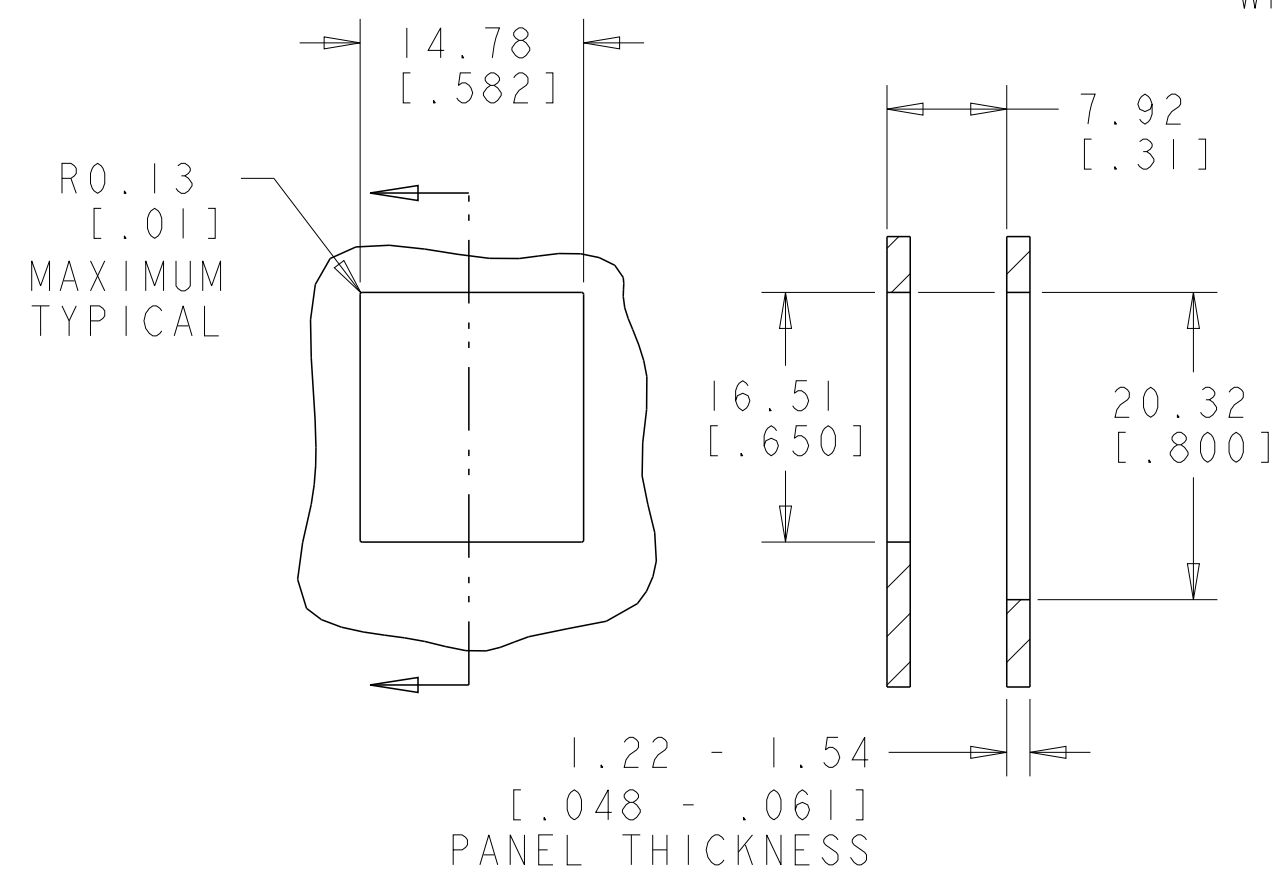

1. MATERIAL: JACK HOUSING - POLYCARBONATE, 94V-0 RATED.
110 BLOCK - POLYCARBONATE.
ARRAY TRAY - PBT POLYESTER.
JACK CONTACTS ARRAY - BERYLLIUM COPPER, PLATED WITH
1.27µm [.000050] MINIMUM THICK GOLD IN LOCALIZED
AREA AND 3.81µm [.000150] MINIMUM THICK MATTE TIN IN
BOARD INTERFACE AREA OVER 1.27µm [.000050] MINIMUM THICK
NICKEL UNDERPLATE.
IDC TERMINALS - PHOSPHOROUS BRONZE, PLATED WITH
3.81µm [.00015] MINIMUM THICK MATTE TIN OVER
1.27µm [.00005] MINIMUM THICK NICKEL UNDERPLATE.
2. SL 110 JACK WILL TERMINATE 22-24 AWG SOLID AND 24-26 AWG
STRANDED CONDUCTORS, 1.27[.050] MAXIMUM INSULATION DIAMETER.
3. CAVITY CONFORMS TO FCC RULES AND REGULATIONS
PART 68 SUBPART F REQUIREMENTS.
4. MOUNTING PANEL THICKNESS 1.47 - 1.60 [.058 - .063].
5. THESE TWO SUGGESTED CUTOUT OPENINGS ARE USED
IN TANDEM WITH DUAL FRONT AND BACK CUTOUS.
6. ONE MODULAR JACK ASSEMBLY AND ONE SHIELD PER POLYBAG.
7. SHIELD SHIPPED NOT ASSEMBLED.
8. JACKS MATE WITH SECURE RJ45 PLUGS ONLY.
KEY COMBINATIONS 1 THROUGH 4, SHOWN ON SHEET 2.
COMPONENTS REMOVED FROM RESPECTIVE VIEWS FOR CLARITY.
9. REFER TO 408-8858 FOR TERMINATION INSTRUCTIONS USING SL
SERIES TOOL TERMINATION. REFER TO 408-8417 FOR TERMINATION
INSTRUCTIONS USING 110 PUNCH DOWN TOOL.


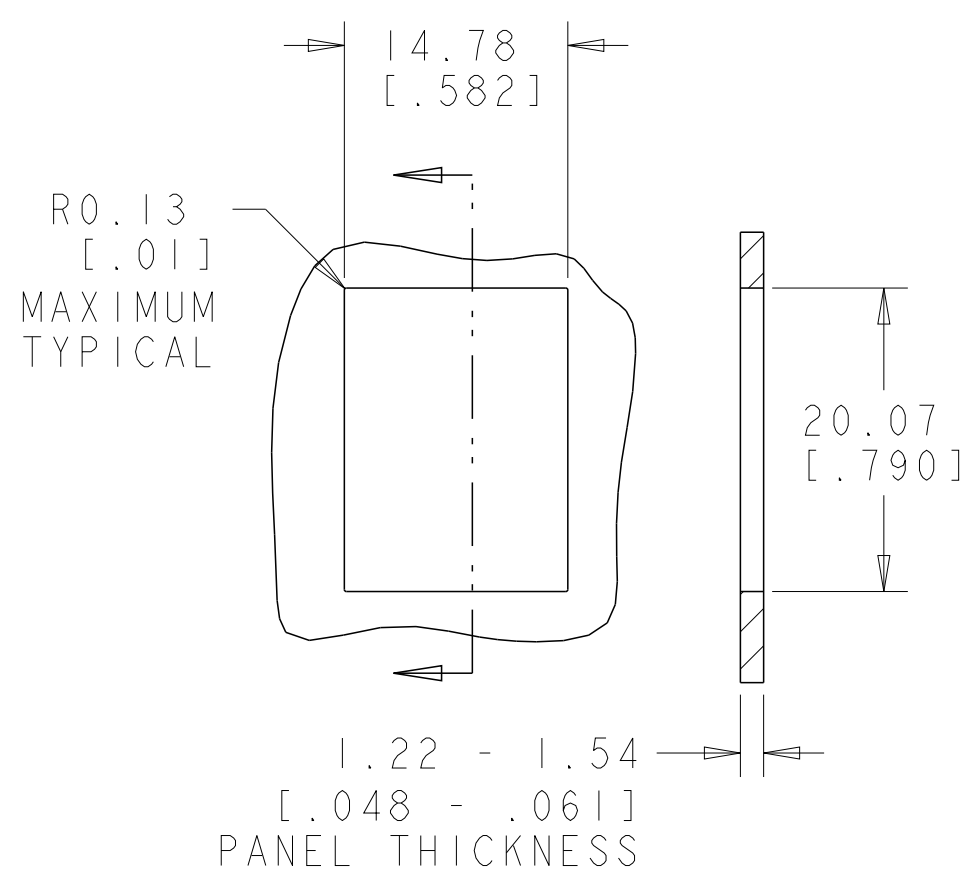


DETAIL A
SCALE 8:1

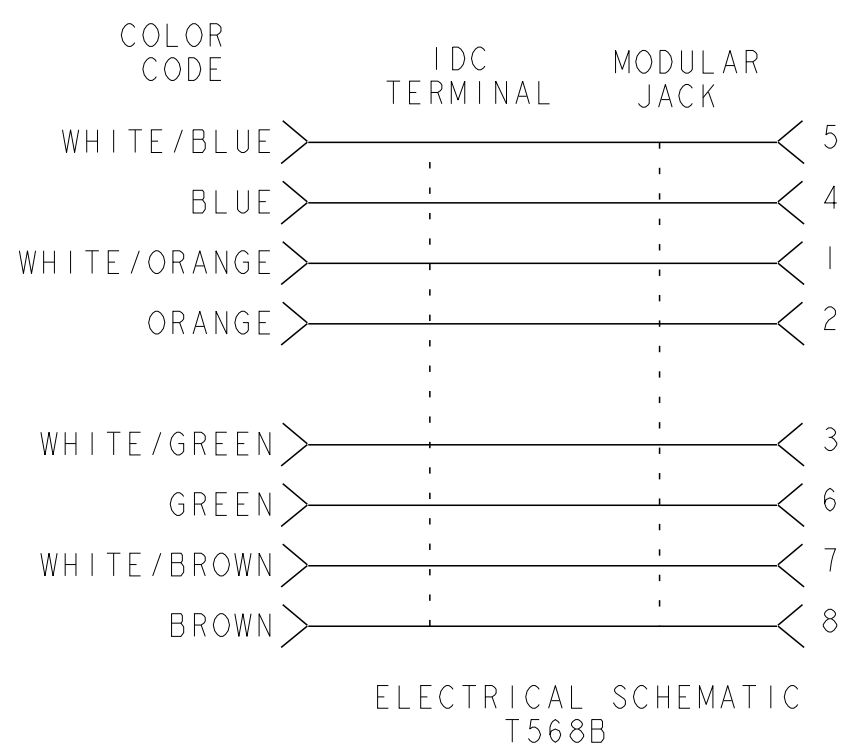


SUGGESTED FLUSH MOUNT
PANEL APPLICATION CUTOUT 


	4	BLUE	1479795-4
	3	GREEN	1479795-3
	2	YELLOW	1479795-2
	1	RED	1479795-1
PACKAGE	KEY	COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 13JUL2005 G. GARRETT CHK 13JUL2005 C. DOOLEY APVD 13JUL2005 C. DOOLEY		 TE Connectivity	
DIMENSIONS: MM[Inches]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		NAME ASSEMBLY, SL 10 JACK, SHIELDED, CAT 6, SECURE RJ45, REAR ENTRY	
		PRODUCT SPEC - APPLICATION SPEC -		SIZE A1	
MATERIAL 		FINISH 		CAGE CODE 100779	
		WEIGHT -		DRAWING NO C-1479795	
Customer Drawing				SCALE 2:1 SHEET 1 OF 2 REV J	


LOC	DIST	REVISIONS					
HM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

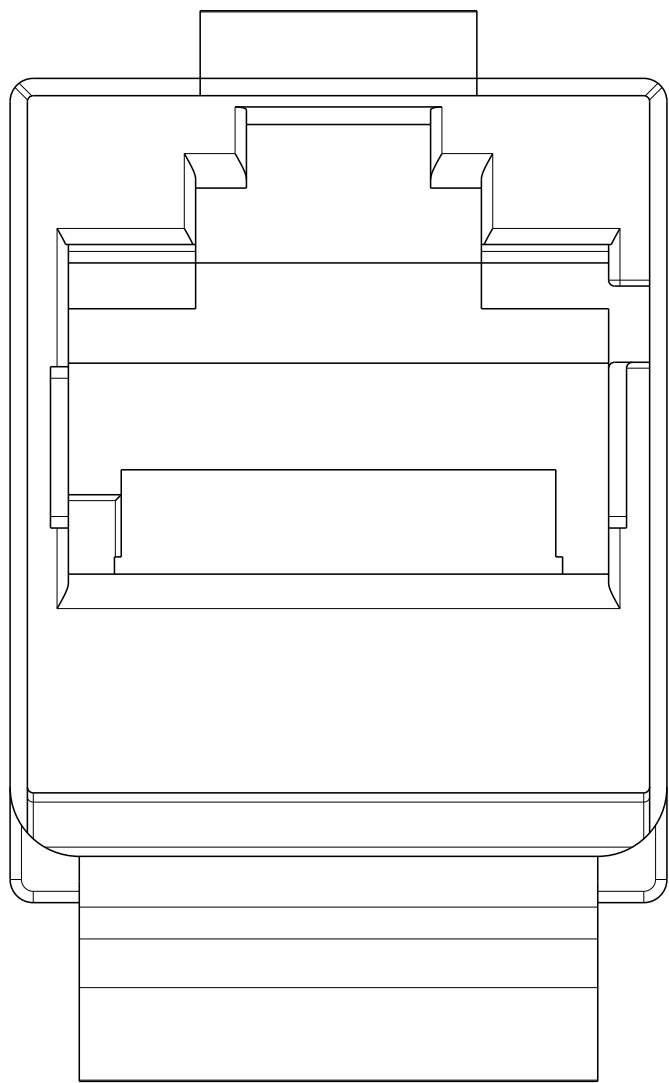


1479795-1 ⚠
KEY 1, RED

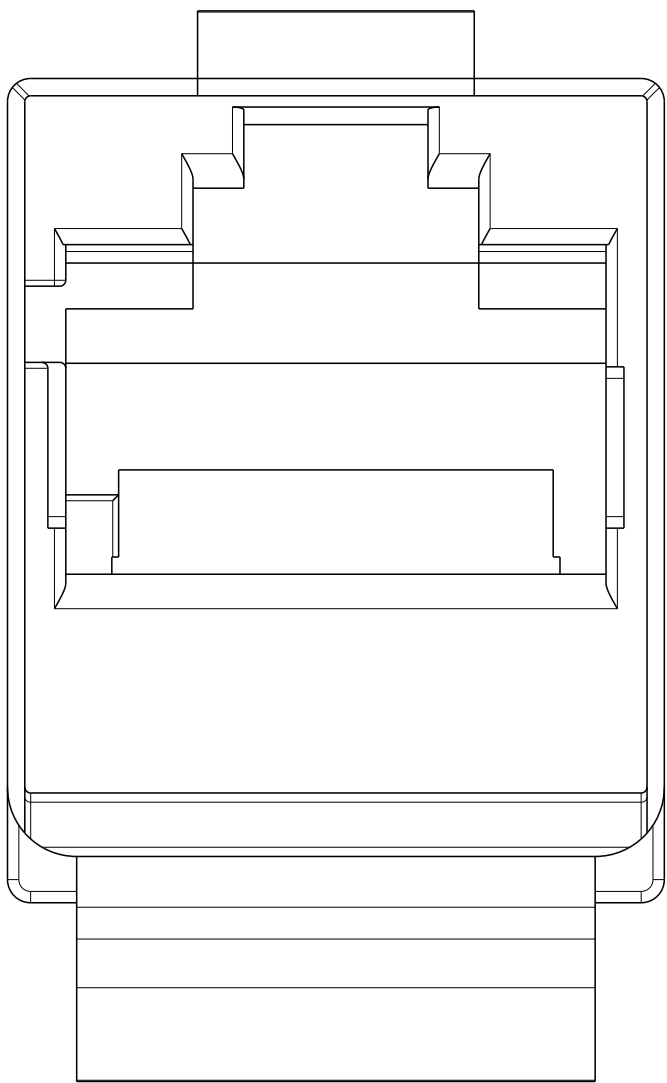


1479795-2 ⚠
KEY 2, YELLOW

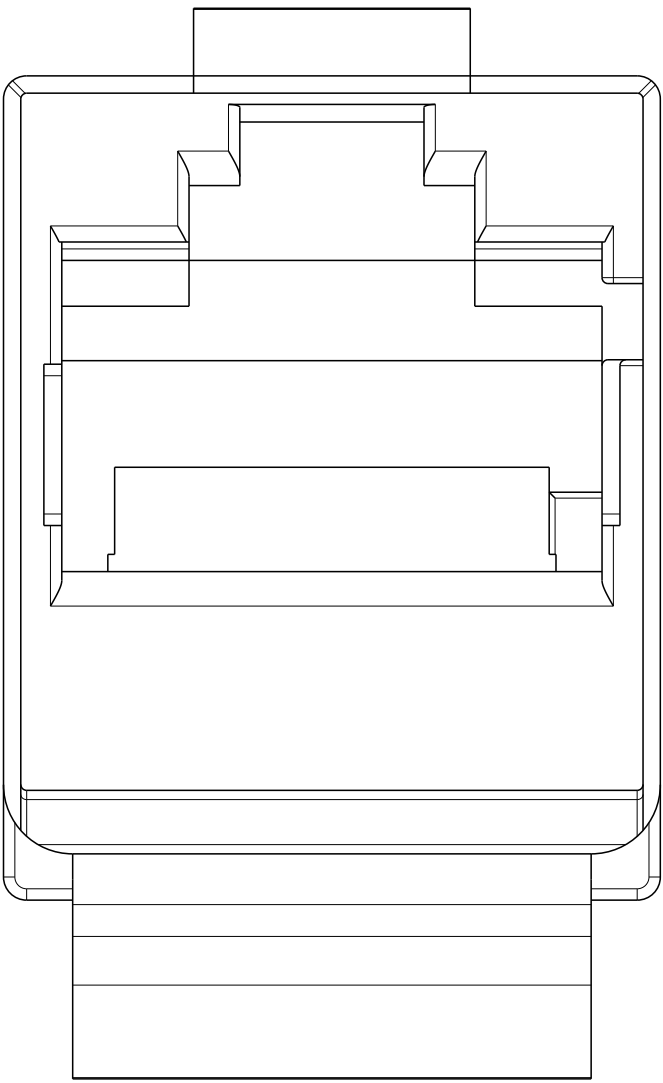

1479795-3 ⚠
KEY 3, GREEN

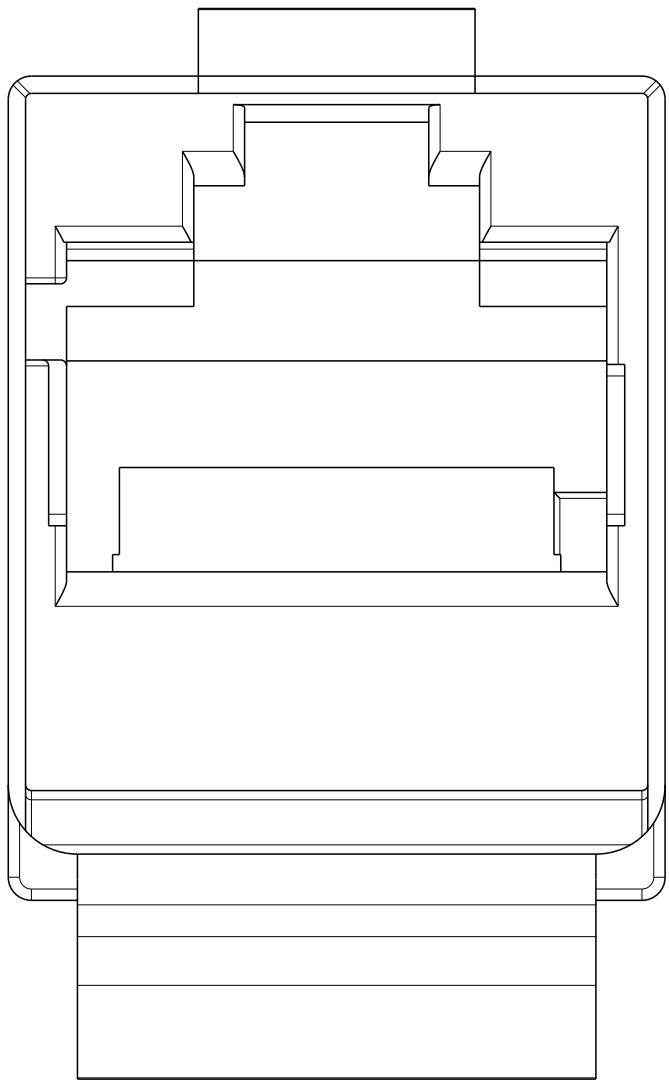

1479795-4 ⚠
KEY 4, BLUE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN G. GARRETT 13JUL2005	 TE Connectivity	
DIMENSIONS: MM[inches]		CHK C. DOOLEY 13JUL2005		
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME ASSEMBLY, SL 110 JACK, SHIELDED, CAT 6, SECURE RJ45, REAR ENTRY	
	0 PLC ±.01			PRODUCT SPEC
	1 PLC ±.02			APPLICATION SPEC
	2 PLC ±.03			SIZE
	3 PLC ±.04			CAGE CODE
	4 PLC ±.05			DRAWING NO
	ANGLES ±.01			RESTRICTED TO
FINISH		WEIGHT	A100779 C=1479795	
MATERIAL			Customer Drawing	
		SCALE	2:1	SHEET 2 OF 2
		REV	J1	