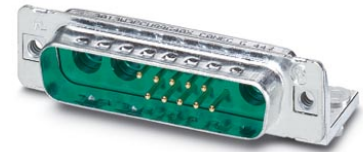



VS-25-ST-DSUB-3P-10S-LH

Order No.: 1655425

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1655425>

D-SUB contact insert, shell size 3, with 10 signal contacts, for PCB assembly, angled, accommodation for 3 combined contacts, contact type pin, fixing with M3 thread and solder pins, for panel mounting frame VS-25-...

Commercial data

GTIN (EAN)	
sales group	D501
Pack	10 pcs.
Customs tariff	85369010
Catalog page information	Page 437 (PC-2011)

Product notes

WEEE/RoHS-compliant since:
03/01/2005



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Mechanical characteristics

Insertion/withdrawal cycles	≥ 500
Connection method	Solder cup
Conductor cross-section	0.5 mm ²
Connection cross-section AWG	20
External cable diameter	2.3 mm
Insertion force per signal contact	≤ 7.00 N
Extraction force per signal contact	≤ 7 N

Ambient temperature (operation)	-55 °C ... 135 °C
---------------------------------	-------------------

Material data

Contact material	Copper alloy
Contact surface material	Hard gold-plated over nickel

Electrical characteristics


Rated voltage (III/3)	250 V
Rated current	2 A
Insulation resistance	10 TΩ

Accessories

Item	Designation	Description
Tools		
1676747	HC-M4-KOAX-EWZ	Contact removal tool for coaxial contacts

Diagrams/Drawings

Dimensioned drawing

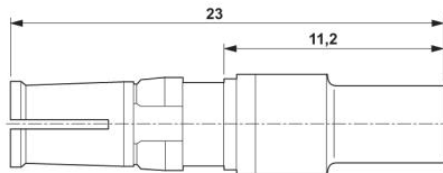

D-SUB coaxial contact socket

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;