

D-SUB crimp contact - VS-BU-CD-HD-1,0/13,5/0,37 - 1655263

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Crimp contact, for D-SUB contact inserts with high density, socket, connection cross section AWG 22, turned, gold-plated

RoHS

Key Commercial Data

Packing unit	1 STK
Minimum order quantity	100 STK
Weight per Piece (excluding packing)	0.120 g
Custom tariff number	85369010
Country of origin	Germany

Technical data

Mechanical characteristics

Insertion/withdrawal cycles	≥ 200
Connection method	Crimp connection
Type of contact	Crimp contacts
Conductor cross section	0.34 mm ²
Connection cross section AWG	22
Insulation resistance	≥ 5 GΩ
Contact type	turned

Ambient conditions

Ambient temperature (operation)	-55 °C ... 125 °C
---------------------------------	-------------------

Material data

Contact material	Copper alloy
Contact surface material	Hard gold-plated over nickel

D-SUB crimp contact - VS-BU-CD-HD-1,0/13,5/0,37 - 1655263

Technical data

Electrical characteristics


Rated current	3 A
---------------	-----

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Dimensional drawing

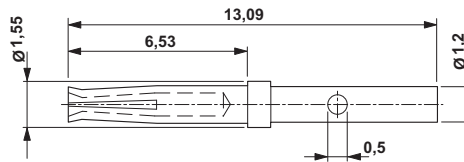

D-SUB crimp contact socket

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC B.01742
