



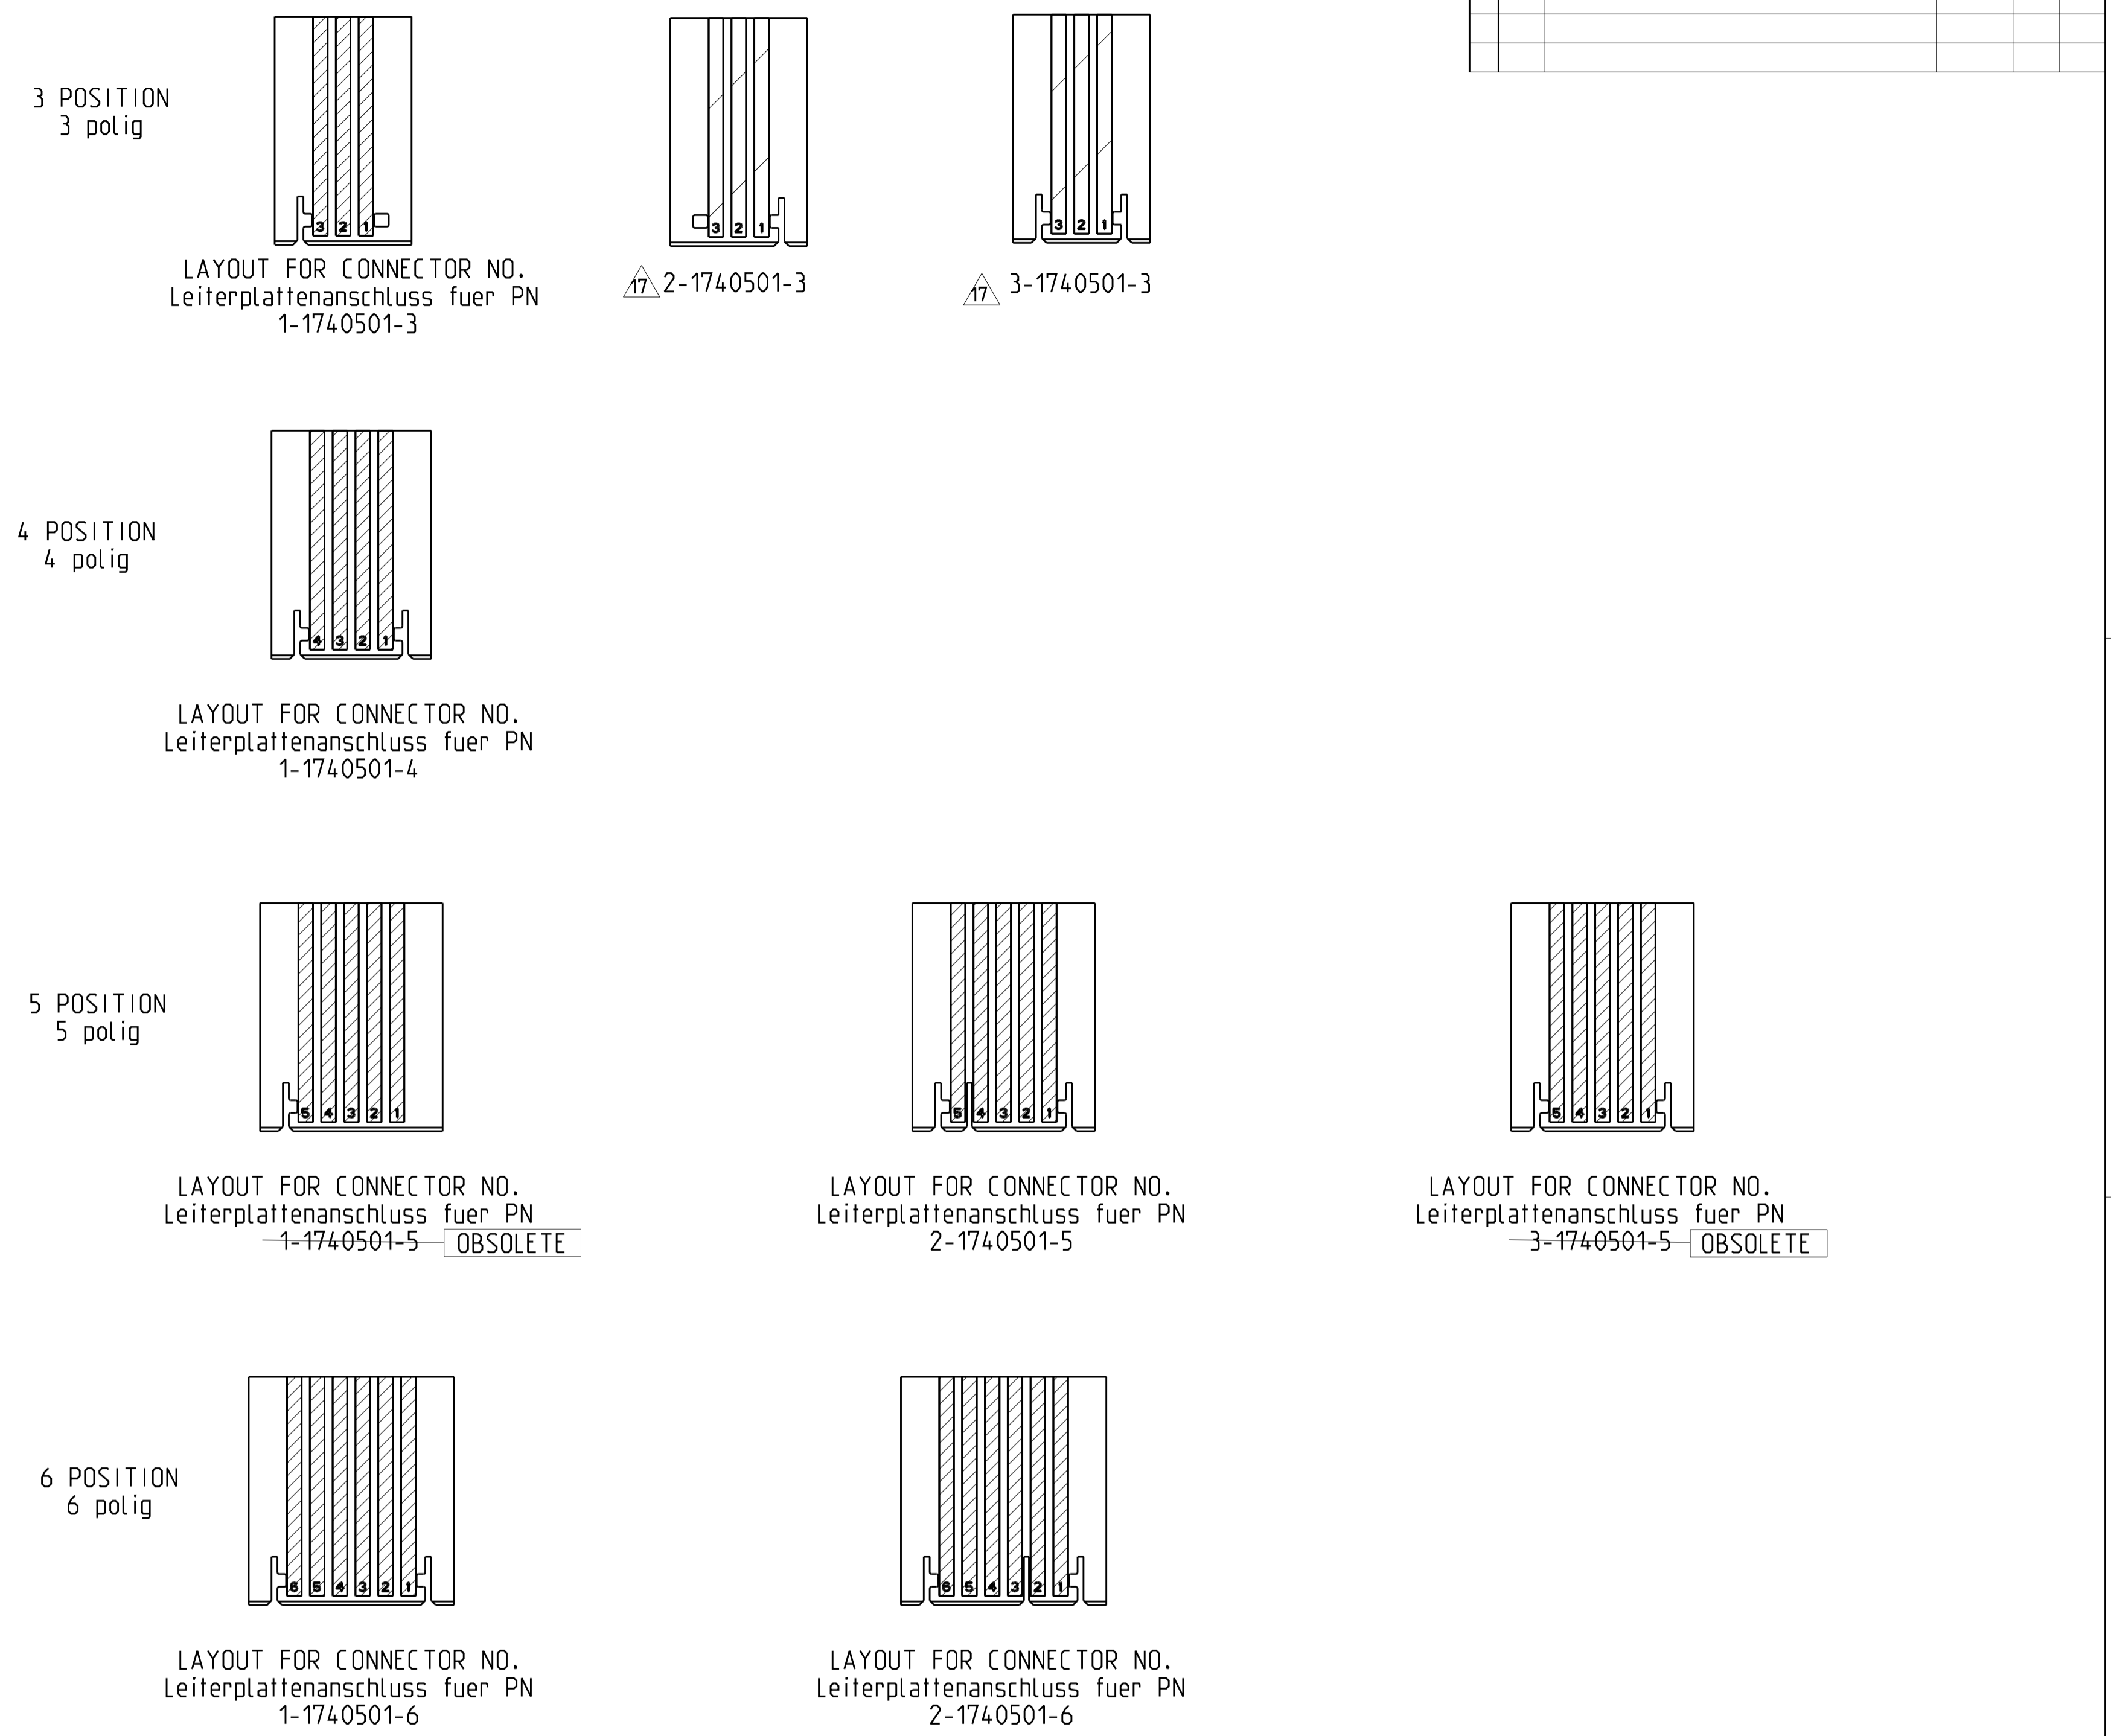

PCB LAYOUT IN GENERAL  
 Leiterplattenanschluss allgemein

3-20 POSITION  
 3-20 polig

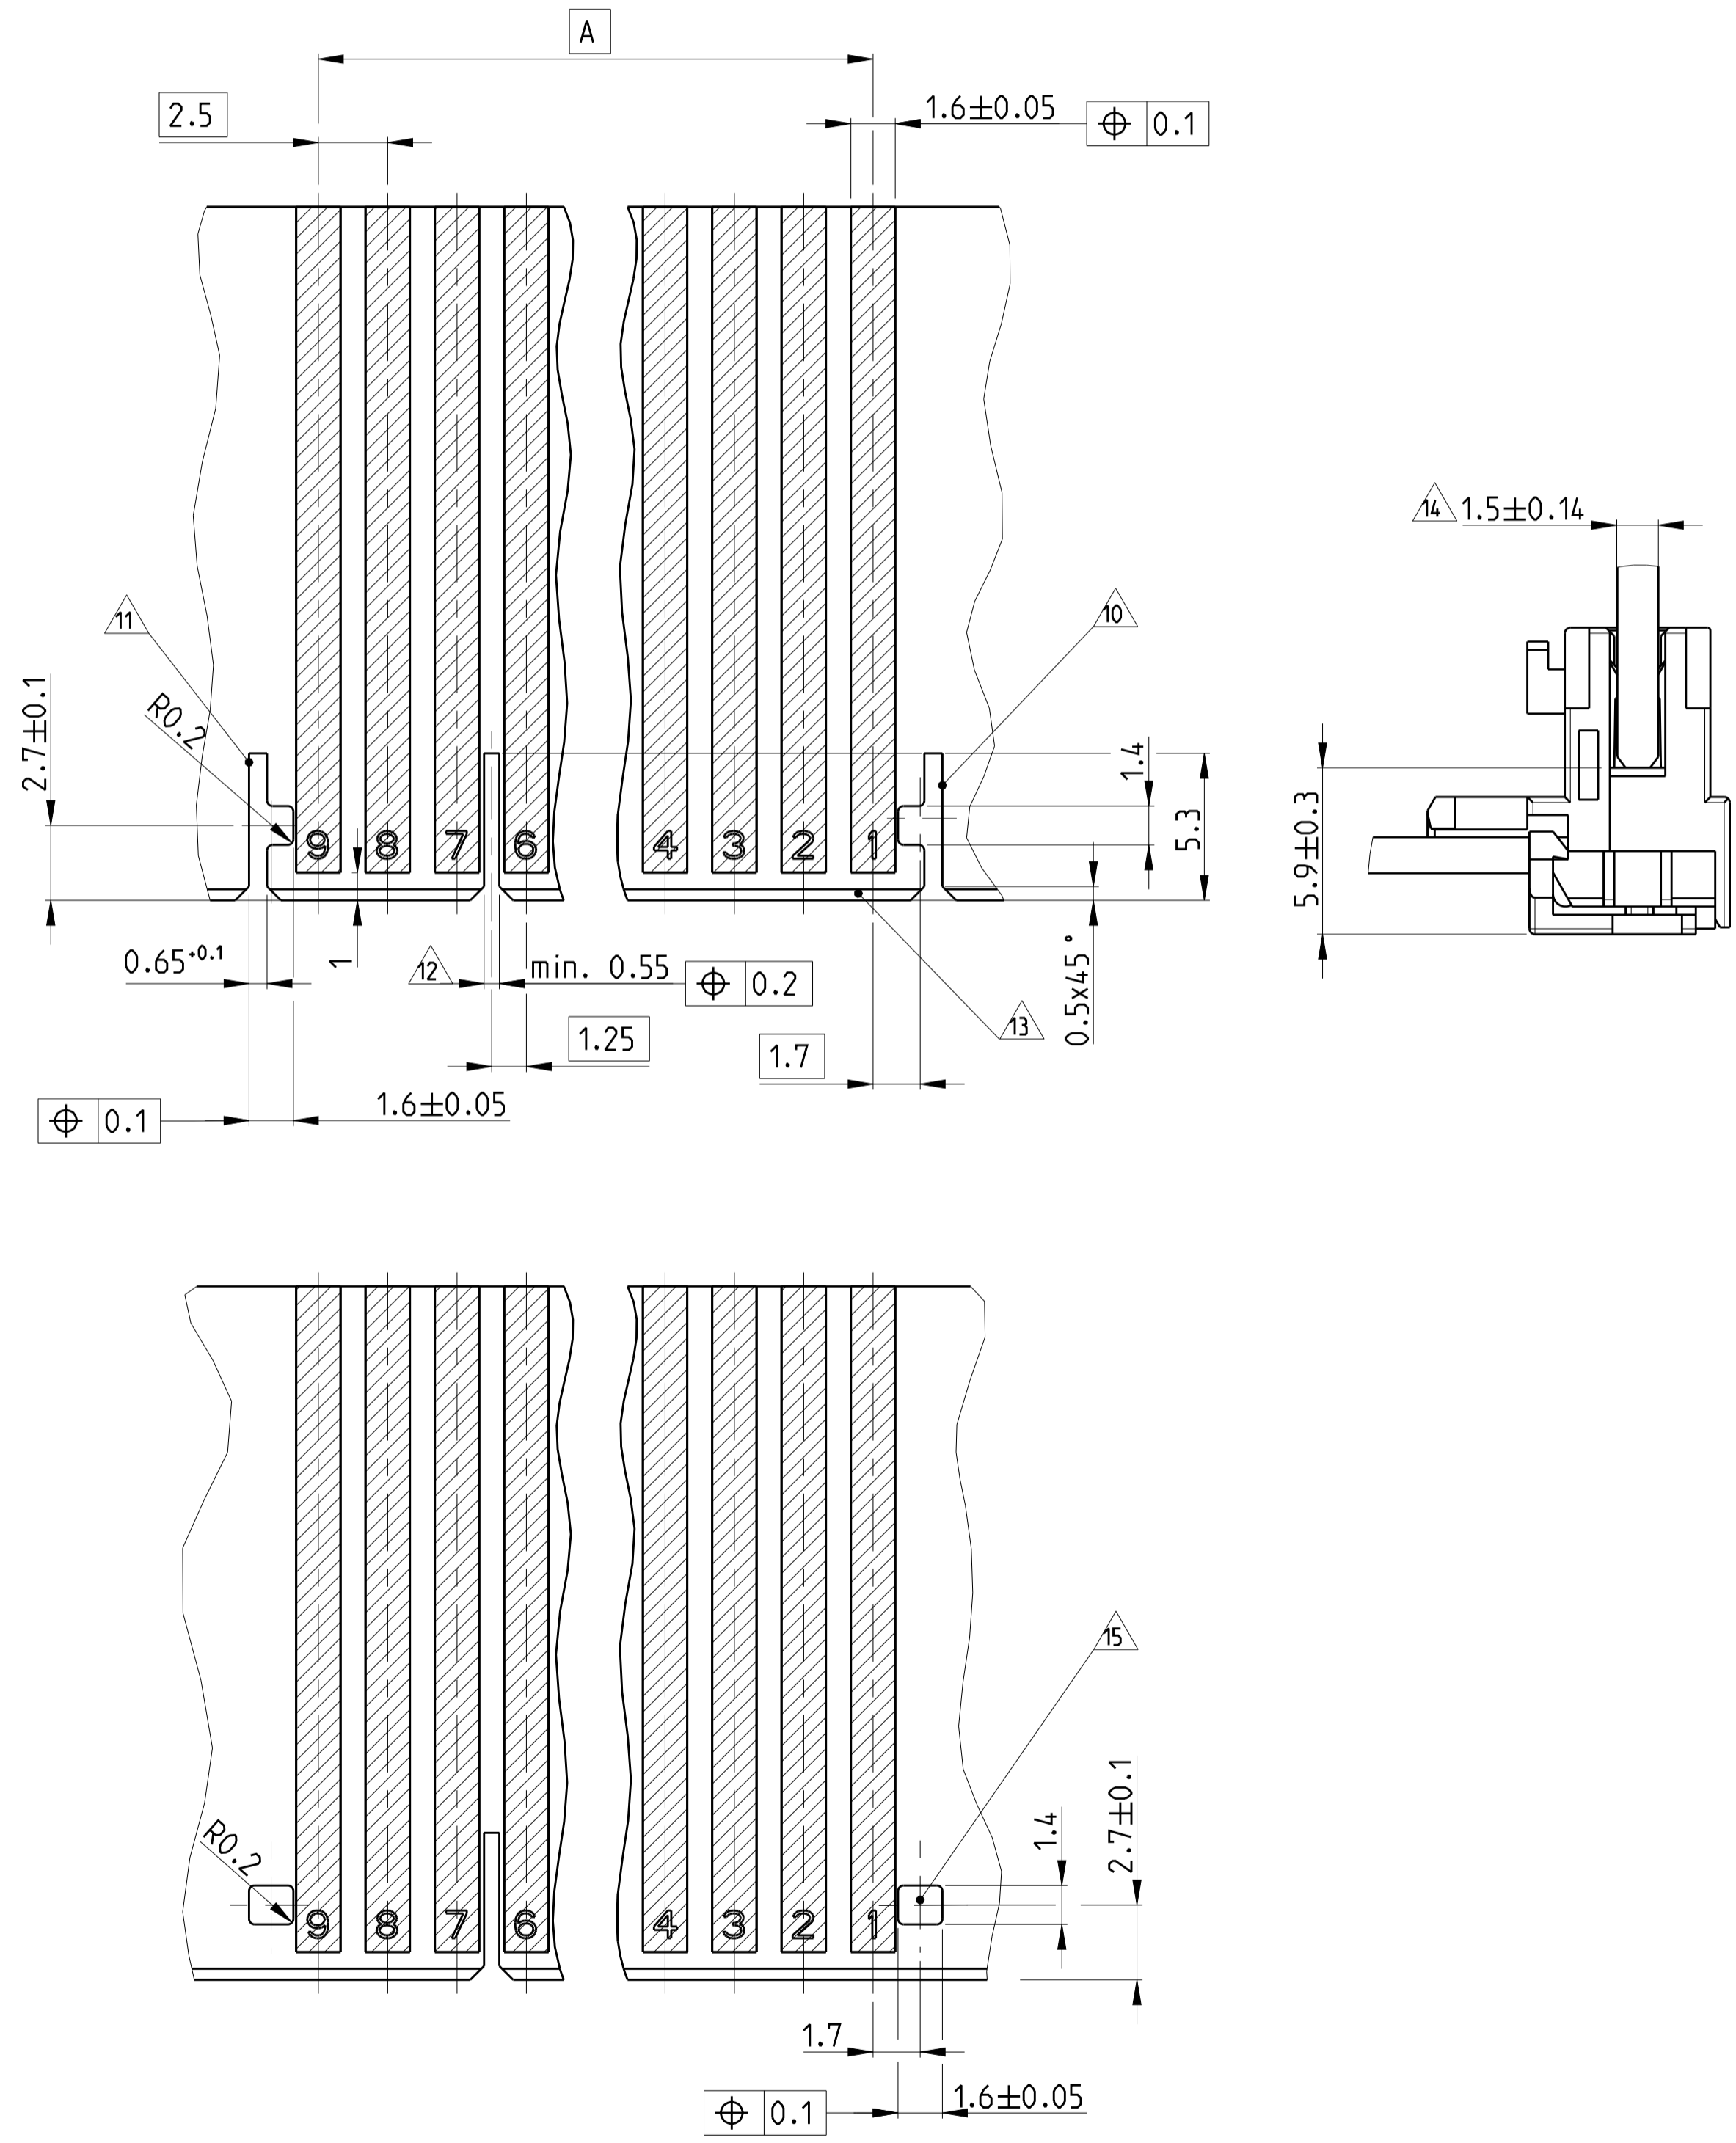

- △15 WINDOW FOR LOCKING HOOK  
Fenster fuer Rasthaken
- △14 INCLUSIVE COPPER CLADDING, SINGLE OR DOUBLE SIDED  
Inklusive Kupferkaschierung, ein oder doppelseitig
- △13 PCB TO BE PREFERABLY CHAMFERED  
Leiterplatte vorzugsweise angefast
- △12 SLOT FOR ADDITIONAL KEYING RIB BETWEEN CAVITY NO.  
Schlitz fuer zusaetzliche Kodierrippe zwischen Kammer Nr.
- △11 SLOT FOR SIDE KEYING, ON LAST CAVITY  
Schlitz fuer Seitenkodierung, bei letzter Kammer
- △10 SLOT FOR SIDE KEYING, ON CAVITY NO. 1  
Schlitz fuer Seitenkodierung, bei Kammer Nr. 1
- △1 - △9 SEE SHEET 1  
Siehe Blatt 1

LOC	DIST	REV	DATE	APVD
A1	-	-	-	-

REVISIONS				
NO.	DESCRIPTION	DATE	BY	APPROVED
-	SEE SHEET 1	-	-	-

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: H. Alzmann 27.10.2005	TE Connectivity NAME: AMP DUOPLUG 2.5 MKII FEMALE CONNECTOR 3-20 POSITION (WITH PCB LOCKING) SIZE: A1 CAGE CODE: 00779 DRAWING NO: C=1740501 RESTRICTED TO: -
DIMENSIONS: mm		CHK: B. Schnaubel 27.10.2005	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: T. Klenner 27.10.2005	
0 PLC ±0.2 1 PLC ±0.2 2 PLC ±0.2 3 PLC ±0.2 4 PLC ± ANGLES ±° FINISH ±*		PRODUCT SPEC: 108-18785 APPLICATION SPEC: 116-18467 WEIGHT: - CUSTOMER DRAWING: -	
MATERIAL: -		SCALE: 5:1	SHEET: 2 OF 2