

QPD C 3PE2,5 2X6-10 BK

Order No.: 1582211



QUICKON cable connector, black, 3+PE-pos., 1.0 mm² ... 2.5 mm² / 690 V / 20 A, for a cable diameter of 6 mm ... 10 mm.

Commercial data

EAN	4046356316941
Pack	1
Customs tariff	85366990
Weight/Piece	64.60 g
Country of Origin	DE
Catalog page information	Page 49 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
18/09/2007



Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**General characteristics**

Design	QPD 4x2,5
Color	black
Locking type	Screw locking
Connection method	QUICKON connection
Type of connection	IDC connection

Number of positions	4
Note number of positions	3+PE
Wrench size, union nut	22 mm
Tightening torque, union nut	5 Nm
Conductor cross section stranded min.	1.5 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section solid min.	1 mm ²
Conductor cross section solid max.	1.5 mm ²
Conductor cross section AWG/kcmil min.	16
Conductor cross section AWG/kcmil max	14

Conductor data

Structure of individual litz in acc. with VDE 0295 / smallest wire diameter	VDE 0295 class 1 to 6 / min. 0.15 mm
Wire insulation material	PVC / PE
Wire diameter including insulation	2.5 mm ... 3.8 mm
External cable diameter	6 mm ... 10 mm

Environmental conditions

Degree of protection	IP68, 24 h / 2 m
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Temperature when conductor connected	-5 °C ... 50 °C

Electrical characteristics

Nominal current I_N	20 A
Rated current	20 A
Rated voltage (III/3)	630 V
Rated voltage (III/2)	1000 V
Rated voltage (II/2)	1250 V
Rated surge voltage (III/3)	6 kV
Rated surge voltage (III/2)	8 kV
Rated surge voltage (II/2)	8 kV

Mechanical characteristics

QUICKON connectability	max. 10
Insertion/withdrawal cycles	50 (Quickon connections max. 10)

Material data

Contact material	CuZn
Contact surface material	Tin-plated
Contact carrier material	PA
Insulating material	PA
Inflammability class acc. to UL 94	V0
Surge voltage category	III
Pollution degree	3

Certificates

Certification CB, VDE-PZI

Accessories

Item	Designation	Description
------	-------------	-------------

General

0806932	GPE 13X 9 WH	Plastic label sheet, self-adhesive double layer plastic labels, square corners, material thickness: 0.8 mm, suitable for plotting and engraving, color: white
1582202	QPD P 3PE2,5 6-10 BK	QUICKON connector, black, 3+PE-pos., 1.0 mm ² ... 2.5 mm ² / 690 V / 16 A, with QUICKON nut, for lines with a diameter of 6 mm ... 10 mm.
1582205	QPD P 3PE2,5 9-14 BK	QUICKON connector, black, 3+PE-pos., 1.0 mm ² ... 2.5 mm ² / 690 V / 16 A, with QUICKON nut, for lines with a diameter of 9 mm ... 14 mm.

Plug/Adapter

1582459	CP-QPD	Keying profile red, for pushing into the QUICKON dome and connector, can be positioned in 90° steps.
---------	--------	--

Protection and sealing elements


1400284	SEALING PLUG 10X16 RD	Closing cap, for closing unused bore holes in multiple seals and cable glands, diameter 10 mm
1400284	SEALING PLUG 10X16 RD	Closing cap, for closing unused bore holes in multiple seals and cable glands, diameter 10 mm

Tools


1670206	QSS 22	Allen wrench, for loosening and fastening the QUICKON union nut, WAF 22 mm
---------	--------	--

Drawings


Diagram

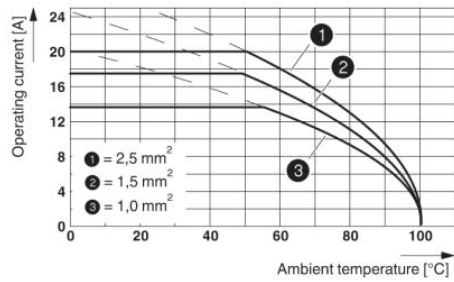

Dimensioned drawing

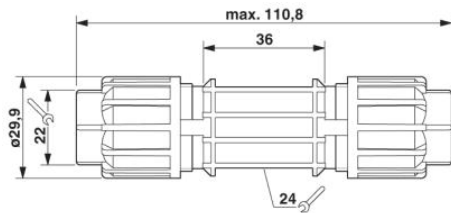

Schematic diagram

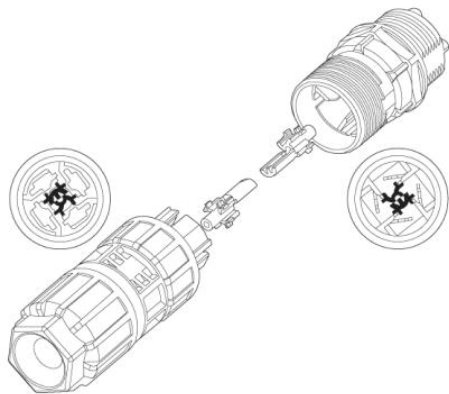

Encoding of the QUICKON connector

Address

PHOENIX CONTACT Ltd
Halesfield 13
Telford / Shropshire / TF7 4PG,England
Phone 01952 681 700
Fax 01952 681 799
<http://www.phoenixcontact.co.uk>



Phoenix Contact Ltd.
Technical modifications reserved;
