

6

5



4

3

2

1


MATERIAL NUMBER	ENGINEERING NUMBER	LENGTH
130039-0230	DNDC302A-M005	0.5M +44.5mm -0 [1.64FT +1.75IN -0]
130039-0330	DNDC302A-M010	1.0M +55.6mm -0 [3.28FT +2.19IN -0]

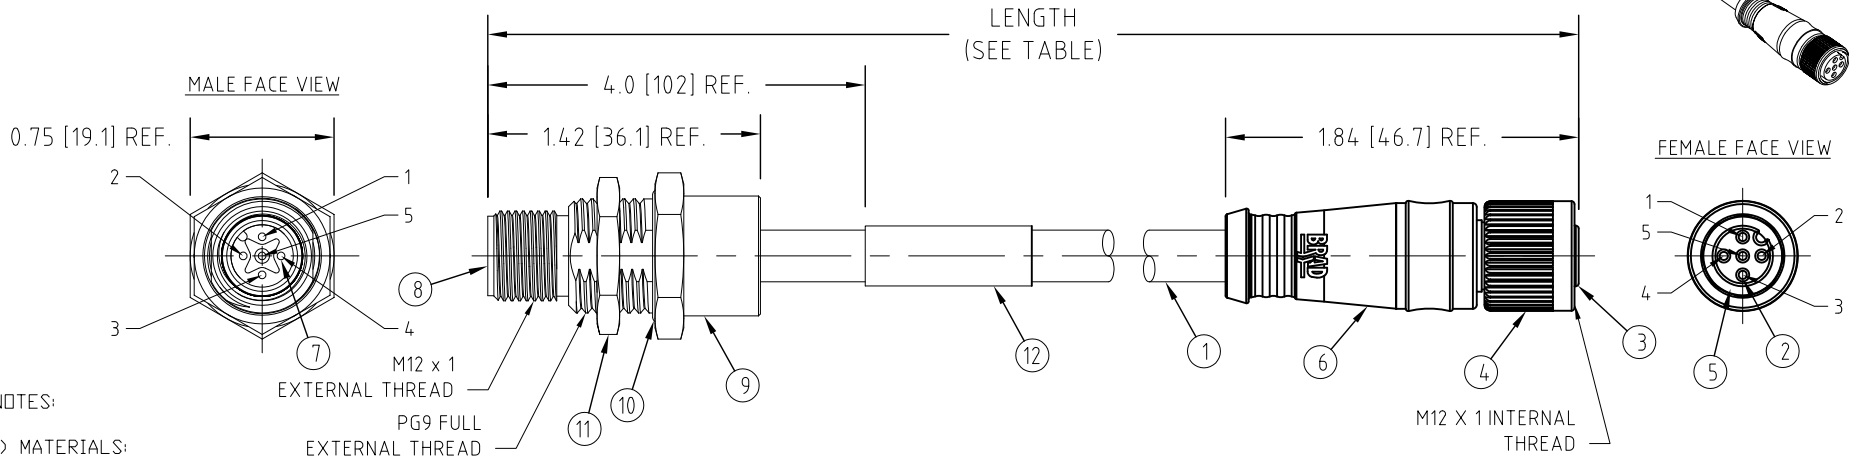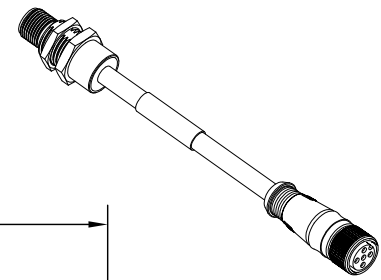

- NOTES:
- 1) MATERIALS: SEE TABLE
  - 2) FINISHES: SEE TABLE
  - 3) ELECTRICAL DATA:  
MAX. VOLTAGE: 250 VAC/VDC  
MAX. CURRENT: 4 AMPS
  - 4) ENVIRONMENTAL:  
PROTECTION IP67  
TEMPERATURE RANGE: -20°C TO 80°C
  - 5) CERTIFICATIONS:  
cCSAus FILE: LR6837
  - 6) ASSEMBLY IS RoHS COMPLIANT.

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
12	1	LABEL	PLASTIC FILM	YELLOW
11	1	PANEL NUT	BRASS	NICKEL PLATED
10	1	PANEL O-RING	NITRILE	BLACK
9	1	MALE RECEPTACLE SHELL	BRASS	NICKEL PLATING
8	1	MALE INSERT	NYLON	BLACK
7	5	PIN CONTACT	COPPER ALLOY	GOLD PLATING
6	1	DVERMOLD	PVC	GRAY
5	1	CONNECTOR O-RING	NITRILE	RED
4	1	COUPLER	ZINC DIE-CAST	BLACK E-COAT
3	1	FEMALE INSERT	NYLON	BLACK
2	5	SOCKET CONTACT	COPPER ALLOY	GOLD PLATING
1	1	#22/4 CABLE + DRAIN	PVC JACKET	GRAY

WIRING DIAGRAM

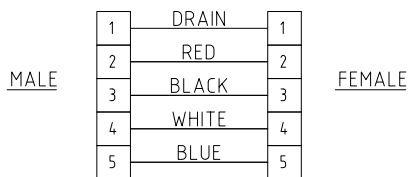

<b>RELEASE SALES DRAWING</b> EC NO: WNA2010-0437 DRWN: LHARTMAN 2010/01/22 CHKD: BWOODMAN APPR: JFMURPHY 2010/01/28	<b>QUALITY SYMBOLS</b> $\nabla=0$ $\nabla C=0$	<b>GENERAL TOLERANCES (UNLESS SPECIFIED)</b>		<b>DIMENSION STYLE</b> IN/MM		SCALE 1:1	DESIGN UNITS INCH	<b>THIRD ANGLE PROJECTION</b>
		4 PLACES ±--- ±---	mm INCH	DRAWN BY DATE <b>LHARTMAN 2010/01/22</b>		TITLE <b>MIC CORDSET TO RCPT          5P FE ST TO MA BPM          #22/4 + DRAIN PVC CABLE</b>		
		3 PLACES ±--- ±0.05	2 PLACES ±0.13 ±0.10	CHECKED BY DATE <b>BWOODMAN 2010/01/27</b>		<b>MOLEX INCORPORATED</b>		
		1 PLACE ±0.25 ±0.020	ANGULAR ±1/2°		APPROVED BY DATE ---		DOCUMENT NO. <b>SD-130039-028</b>	
<b>DRAFT WHERE APPLICABLE          MUST REMAIN          WITHIN DIMENSIONS</b>		MATERIAL NO. <b>SEE TABLE</b>		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

6

5

4

3

2

1