


SACC-DSIV-M12FS-4CON-L180-SI

Order No.: 1528154

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1528154>Sensor/Actuator flush-type socket, 4-pos., M12, A-coded, rear/screw
mounting with Pg9 thread, with straight solder connection**Commercial data**

GTIN (EAN)	
sales group	D125
Pack	10 pcs.
Customs tariff	85369010
Catalog page information	Page 75 (PC-2005)

Product notesWEEE/RoHS-compliant since:
12/20/2005

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**General data**

Rated current at 40°C	4 A
Rated voltage	250 V
Number of positions	4
Volume resistance	≤ 0.003 Ω

Insulation resistance	$\geq 100000 \Omega$
-----------------------	----------------------


General characteristics

Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP67
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PBT
Material, knurls	Nickel-plated brass
Sealing material	NBR
Connection method	Solder pins
Status display	No

Diagrams/Drawings

Schematic diagram

Pin assignment M12 socket, 4-pos., A-coded, view female side

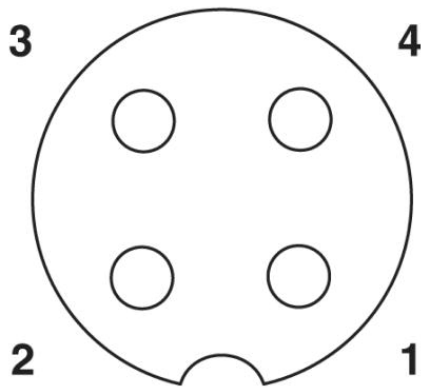

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;