

# MC 1,5/10-LWL 4-3,5

Order No.: 1841200



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1841200>

Fiber optics, Pitch: 3.5 mm, Number of positions: 10, Dimension a: 4 mm, Color: transparent

Commercial data	
GTIN (EAN)	4017918111847
Note	Made-to-order
sales group	E190
Pack	50 pcs.
Customs tariff	85366990
Weight/Piece	0.00374 KG
Catalog page information	Page 192 (CC-2009)

### Product notes

WEEE/RoHS-compliant since: 01/01/2003



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Accessories

Item	Designation	Description
<b>General</b>		
1844210	MC 1,5/ 2-G-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1843790	MC 1,5/ 2-GF-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering


---

1844223	MC 1,5/ 3-G-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1843800	MC 1,5/ 3-GF-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1844236	MC 1,5/ 4-G-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1843813	MC 1,5/ 4-GF-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1844249	MC 1,5/ 5-G-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1843826	MC 1,5/ 5-GF-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1844252	MC 1,5/ 6-G-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1843839	MC 1,5/ 6-GF-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1844265	MC 1,5/ 7-G-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1843842	MC 1,5/ 7-GF-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1844278	MC 1,5/ 8-G-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1843855	MC 1,5/ 8-GF-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1844281	MC 1,5/ 9-G-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1843868	MC 1,5/ 9-GF-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1844294	MC 1,5/10-G-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1843871	MC 1,5/10-GF-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1844304	MC 1,5/11-G-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1843884	MC 1,5/11-GF-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1844317	MC 1,5/12-G-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1843897	MC 1,5/12-GF-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1844320	MC 1,5/13-G-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1843907	MC 1,5/13-GF-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering

1844333	MC 1,5/14-G-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1843910	MC 1,5/14-GF-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1844346	MC 1,5/15-G-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1843923	MC 1,5/15-GF-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1844359	MC 1,5/16-G-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1843936	MC 1,5/16-GF-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1844362	MC 1,5/17-G-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1843949	MC 1,5/17-GF-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1844375	MC 1,5/18-G-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1843952	MC 1,5/18-GF-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1844388	MC 1,5/19-G-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1843965	MC 1,5/19-GF-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1844391	MC 1,5/20-G-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering
1843978	MC 1,5/20-GF-3,5	Header, Nominal current: 8 A, Rated voltage (III/2): 160 V, Pitch: 3.5 mm, Color: green, Metal surface: Sn, Assembly: Soldering

## Diagrams/Drawings

### Dimensioned drawing

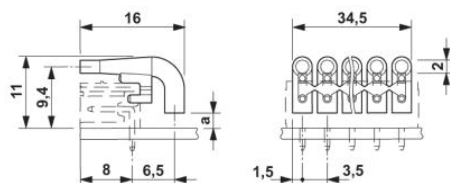

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;