

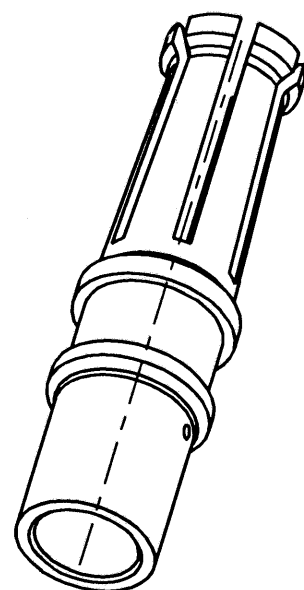


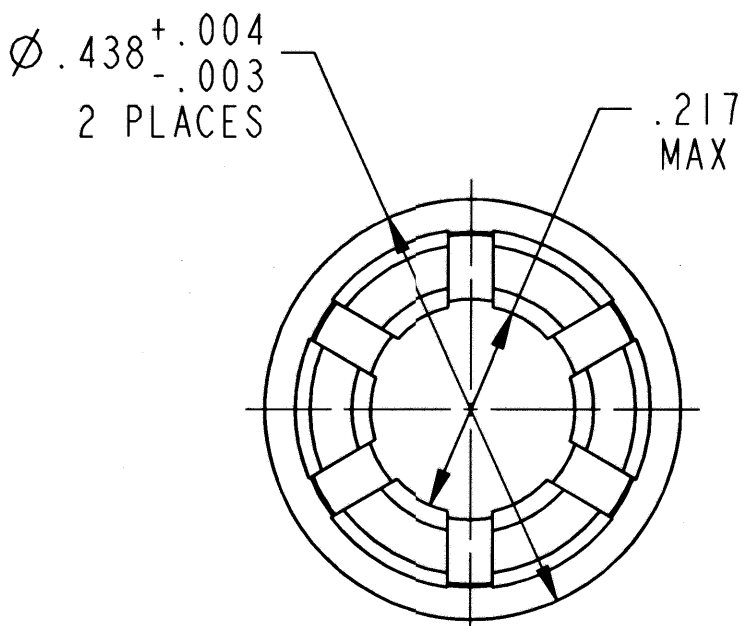

REVISIONS			
LTR	DESCRIPTION	DATE	APPVD
C	(CL 11) SEE CHANGE NOTICE ECN: 88492	11-20-00 PRESCOTT	<i>phw</i>

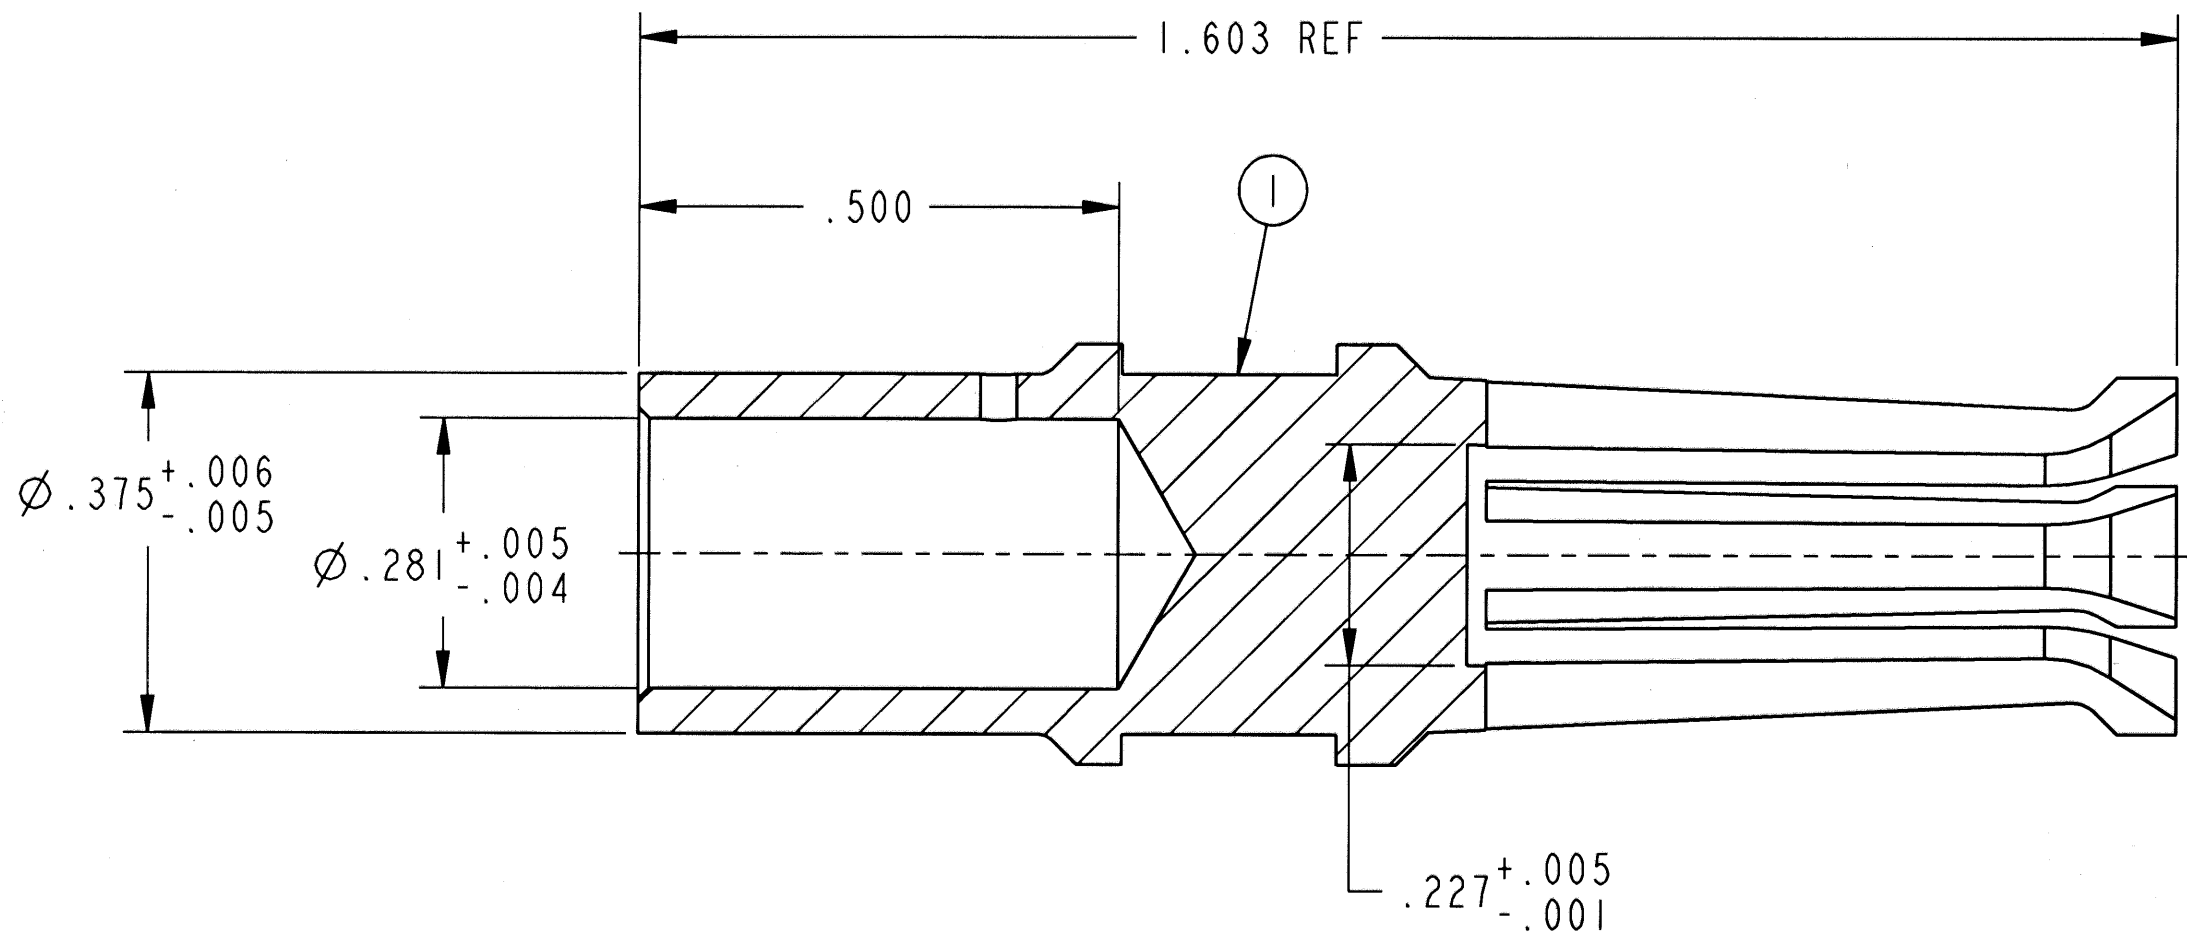

4. MEAN SURFACE AREA 3.1937 SQ IN.
3. SILVER PLATE .0002-.0004 THICK PER 9-1882.
PROTECTIVE TREAT PER 9-3264.
2. ALL DIMENSIONS ARE AFTER PLATING.
1. A $\varnothing .2260^{+.0002}_{-.0000}$ HARDENED STEEL PIN
MUST ENGAGE SOCKET WITH A FORCE NOT GREATER
THAN 11 LBS. FOLLOWING THIS A $\varnothing .2240^{+.0000}_{-.0002}$
HARDENED STEEL PIN SHALL DISENGAGE SOCKET
WITH A FORCE NOT LESS THAN 20 OZ. DEPTH OF
ENGAGEMENT SHALL BE .594 MIN. FROM FRONT
OF CONTACT. PINS SHALL HAVE A FINISH OF $\sqrt{3}$
AND A SPHERICAL TIP.

NOTES:

THE USE OF THIS DOCUMENT IS UNLIMITED.
HOWEVER, DOCUMENTS REFERENCED HEREON
MAY CONTAIN LIMITED RIGHTS DATA.

COMPANY ID: 9
INTERNAL: N
DATE CODE: N

COD/MS/CUST: N
LOT NO: N
SEE DRAW: N

N/A
N/A
N/A

STAMPING DATA
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED	SPECIFICATIONS
LINEAR DIMENSIONS ARE IN INCHES TOLERANCES: .XXXX = $\pm .0005$.XXX = $\pm .010$.XX = $\pm .03$.X = $\pm .1$ ANGLES = $\pm 2^\circ$ OTHER STANDARDS PER 9-3800 AND DOD-D-1000 THIRD ANGLE PROJECTION	MATERIAL SPEC. N/A
	PROCESS SPEC. SEE NOTE 3
	APPROVALS DATE
	PROF/ENG INFORMATION 10-40565.PART 10-40565

I	I	10-40565-B	CONTACT	
POS	QTY	PART NUMBER	DESCRIPTION	NOTE
PARTS LIST				
AMPHENOL CORPORATION AEROSPACE OPERATIONS SIDNEY, N.Y.				
CONTACT, SOCKET, CRIMP SIZE 4 SILVER PLATED				
U				
SCALE: 5.0 REF: 10-101515-4S SHEET 1 OF 1				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)
[10-040565-000](#)