



Pin #	Assignment
1	Top
2	Left
3	Bottom
4	Right

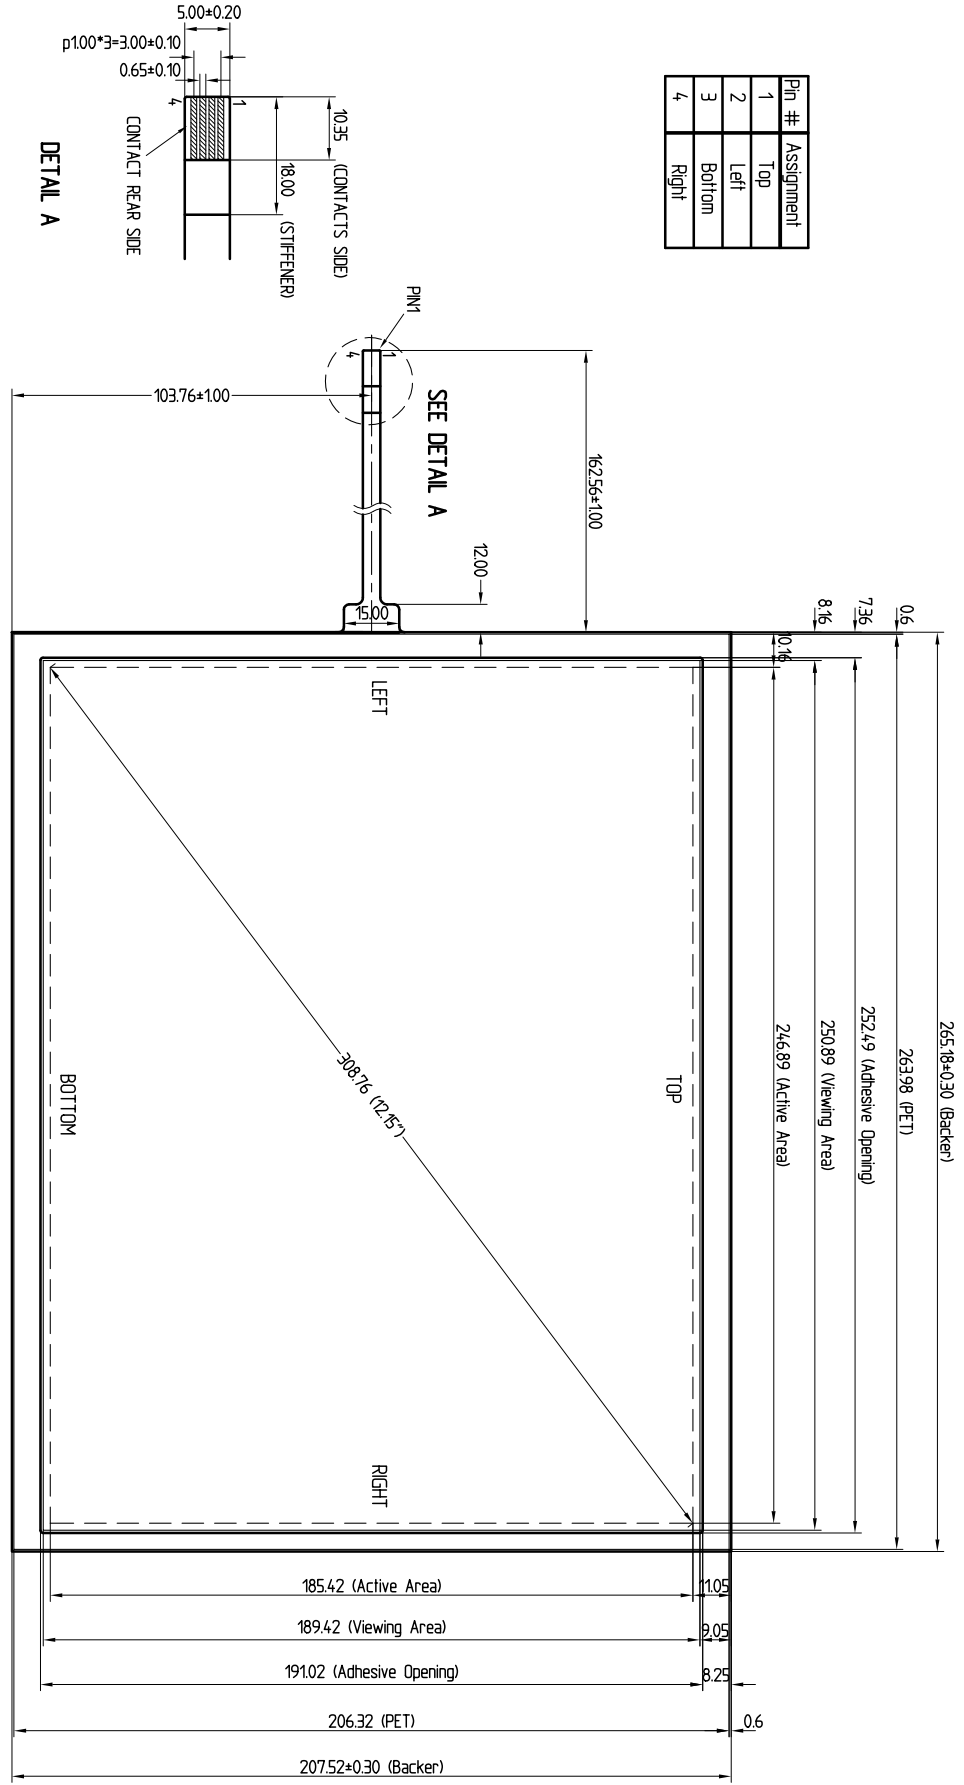

NOTES:

1. ITD GLASS THICKNESS : 1.57mm
2. OVERALL THICKNESS : 187±0.10mm
3. CONNECTOR AND PINOUT AS INDICATED
4. FRONT SURFACE : ANTI-GLARE HARDCOAT
5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.50mm
6. TAIL TYPE : FPC
7. OTHER SPEC : SEE APPROVAL SHEET



REV	MODIFICAT	DATE	NAME	ARTICLE	UNIT	SCALE	PROVIDER	DATE	NAME	ARTICLE	UNIT	SCALE
				2003			PROVIDER	28.01	Hrt			
				APPROVED	28.01	Maurer	TOLERANCES UNLESS SPECIFIED					
				X		±0.5	X = ±0.5					
				XX		±0.5	XX = ±0.5					
				XXX		±0.3	XXX = ±0.3					

REV	MODIFICAT	DATE	NAME	ARTICLE	UNIT	SCALE	PROVIDER	DATE	NAME	ARTICLE	UNIT	SCALE
				2003			PROVIDER	28.01	Hrt			
				APPROVED	28.01	Maurer	TOLERANCES UNLESS SPECIFIED					
				X		±0.5	X = ±0.5					
				XX		±0.5	XX = ±0.5					
				XXX		±0.3	XXX = ±0.3					

SCHURTER				TOUCH 12.1" 4 WIRE			
D-79346 Endingen				SCHURTER-ORDER-NO:			
				1070.0446			
				SHEET 1 OF 1			
				REV -			
				Manufactured by Apex Internal Technology Corp.			