

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0010977105](#)
Status: **Active**
Overview: C-Grid® Products
Description: 2.54mm Pitch C-Grid® Breakaway Header, Dual Row, Vertical, High Temperature, 10 Circuits, Tin (Sn) Plating, 2.79mm PC Tail Length

Documents:
[3D Model](#) [Product Specification PS-70280-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179


General

Product Family PCB Headers
Series [70280](#)
Application Board-to-Board, Signal, Wire-to-Board
Overview [C-Grid® Products](#)
Product Name C-Grid®
UPC 800754835756

Physical

Breakaway Yes
Circuits (Loaded) 10
Circuits (maximum) 10
Color - Resin Black
Durability (mating cycles max) 25
First Mate / Last Break No
Flammability 94V-0
Glow-Wire Compliant No
Guide to Mating Part No
Keying to Mating Part None
Lock to Mating Part None
Material - Metal Copper Alloy
Material - Plating Mating Tin
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Net Weight 0.738/g
Number of Rows 2
Orientation Vertical
PC Tail Length 2.79mm
PCB Locator No
PCB Retention None
PCB Thickness - Recommended 1.60mm
Packaging Type Bag
Pitch - Mating Interface 2.54mm
Plating min - Mating 3.810µm
Plating min - Termination 3.810µm
Polarized to Mating Part No
Polarized to PCB No
Shrouded No
Stackable Yes
Temperature Range - Operating -40°C to +105°C
Termination Interface: Style Through Hole

Electrical

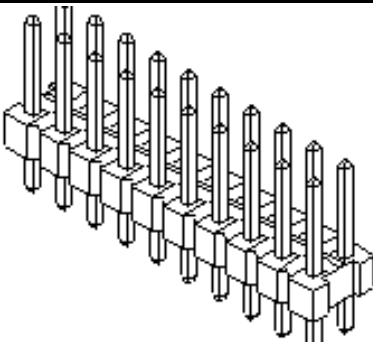

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Not Contained Per
-ED/01/2017 (12
January 2017)

Halogen-Free

Status

Low-Halogen

**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any
non-product compliance questions.

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

[70280 Series](#)

Current - Maximum per Contact	3.0A
Voltage - Maximum	250V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	245
Material Info	
Engineering Number	A-70280-0125
Reference - Drawing Numbers	
Product Specification	PS-70280-001
Sales Drawing	SDA-70280-0001-4000

This document was generated on 02/15/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

10-97-7105