
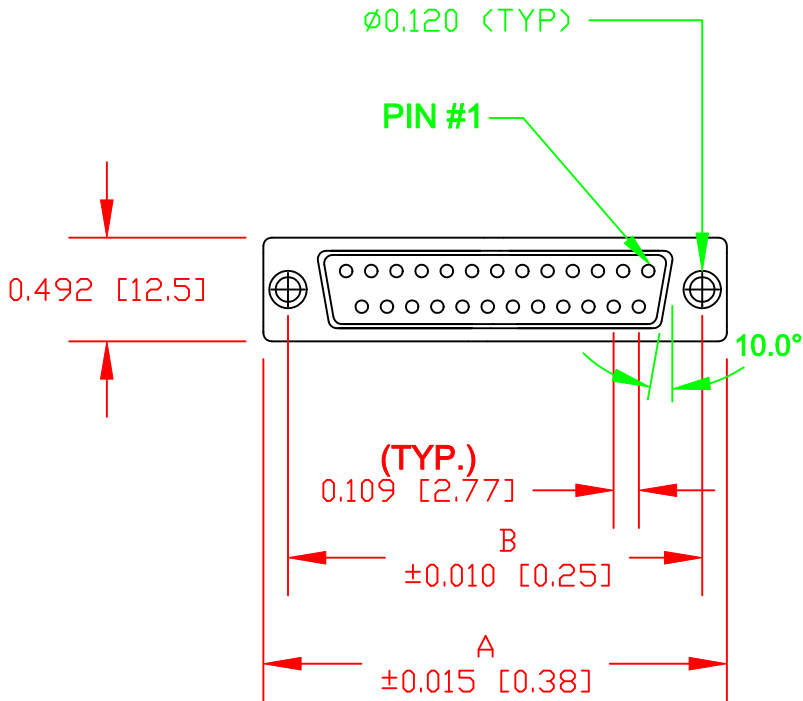



25 POSITION SHOWN FOR REFERENCE

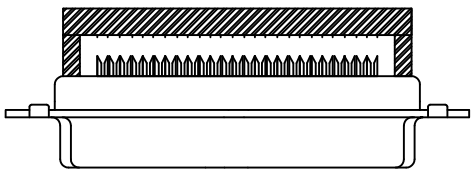


	A	B	C CLOSED	C OPEN
9	1.213 30.81	0.984 25.00	0.610 15.50	0.728 18.50
15	1.541 39.14	1.312 33.33	0.610 15.50	0.728 18.50
25	2.087 53.00	1.852 47.04	0.610 15.50	0.728 18.50
37	2.729 69.32	2.500 63.50	0.610 15.50	0.728 18.50

RoHS COMPLIANT

TERMINATED

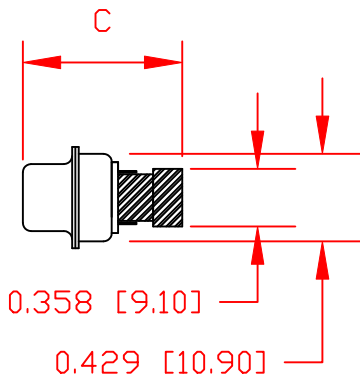

CONNECTOR COMES WITH STRAIN RELIEF BAR



SPECIFICATIONS:

MATERIALS:

- SHELL: STEEL, TIN PLATED
- INSULATOR: UL 94V-0 RATED POLYESTER, GLASFILLED, BLACK
- CONTACTS: COPPER ALLOY

ELECTRICAL:

- CURRENT RATING: 1.5 AMP
- CONTACT RESISTANCE: 10 mOHMS MAX
- INSULTOR RESISTANCE: 5000 MOHMS MIN
- VOLTAGE: 500V AC FOR 1 MINUTE
- TEMPERATURE: -55°C TO +125°C

184AYYY-292LYY1

SERIES _____

POSITIONS _____

009

015

025

037

GENDER _____

1 = MALE

2 = FEMALE

TERMINATION _____

9 = IDC

SHELL PLATING _____

2= TIN

HARDWARE OPTIONS _____

00 = NO HARDWARE

01 = .065 4-40 CLINCH NUT BOARD SIDE


PLATING OPTIONS _____

1 = GOLD FLASH

ACCEPTS: 28 AWG STRANDED .050" CENTER FLAT RIBBON CABLE

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: M. SIGMON		DATE: 04-04-11	
			CHECKED:		DATE:	
	NorComp		SCALE: 1:1	SHEET 1 OF 2		REV 1
		DWG NO. 184AYYY-292LYY1				

CLINCH-NUTS ARE 4-40 INTERNAL THREADS



01X108" (BOARD SIDE) – CN1

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: M. SIGMON		DATE: 04-05-11	
		CHECKED:		DATE:	
NorComp		SCALE:	SHEET 2 OF 2		REV 1
		DWG NO. 184AYYY-292LYY1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NorComp:](#)

[184A009-292L001](#) [184A015-292L001](#) [184A025-292L001](#) [184A037-292L001](#)