


$I_{F(AV)}$ $T_c=100^\circ\text{C}$ 50% Duty Cycle, Half Sine 60 Hz (Amps)	I_{FSM} (Amps $\times 10^3$) 50 Hz 60 Hz		I^2t for Fusing @8.3 ms ($A^2\text{sec} \times 10^4$)	I_{RRM} @ V_{RRM} and $T_{J(Max)}$ (mA)	V_{RRM} Range (Volts)	V_{FM} @ $T_J=25^\circ\text{C}$ I_{FM} V_{FM} (Amps) (Volts)		Chip Size (mm)	Junction Temp. Range ($^\circ\text{C}$)	$R_{\theta JC}$ ($^\circ\text{C/W}$)	$R_{\theta CS}$ Lubricated ($^\circ\text{C/W}$)
160											
$T_c=125^\circ\text{C}$	1.8	2	1.67	12	50-1600	503	1.6	16	-65 to 190	.3	.15
160											
$T_c=125^\circ\text{C}$	1.8	2	1.67	12	50-1600	503	1.6	16	-65 to 190.	.3	.15
170											
$T_c=112^\circ\text{C}$	2.9	3.2	4.2	10.5	100-500	550	1.15	16	-20 to 125	.2	.05
170											
$T_c=112^\circ\text{C}$	2.9	3.2	4.2	10.5	100-500	550	1.15	16	-20 to 125	.2	.05
175											
$T_c=112^\circ\text{C}$	4.6	5	10	30	1400-2000	750	1.75	23	-40 to 150	.2	.06
175											
$T_c=112^\circ\text{C}$	4.6	5	10	30	1400-2000	750	1.75	23	-40 to 150	.2	.06
200											
$T_c=140^\circ\text{C}$	5	5.5	12.5	50	100-1000	800	1.7	23	-65 to 190	.17	.10
200											
$T_c=140^\circ\text{C}$	5	5.5	12.5	50	100-1000	800	1.7	23	-65 to 190	.17	.10
200											
$T_c=140^\circ\text{C}$	5	5.5	12.5	50	100-1200	800	1.7	23	-65 to 190	.17	.10
200											
$T_c=140^\circ\text{C}$	5	5.5	12.5	50	100-1200	800	1.7	23	-65 to 190	.17	.10
200											
$T_c=120^\circ\text{C}$	5	5.5	12.5	50	1400-2000	800	1.7	23	-65 to 190	.17	.10
200											
$T_c=120^\circ\text{C}$	5	5.5	12.5	50	1400-2000	800	1.7	23	-65 to 175	.17	.10
200											
	5	5.5	12.5	50	2200-3000	800	1.7	23	-65 to 150	.17	.10
200											
	5	5.5	12.5	50	2200-3000	800	1.7	23	-65 to 150	.17	.10
220											
	6.4	7	20.4	50	2200-4400	1500	2.15	33	-65 to 150	.12	.04
220											
	6.4	7	20.4	50	2200-4400	1500	2.15	33	-65 to 150	.12	.04
240											
$T_c=113^\circ\text{C}$	4.6	5	100	30	600-1200	750	1.4	33	-40 to 175	.2	.06
240											
$T_c=113^\circ\text{C}$	4.6	5	100	30	600-1200	750	1.4	33	-40 to 175	.2	.06
240											
	4.6	5	100	30	1000-2000	750	1.75	33	-40 to 150	.12	—
250											
	5.9	6.5	5.5	30	100-1400	785	1.3	24	-40 to 200	.18	.10
250											
	5.9	6.5	5.5	30	100-1500	785	1.3	24	-40 to 200	.18	.10
250											
	5.9	6.5	5.5	30	100-1500	785	1.3	24	-40 to 200	.18	.10

* = Reverse Polarity Types Available
 ° = Tentative Specifications
 R = Reverse Polarity

Typical Reverse Recovery Time @ $T_J=25^\circ\text{C}$ I_{FM} dI_R/dt t_{rr} (Amps) (A/ μsec) (μsec)			PACKAGE INFORMATION			
			Max Mounting Force or Torque	STYLE	Outline	TYPE NO.
—	—	—	$\frac{360 \text{ lb-in}}{420 \text{ kg-cm}}$	$\frac{3}{4}$ -16 Stud	DO-9	1N3260-3276
—	—	—	$\frac{360 \text{ lb-in}}{420 \text{ kg-cm}}$	$\frac{3}{4}$ -16 Stud	DO-9	1N3260R-3276R
—	—	—	$\frac{50 \text{ lb-in}}{60 \text{ kg-cm}}$	Flat Base	64 x 64 mm	$^\circ\text{SR170L-R}$
—	—	—	$\frac{50 \text{ lb-in}}{60 \text{ kg-cm}}$	Flat Base	64 x 64 mm	$^\circ\text{SR170L-S}$
—	—	—	$\frac{300 \text{ lb-in}}{360 \text{ kg-cm}}$	M20 x 1.5	Metric	$^\circ\text{SR200DM-R}$
—	—	—	$\frac{300 \text{ lb-in}}{360 \text{ kg-cm}}$	M20 x 1.5	Metric	$^\circ\text{SR200DM-S}$
785	25	9	$\frac{360 \text{ lb-in}}{420 \text{ kg-cm}}$	$\frac{3}{4}$ -16 Stud	DO-9	R610__ 20
785	25	9	$\frac{360 \text{ lb-in}}{420 \text{ kg-cm}}$	$\frac{3}{4}$ -16 Stud	DO-9	R611__ 20 ^R
785	25	9	$\frac{360 \text{ lb-in}}{420 \text{ kg-cm}}$	$\frac{3}{4}$ -16 Stud	DO-9	R600__ 20
785	25	9	$\frac{360 \text{ lb-in}}{420 \text{ kg-cm}}$	$\frac{3}{4}$ -16 Stud	DO-9	R601__ 20 ^R
785	25	11	$\frac{360 \text{ lb-in}}{420 \text{ kg-cm}}$	$\frac{3}{4}$ -16 Stud	DO-9	R600__ 20
785	25	11	$\frac{360 \text{ lb-in}}{420 \text{ kg-cm}}$	$\frac{3}{4}$ -16 Stud	DO-9	R601__ 20 ^R
785	25	13	$\frac{360 \text{ lb-in}}{420 \text{ kg-cm}}$	$\frac{3}{4}$ -16 Stud	DO-9	R600__ 20
785	25	13	$\frac{360 \text{ lb-in}}{420 \text{ kg-cm}}$	$\frac{3}{4}$ -16 Stud	DO-9	R601__ 20 ^R
1500	25	15	$\frac{360 \text{ lb-in}}{420 \text{ kg-cm}}$	$\frac{3}{4}$ -16 Stud	R70	R700__ 03
1500	25	15	$\frac{360 \text{ lb-in}}{420 \text{ kg-cm}}$	$\frac{3}{4}$ -16 Stud	R70	R701__ 03 ^R
—	—	—	$\frac{300 \text{ lb-in}}{360 \text{ kg-cm}}$	M20 x 1.5	Metric	$^\circ\text{SR200DL-R}$
—	—	—	$\frac{300 \text{ lb-in}}{360 \text{ kg-cm}}$	M20 x 1.5	Metric	$^\circ\text{SR200DL-S}$
—	—	—	$\frac{1760 \text{ lbs.}}{7.8 \text{ KN}}$	Press Pak	14.5 x 43 mm	$^\circ\text{FD250DM}$
—	—	—	$\frac{325 \text{ lb-in}}{380 \text{ kg-cm}}$	$\frac{3}{4}$ -16 Stud	DO-9	*1N3735-3744
—	—	—	$\frac{325 \text{ lb-in}}{380 \text{ kg-cm}}$	$\frac{3}{4}$ -16 Stud	DO-9	A190
—	—	—	$\frac{325 \text{ lb-in}}{380 \text{ kg-cm}}$	$\frac{3}{4}$ -16 Stud	DO-9	A190R

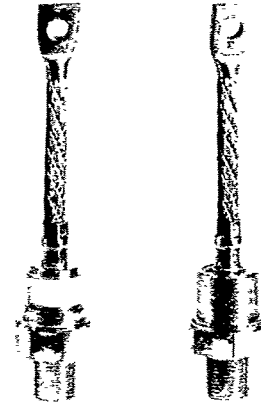

JEDEC DO-9



JEDEC DO-15/DO-27