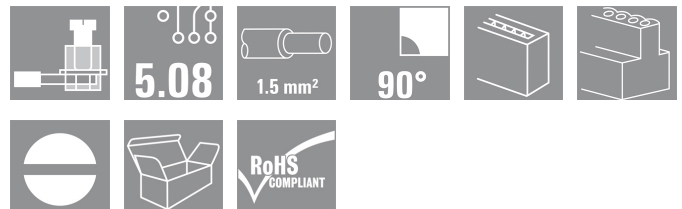


OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Do not use product for new
developments



Female plugs with clamping-yoke screw connection.
 The female plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 12 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 15 A (IEC) / 10 A (UL)

General ordering data

Order No.	1553060000
Type	BLZ 5.08/05/90 SN OR BX
Version	PCB plug-in connector, female plug, 5.08 mm, No. of poles: 5, 90°, Clamping yoke connection, Clamping range, rated connection, max.: 3.31 mm ² , Box
GTIN (EAN)	4008190081331
Qty.	72 pc(s).
Product data	IEC: 400 V / 15 A / 0.2 - 2.5 mm ² UL: 300 V / 10 A / AWG 26 - AWG 12
Packaging	Box

Creation date June 4, 2013 5:21:09 PM CEST

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Dimensions and weights**

Net weight	9.847 g
------------	---------

System parameters

Product family	OMNIMATE Signal - series BL/SL 5.08	Wire connection method	Clamping yoke connection
Conductor outlet direction	90°	Pitch in mm (P)	5.08 mm
Pitch in inches (P)	0.2 inch	No. of poles	5
Number of rows	1	Screwdriver blade	0.6 x 3.5
Screwdriver blade standard	DIN 5264	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.5 Nm	Clamping screw	M 2.5
Stripping length	7 mm	L1 in mm	20.32 mm
L1 in inches	0.8 inch	Touch-safe protection acc. to DIN VDE 57 106	Safe from finger touch

Material data

Insulating material	PBT	Colour	Orange
Colour chart (similar)	RAL 2000	UL 94 flammability rating	V-0
CTI	≥ 200	Contact material	Cu-Leg
Contact surface	tinned	Continuous operating temp., min.	-25 °C
Continuous operating temp., max.	100 °C		

Connectable conductors

Clamping range, rated connection, min.	0.13 mm ²	Clamping range, rated connection, max.	3.31 mm ²
Wire connection cross section AWG, min.	AWG 26	Wire connection cross section AWG, max.	AWG 12
Solid, min. H05(07) V-U	0.2 mm ²	Solid, max. H05(07) V-U	2.5 mm ²
Flexible, min. H05(07) V-K	0.2 mm ²	Flexible, max. H05(07) V-K	2.5 mm ²
w. wire end ferrule, DIN 46228 pt 1, min.	0.2 mm ²	w. wire end ferrule, DIN 46228 pt 1, max.	2.5 mm ²
w. plastic collar ferrule, DIN 46228 pt 4, min.	0.2 mm ²	w. plastic collar ferrule, DIN 46228 pt 4, max.	2.5 mm ²
Plug gauge acc. to EN 60999 a x b; Ø	2.8 mm x 2.0 mm; 2.4 mm		

DIN IEC rating data

Rated current, min. no. of poles (Tu=20°C)	15 A	Rated current, max. no. of poles (Tu=20°C)	12 A
Rated current, number of poles (Tu=40°C), min	12 A	Rated current, number of poles (Tu=40°C), max.	10 A
Rated voltage for surge voltage class / pollution degree II/2	400 V	Rated voltage for surge voltage class / pollution degree III/2	320 V
Rated voltage for surge voltage class / pollution degree III/3	250 V	Rated impulse voltage for surge voltage class/ pollution degree II/2	4 kV
Rated impulse voltage for surge voltage class/ pollution degree III/2	4 kV	Rated impulse voltage for surge voltage class/ contamination degree III/3	4 kV
Short-time withstand current resistance	3 x 1s with 120 A		


Data sheet...

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**


Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

CSA rating data

Institute (CSA)				Rated voltage (Use group B)	
				300 V	
Rated current (use group B)	10 A	Rated voltage (use group D)	300 V		
Rated current (use group D)	10 A	Wire cross-section, AWG, min.	AWG 26		
Wire cross-section, AWG, max.	AWG 12				

UL 1059 rating data

Institute (UR)				Rated voltage (use group B)	
				300 V	
Rated current (use group B)	10 A	Rated voltage (use group D)	300 V		
Rated current (use group D)	10 A	Wire cross-section, AWG, min.	AWG 26		
Wire cross-section, AWG, max.	AWG 12				

Classifications

ETIM 3.0	EC001284	UNSPSC	30-21-18-10
eClass 4.1	27-26-07-01	eClass 5.1	27-26-07-04
eClass 6.2	27-26-07-04	eClass 7.1	27-44-04-02

Notes

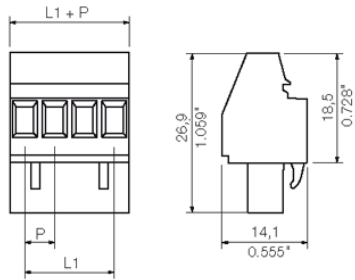
- Notes
- Additional colours on request
 - Gold-plated contact surfaces on request
 - Rated current related to rated cross-section & min. No. of poles.
 - Wire end ferrule without plastic collar to DIN 46228/1
 - Wire end ferrule with plastic collar to DIN 46228/4
 - P on drawing = pitch
 - Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.

Approvals

Approvals		
ROHS	Conform	

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SL-SMT 5.08/90LF Tape


High-temperature-resistant male header, packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1775264001	SL-SMT 5.08/05/90LF 1.5 SN BK RL	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.08 mm, No. of poles: 5, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Tape	4032248167814	350 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Tape

SLZF 5.08/180FI


Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1846540000	SLZF 5.08/05/180FI SN OR BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 5, 180°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4032248362844	50 pc(s).	IEC: 400 V / 23 A / 0.2 - 2.5 mm ² UL: 300 V / 15 A / AWG 26 - AWG 12	Box

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SLDV-THR 5.08/180FLF


High-temperature resistant, double level, laterally offset, male connector with flange or solder flange. 1.5 mm solder pin is suitable for reflow soldering. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 15 A (IEC) / 10 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1829040000	SLDV-THR 5.08/10/180FLF 3.2SN BK BX	PCB plug-in connector, male header, Flange / Solder flange, Reflow solder connection, 5.08 mm, No. of poles: 10, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box	4032248335732	50 pc(s).	IEC: 400 V / 15 A UL: 300 V / 10 A	Box
1829160000	SLDV-THR 5.08/10/180FLF 1.5SN BK BX	PCB plug-in connector, male header, Flange / Solder flange, Reflow solder connection, 5.08 mm, No. of poles: 10, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248335855	50 pc(s).	IEC: 400 V / 15 A UL: 300 V / 10 A	Box

SL-SMT 5.08/90LF Box


High-temperature-resistant male header, packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1775262001	SL-SMT 5.08/05/90LF 1.5SN BK BX	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.08 mm, No. of poles: 5, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248157242	50 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Box
1780440000	SL-SMT 5.08/05/90LF 3.2SN BK BX	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.08 mm, No. of poles: 5,	4032248165766	50 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Box

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

90°, Solder pin length (l):
3.2 mm, tinned, Black, Box

SLDV-THR 5.08/180F


High-temperature resistant, double level, laterally offset, male connector with flange or solder flange. 1.5 mm solder pin is suitable for reflow soldering. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 15 A (IEC) / 10 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1828800000	SLDV-THR 5.08/10/180F 3.2SN BK BX	PCB plug-in connector, male header, Flange, Reflow solder connection, 5.08 mm, No. of poles: 10, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box	4032248335480	50 pc(s).	IEC: 400 V / 15 A UL: 300 V / 10 A	Box
1828920000	SLDV-THR 5.08/10/180F 1.5SN BK BX	PCB plug-in connector, male header, Flange, Reflow solder connection, 5.08 mm, No. of poles: 10, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248335619	50 pc(s).	IEC: 400 V / 15 A UL: 300 V / 10 A	Box

SL-SMT 5.00/90LF Box


High-temperature-resistant male header, packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1797260000	SL-SMT 5.00/05/90LF 1.5SN BK BX	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.00 mm, No. of poles: 5, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248238040	50 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Box
1840380000	SL-SMT 5.00/05/90LF 3.2SN BK BX	PCB plug-in connector, male header, Solder flange, Reflow solder connection,	4032248351220	50 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Box

Creation date June 4, 2013 5:21:09 PM CEST

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

5.00 mm, No. of poles: 5,
90°, Solder pin length (l):
3.2 mm, tinned, Black, Box


SLS 5.08/180F


Male plugs with clamping-yoke screw wire-connect system. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 12 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 21.5 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1846390000	SLS 5.08/05/180F SN OR BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 5, 180°, Clamping yoke connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4032248362097	50 pc(s).	IEC: 400 V / 21.5 A / 0.2 - 2.5 mm ² UL: 300 V / 14 A / AWG 26 - AWG 12	Box

SLS 5.08/180B


Male plugs with clamping-yoke screw wire-connect system. The male plugs provide space for labelling and can be coded.


- 0.2 - 2.5 mm² (IEC) / 26 - 12 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 21.5 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1627270000	SLS 5.08/05/180B SN OR BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 5, 180°, Clamping yoke connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4008190199784	50 pc(s).	IEC: 400 V / 21.5 A / 0.2 - 2.5 mm ² UL: 300 V / 14 A / AWG 26 - AWG 12	Box

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SL 5.08/90B


Male connectors with 90° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1510660000	SL 5.08/05/90B 3.2SN OR BX	PCB plug-in connector, male header, Dovetails for fixing blocks, Solder connection, 5.08 mm, No. of poles: 5, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190121372	50 pc(s).	IEC: 400 V / 18 A UL: 300 V / 15 A	Box

SLZF 5.08/180B


Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1710240000	SLZF 5.08/05/180B SN OR BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 5, 180°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4008190319557	50 pc(s).	IEC: 400 V / 23 A / 0.2 - 2.5 mm ² UL: 300 V / 15 A / AWG 26 - AWG 12	Box

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SL-SMT 5.08/180LF Box


High-temperature-resistant male header, packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1776392001	SL-SMT 5.08/05/180LF 1.5SN BK BX	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.08 mm, No. of poles: 5, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248159178	50 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Box
1838470000	SL-SMT 5.08/05/180LF 3.2SN BK BX	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.08 mm, No. of poles: 5, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box	4032248348534	50 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Box

SLZF 5.08/180F


Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1846970000	SLZF 5.08/05/180F SN OR BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 5, 180°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4032248363131	50 pc(s).	IEC: 400 V / 23 A / 0.2 - 2.5 mm ² UL: 300 V / 15 A / AWG 26 - AWG 12	Box

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SL-SMT 5.08/90F Box


High-temperature-resistant male header, packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1837660000	SL-SMT 5.08/05/90F 3.2SN BK BX	PCB plug-in connector, male header, Flange, Reflow solder connection, 5.08 mm, No. of poles: 5, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Box	4032248347476	50 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Box

SL-SMT 5.08/180F Box


High-temperature-resistant male header, packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1820770000	SL-SMT 5.08/05/180F 3.2SN BK BX	PCB plug-in connector, male header, Flange, Reflow solder connection, 5.08 mm, No. of poles: 5, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box	4032248317639	50 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Box
1837330000	SL-SMT 5.08/05/180F 1.5SN BK BX	PCB plug-in connector, male header, Flange, Reflow solder connection, 5.08 mm, No. of poles: 5, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248345922	50 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Box

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SLZF 5.08/270B


Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1706170000	SLZF 5.08/05/270B SN OR BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 5, 270°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4032248198030	50 pc(s).	IEC: 400 V / 20.5 A / 0.2 - 2.5 mm ² UL: 300 V / 15 A / AWG 26 - AWG 12	Box

SL 5.08/135B


Male connectors with 135° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 17 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1605560000	SL 5.08/05/135B 3.2SN OR BX	PCB plug-in connector, male header, Dovetails for fixing blocks, Solder connection, 5.08 mm, No. of poles: 5, 135°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190089948	50 pc(s).	IEC: 400 V / 17 A UL: 300 V / 15 A	Box

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SLZF 5.08/90B


Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1673580000	SLZF 5.08/05/90B SN OR BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 5, 90°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4008190435295	50 pc(s).	IEC: 400 V / 20.5 A / 0.2 - 2.5 mm ² UL: 300 V / 15 A / AWG 26 - AWG 12	Box

SL-SMT 5.08/180LF Tape


High-temperature-resistant male header, packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1776394001	SL-SMT 5.08/05/180LF 1.5 SN BK RL	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.08 mm, No. of poles: 5, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Tape	4032248163618	250 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Tape

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SL-SMT 5.00/90LF Tape


High-temperature-resistant male header, packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1797780000	SL-SMT 5.00/05/90LF 1.5SN BK RL	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.00 mm, No. of poles: 5, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Tape	4032248239788	350 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Tape

SLT 5.08B


Male plugs with screw TOP wire connection. The male plug provides space for labelling and can be coded.


- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 16 A (IEC) / 10 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1611740000	SLT 5.08/05/180B SN OR BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 5, 180°, TOP connection, Clamping range, rated connection, max.: 2.5 mm ² , Box	4008190192624	50 pc(s).	IEC: 400 V / 16 A / 0.2 - 2.5 mm ² UL: 300 V / 15 A / AWG 26 - AWG 14	Box

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SL 5.00/90B


Male connectors with 90° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1580890000	SL 5.00/05/90B 3.2SN OR BX	PCB plug-in connector, male header, Dovetails for fixing blocks, Solder connection, 5.00 mm, No. of poles: 5, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190042578	50 pc(s).	IEC: 400 V / 18 A UL: 300 V / 15 A	Box

SL 5.08/180B


Male connectors with straight outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.


- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1519860000	SL 5.08/05/180B 3.2SN OR BX	PCB plug-in connector, male header, Dovetails for fixing blocks, Solder connection, 5.08 mm, No. of poles: 5, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190014094	50 pc(s).	IEC: 400 V / 18 A UL: 300 V / 15 A	Box

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SLS 5.08/180FI


Male plugs with clamping-yoke screw wire-connect system. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 12 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 21.5 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1846240000	SLS 5.08/05/180FI SN OR BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 5, 180°, Clamping yoke connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4032248362523	50 pc(s).	IEC: 400 V / 21.5 A / 0.2 - 2.5 mm ² UL: 300 V / 14 A / AWG 26 - AWG 12	Box

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)
SL-SMT 5.08/180 Box


High-temperature-resistant, straight, open ended male header. Packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1775632001	SL-SMT 5.08/05/180 1.5SN BK BX	PCB plug-in connector, male header, open side, Reflow solder connection, 5.08 mm, No. of poles: 5, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248157570	50 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Box
1838010000	SL-SMT 5.08/05/180 3.2SN BK BX	PCB plug-in connector, male header, open side, Reflow solder connection, 5.08 mm, No. of poles: 5, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box	4032248348077	50 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Box

SL 5.00/90


Male connectors with 90° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1571160000	SL 5.00/05/90 3.2SN OR BX	PCB plug-in connector, male header, open side, Solder connection, 5.00 mm, No. of poles: 5, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190128463	50 pc(s).	IEC: 400 V / 18 A UL: 300 V / 15 A	Box
1626020000	SL 5.00/05/90 4.5SN BK BX	PCB plug-in connector, male header, open side, Solder connection, 5.00 mm, No. of poles: 5, 90°, Solder pin	4008190197322	50 pc(s).	IEC: 400 V / 18 A UL: 300 V / 15 A	Box

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Mating connector (fully pluggable)

length (l): 4.5 mm, tinned,
 Black, Box


SLD 5.08/90G


2-tier male header with parallel pin arrangement. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 11 A (IEC) / 10 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1601820000	SLD 5.08/10/90G 3.2SN OR BX	PCB plug-in connector, male header, closed side, Solder connection, 5.08 mm, No. of poles: 10, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190091026	50 pc(s).	IEC: 400 V / 11 A UL: 300 V / 10 A	Box

SLDF 5.08


Male connector for through-panel mounting with optional locking function. Internal connection as flat-blade or solder connection. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 15 A (IEC) / 10 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1635770000	SLDF 5.08 L/F 5 SN BK BX	PCB plug-in connector, male header, 5.08 mm, No. of poles: 5, 180°, Box	4008190264208	50 pc(s).	IEC: 400 V / 15 A UL: 300 V / 10 A	Box
1599160000	SLDF 5.08 L/F 5 SN OR BX	PCB plug-in connector, male header, 5.08 mm, No. of poles: 5, 180°, Box	4008190079970	50 pc(s).	IEC: 400 V / 15 A UL: 300 V / 10 A	Box

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)
SL-SMT 5.08/90G Box


High-temperature-resistant male header, packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1780210000	SL-SMT 5.08/05/90G 3.2SN BK BX	PCB plug-in connector, male header, closed side, Reflow solder connection, 5.08 mm, No. of poles: 5, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Box	4032248165537	50 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Box
1775032001	SL-SMT 5.08/05/90G 1.5SN BK BX	PCB plug-in connector, male header, closed side, Reflow solder connection, 5.08 mm, No. of poles: 5, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248156092	50 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Box

SL-SMT 5.08/180 Tape


High-temperature-resistant, straight, open ended male header. Packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1775634001	SL-SMT 5.08/05/180 1.5 SN BK RL	PCB plug-in connector, male header, open side, Reflow solder connection, 5.08 mm, No. of poles: 5, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Tape	4032248159611	250 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Tape

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)
SL 5.08/135


Male connectors with 135° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 17 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1603090000	SL 5.08/05/135 3.2SN OR BX	PCB plug-in connector, male header, open side, Solder connection, 5.08 mm, No. of poles: 5, 135°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190013912	50 pc(s).	IEC: 400 V / 17 A UL: 300 V / 15 A	Box

SL-SMT 5.08/180G Box


High-temperature-resistant male header, packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1838240000	SL-SMT 5.08/05/180G 3.2SN BK BX	PCB plug-in connector, male header, closed side, Reflow solder connection, 5.08 mm, No. of poles: 5, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box	4032248348305	50 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Box
1775952001	SL-SMT 5.08/05/180G 1.5SN BK BX	PCB plug-in connector, male header, closed side, Reflow solder connection, 5.08 mm, No. of poles: 5, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248158942	50 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Box

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)
SL 5.08/90


Male connectors with 90° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1508360000	SL 5.08/05/90 3.2SN OR BX	PCB plug-in connector, male header, open side, Solder connection, 5.08 mm, No. of poles: 5, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190131241	50 pc(s).	IEC: 400 V / 18 A UL: 300 V / 15 A	Box

SL-SMT 5.08/90G Tape


High-temperature-resistant male header, packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1775034001	SL-SMT 5.08/05/90G 1.5 SN BK RL	PCB plug-in connector, male header, closed side, Reflow solder connection, 5.08 mm, No. of poles: 5, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Tape	4032248167753	350 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Tape

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)
SLD 5.08/180G


2-tier male header with parallel pin arrangement. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 11 A (IEC) / 10 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1602420000	SLD 5.08/10/180G 3.2SN OR BX	PCB plug-in connector, male header, closed side, Solder connection, 5.08 mm, No. of poles: 10, 180°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190077129	50 pc(s).	IEC: 400 V / 11 A UL: 300 V / 10 A	Box

SL-SMT 5.08/90 Box


High-temperature-resistant, 90° angled, open male header Packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1779980000	SL-SMT 5.08/05/90 3.2SN BK BX	PCB plug-in connector, male header, open side, Reflow solder connection, 5.08 mm, No. of poles: 5, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Box	4032248165308	50 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Box
1774792001	SL-SMT 5.08/05/90 1.5SN BK BX	PCB plug-in connector, male header, open side, Reflow solder connection, 5.08 mm, No. of poles: 5, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Box	4032248155828	50 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Box

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)
SL-SMT 5.08/90 Tape


High-temperature-resistant, 90° angled, open male header
Packed in box or tape. In tape with 1.5 mm solder pin
optimised for automatic assembly. 3.2 mm solder pin
suitable for reflow and wave soldering. These male
connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1774794001	SL-SMT 5.08/05/90 1.5 SN BK RL	PCB plug-in connector, male header, open side, Reflow solder connection, 5.08 mm, No. of poles: 5, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Tape	4032248167685	350 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Tape

SL-SMT 5.08/180G Tape


High-temperature-resistant male header, packed in box
or tape. In tape with 1.5 mm solder pin optimised for
automatic assembly. 3.2 mm solder pin suitable for
reflow and wave soldering. These male connectors
provide space for labelling and can be coded.


- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1775954001	SL-SMT 5.08/05/180G 1.5 SN BK RL	PCB plug-in connector, male header, closed side, Reflow solder connection, 5.08 mm, No. of poles: 5, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Tape	4032248160143	250 pc(s).	IEC: 400 V / 19 A UL: 300 V / 15 A	Tape

**OMNIMATE Signal - series BL/SL 5.08
BLZ 5.08/05/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com


Mating connector (fully pluggable)
SL 5.08/180


Male connectors with straight outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1517560000	SL 5.08/05/180 3.2SN OR BX	PCB plug-in connector, male header, open side, Solder connection, 5.08 mm, No. of poles: 5, 180°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	4008190145170	50 pc(s).	IEC: 400 V / 18 A UL: 300 V / 15 A	Box

SLZF 5.08/180


Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	GTIN (EAN)	Qty.	Product data	Packaging
1709400000	SLZF 5.08/05/180 SN OR BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 5, 180°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4008190390167	50 pc(s).	IEC: 400 V / 23 A / 0.2 - 2.5 mm ² UL: 300 V / 15 A / AWG 26 - AWG 12	Box
1709630000	SLZF 5.08/05/180 SN BK BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 5, 180°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	4008190318932	50 pc(s).	IEC: 400 V / 23 A / 0.2 - 2.5 mm ² UL: 300 V / 15 A / AWG 26 - AWG 12	Box