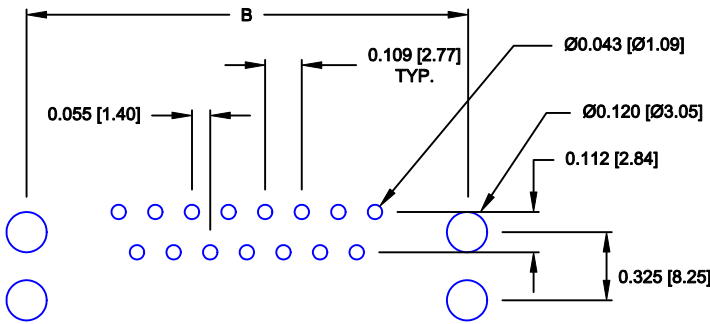
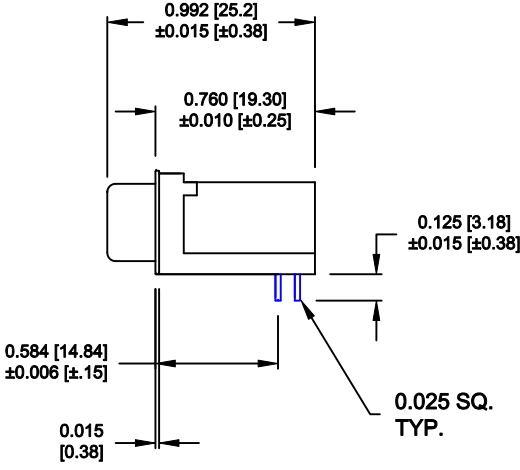
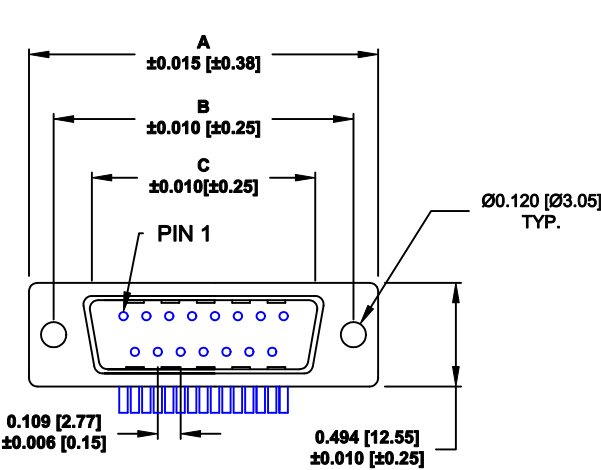




RECOMMENDED PCB LAYOUT
SCALE = 2 : 1

No. OF PINS	DIMENSIONS		
	A	B	C
9	1.213	0.984	0.666
	30.81	24.99	16.92
15	1.541	1.312	0.994
	39.14	33.32	25.25
25	2.088	1.852	1.534
	53.04	47.04	38.96
37	2.729	2.500	2.181
	69.32	63.50	55.42

MATERIALS:

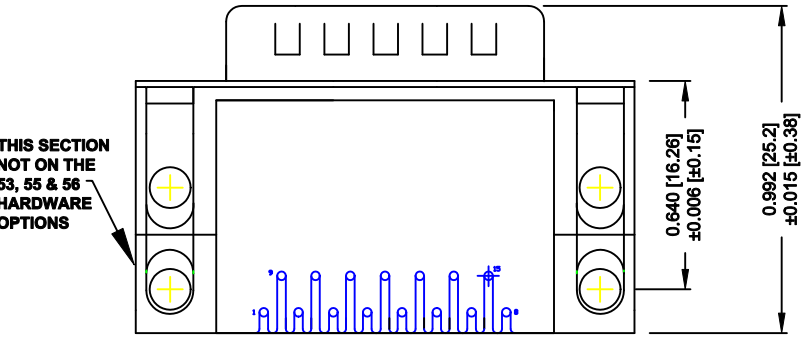
- SHELL: SPCC, NICKEL PLATED
- INSULATOR: BLACK PA9T NYLON, UL 94V-O
- CONTACTS: BRASS, GOLD PLATED
- RIVET: COPPER ALLOY, NICKEL PLATED
- SCREWLOCK: ZINC ALLOY, NICKEL PLATED
- BOARDLOCK: SPCC, TIN PLATED

ELECTRICAL:

- CURRENT RATING: 5 AMPS
- INSULATOR RESISTANCE: 1,000 MEGOHMS Min.
- DIELECTRIC WITHSTANDING: 1,000VAC RMS
- TEMPERATURE: -55° C to +105° C

183-YYY-1 1 3 R YY 1

- SERIES
- POSITIONS
- 009
- 015
- 025
- 037
- GENDER
- 1 = MALE
- TERMINATION
- 1 = DIP SOLDER
- SHELL PLATING
- 3 = NICKEL PLATED
- RoHS COMPLIANT
- HARDWARE OPTIONS
- SEE SHEET 2
- PLATING OPTIONS
- 1 = GOLD FLASH



BOTTOM VIEW

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

DRAWN: PAM JENKINS

CHECKED:

DATE: 4-28-05









DATE:

SCALE: 1 : 1

SHEET 1 OF 2

REV 11

DWG NO. 183-YYY-113RYY1

	 METAL SHELL WITH INSIDE GROUND STRAPS	 METAL SHELL	 METAL SHELL FORK BOARD LOCKS	 METAL SHELL FORK BOARD LOCKS
 0.120" DIA. HOLE	16	N/A	N/A	N/A
 4-40 FLUSH INSERT	17	45	57 BOARD LOCKS IN REAR HOLE (0.590")	53 BOARD LOCKS IN FRONT HOLE (0.590")
 4-40 HEX STANDOFF FEMALE SCREWLOCK	18	48	54 BOARD LOCKS IN REAR HOLE	56 BOARD LOCKS IN FRONT HOLE
 4-40 ROUND STANDOFF FEMALE SCREWLOCK	N/A	N/A	N/A	N/A

DO NOT SCALE FROM DRAWING

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: WAYNE ROBBINS		DATE: 8-23-98	
		CHECKED:		DATE:	
NorComp	SCALE:	SHEET 2		OF 2	REV 11
	DWG NO. 183-YYY-113RYY1				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NorComp:

<u>183-009-113R531</u>	<u>183-009-213R531</u>	<u>183-015-113R531</u>	<u>183-015-213R531</u>	<u>183-009-113R161</u>	<u>183-009-113R171</u>
<u>183-009-113R181</u>	<u>183-015-113R161</u>	<u>183-015-113R171</u>	<u>183-015-113R181</u>	<u>183-025-113R161</u>	<u>183-025-113R171</u>
<u>183-025-113R181</u>	<u>183-037-113R161</u>	<u>183-037-113R171</u>	<u>183-037-113R181</u>	<u>183-037-213R531</u>	<u>183-037-113R531</u>
<u>183-025-213R531</u>	<u>183-025-113R531</u>	<u>183-037-213R561</u>	<u>183-015-113R561</u>	<u>183-009-113R561</u>	<u>183-015-213R561</u>
<u>183-009-213R561</u>	<u>183-037-113R561</u>	<u>183-025-213R561</u>	<u>183-025-113R561</u>	<u>183-009-113R431</u>	<u>183-009-113R451</u>
<u>183-009-113R481</u>	<u>183-009-113R541</u>	<u>183-009-113R571</u>	<u>183-015-113R431</u>	<u>183-015-113R451</u>	<u>183-015-113R481</u>
<u>183-015-113R541</u>	<u>183-015-113R571</u>	<u>183-025-113R431</u>	<u>183-025-113R451</u>	<u>183-025-113R481</u>	<u>183-025-113R541</u>
<u>183-025-113R571</u>	<u>183-037-113R431</u>	<u>183-037-113R451</u>	<u>183-037-113R481</u>	<u>183-037-113R541</u>	<u>183-037-113R571</u>