


COIL: @ 25°C	
RESISTANCE	75 OHMS ±10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	6.5 VDC
MUST RELEASE	0.9 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	50 g's 11 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES: OPERATE & RELEASE 10 MS MAX. CONTACT BOUNCE 5 MS MAX.	

CUSTOMER DATA SHEET

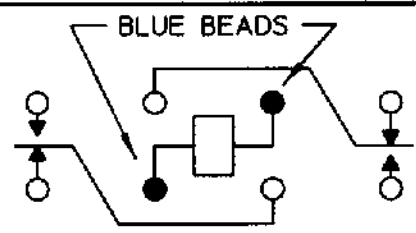

TERMINAL VIEW

CONTACT RATING:	10 AMPS 28 VDC
	RESISTIVE 100,000 OPERATIONS

DR. B.D. 6/16/99 CK.GQH 6-16-99



CUST.	C. I. I. STD
CUST. NO.	REV.

\*07\* RELAY

REVISION  
RB07A112BB1