


Distributed by:

**JAMECO**<sup>®</sup>  
ELECTRONICS

**www.Jameco.com ♦ 1-800-831-4242**

The content and copyrights of the attached  
material are the property of its owner.

Jameco Part Number 748115

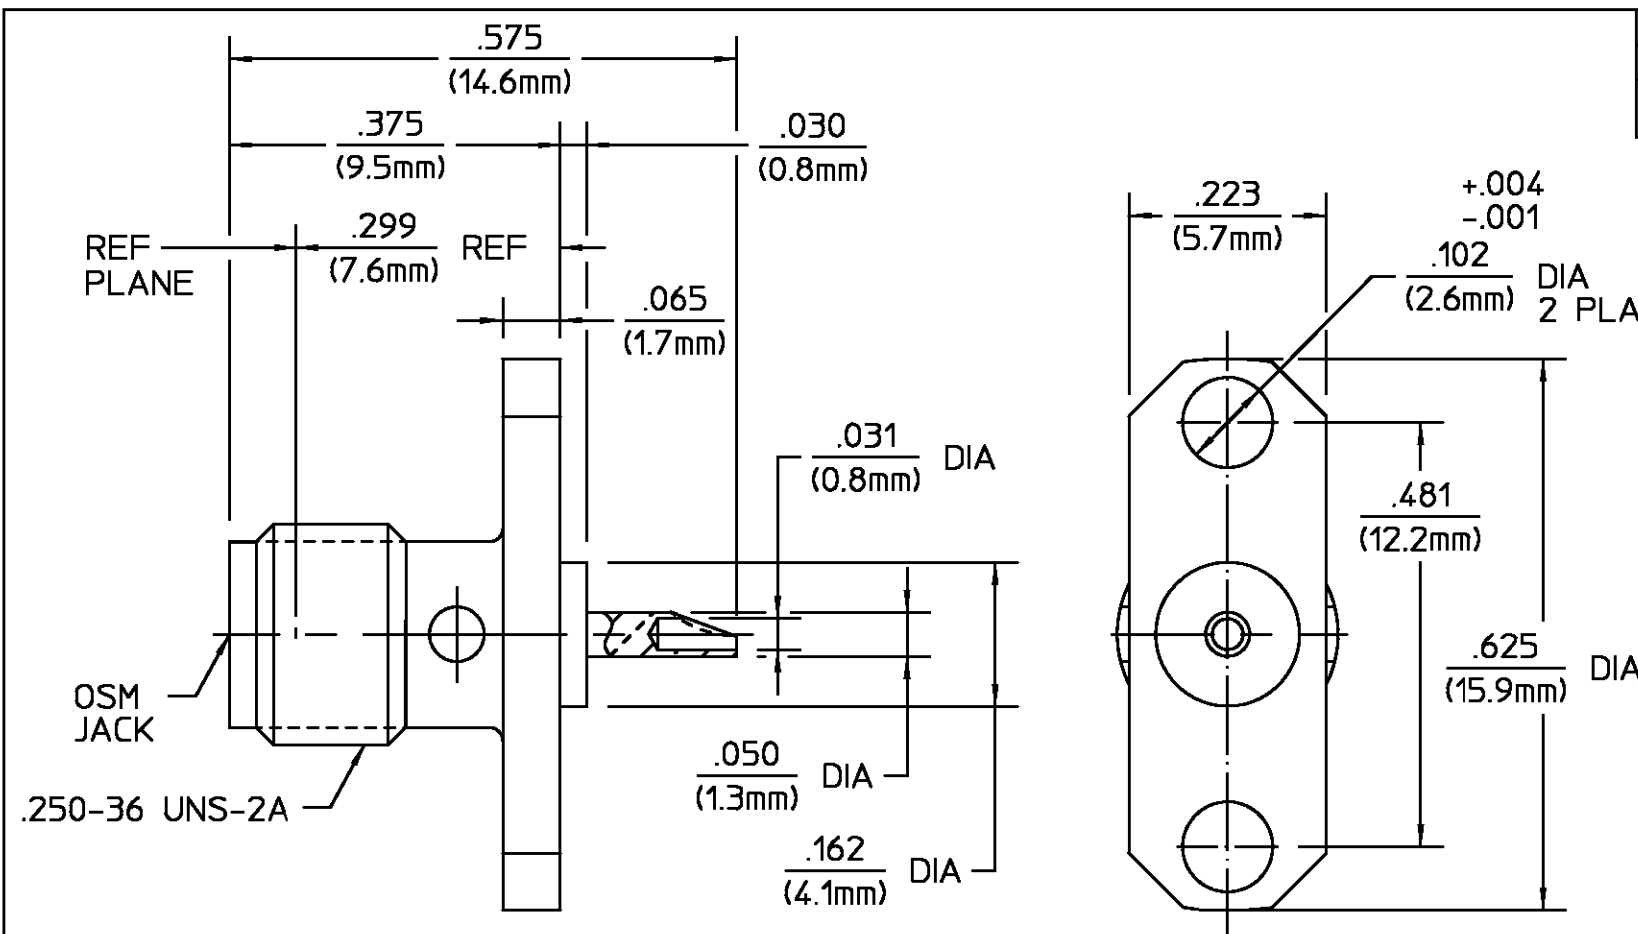

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
010	RELEASED	2/8/93	<i>D. Comello</i>

ELECTRICAL
Nominal Impedance (Ohms) <u>50</u>
Frequency Range (GHz) DC to <u>18</u>
Volt Rating (VRMS MAX)
@ Sea Level <u>335</u>
VSWR <u>N/A</u>
Insertion Loss (dB MAX) <u>N/A</u>
RF Leakage (dB MIN) <u>[-60-f(GHz)]</u>
Corona, 70,000 Ft (VRMS MIN) <u>250</u>
Dielectric Withstanding Voltage
(VRMS MIN) @ Sea Level <u>1,000</u>
Contact Resistance (Milliohms MAX)
Center Contact <u>2.0</u>
Outer Contact <u>2.0</u>
Cable to Housing <u>N/A</u>
RF High Potential @ Sea Level
(VRMS MIN @ 5 MHz) <u>670</u>
LR.(Megohms MIN) <u>10,000</u>

MECHANICAL
Interface Dimensions MIL-STD-348A, Fig. <u>310.2</u>
Recommended Mating
Torque <u>N/A</u>
Mating Characteristics:
Insertion (MAX Lbs) <u>3.0</u>
Withdrawal (MIN Oz) <u>1.0</u>
Force to Engage and
Disengage (In-Lbs MAX) <u>2.0</u>
Center Contact Captivation
Axial (Lbs) <u>6.0</u>
Radial (In-Oz) <u>4.0</u>
Cable Retention
Axial Force (Lbs) <u>N/A</u>
Torque (In-Oz) <u>N/A</u>
Weight (Grams) <u>1.7</u>

ENVIRONMENTAL
Temperature Rating <u>-65°C to +125°C</u>
Vibration MIL-STD-202, Method
204, Condition D.
Shock MIL-STD-202, Method 213,
Condition I.
Thermal Shock MIL-STD-202,
Method 107, Condition A.
Except High Temp shall be +115°C
Moisture Resistance MIL-STD-202,
Method 106
Corrosion - MIL-STD-202, Method
101, Condition B, 5% salt spray

HOUSING
DIELECTRIC
CENTER CONTACT

COMPONENT
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON
FRAC. DEC. ANGLES
± 1/64 ±.005 ± °

These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.

MATERIAL
STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303
PTFE FLUOROCARBON PER ASTM-D-1457
BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H

FINISH
PASSIVATE PER QQ-P-3580
N/A
GOLD PLATE PER MIL-G-45204 OVER COPPER PLATE PER MIL-C-14550

AMP Incorporated  
140 Fourth Avenue  
Waltham, MA 02451-7599

**AMP**

TITLE OSM 2 HOLE FLANGE  
MOUNT JACK RECEPTACLE  
SOLDER POT TERMINAL

SIZE	CODE IDENT NO.	REV
B	26805	010

SCALE 5 : 1 SHEET 1 OF 1