

# Switchcraft®

[Previous Page](#) | [Return to Index](#) | [Next Page](#)



## DIN PLUGS AND RECEPTACLES

- 1. STRAIGHT CORD PLUG with Extended Barrel**
- 2. RIGHT-ANGLE CORD PLUG with 8 Position Barrel and 30° Lockring**
- 3. RIGHT-ANGLE CORD PLUG with 8 Position Barrel (05DL5M shown)**

[click here to download a schematic drawing](#)

(you will need to have Adobe Acrobat installed on your system to do this)



**STRAIGHT CORD PLUG with Extended Barrel**

**Type 12BL6M - typical** Male plug with ground key-rib. Nickel-plated diecast handle. Contact friction coupling. Flexible black strain relief. Heavy duty cable clamp.

### ORDERING INFORMATION

Part Number	Description	Pin Arrangement
⌘03BL2M	2 pins with insulated switch actuator	1
05BL3M	3 pins at 180°	2
05BL5M	5 pins at 180°	5
09BL4M	4 pins at 210°	3
12BL5M	5 pins at 240°	4
12BL6M	6 pins at 240°	6
⌘15BL7M	7 pins at 270°	7
⌘15BL8M	8 pins at 270°	8

### RIGHT-ANGLE CORD PLUG with 8 Position Barrel and 30° Lockring

**Type 05YL5M - typical** Right-angle chassis hugging, male plug with flexible strain relief. Unique 8-position barrel gives you a choice of any one of eight different cable entry angles. ground key rib 30; turn lockring securely fastens two halves of connector.

### ORDERING INFORMATION


Part Number	Description	Pin Arrangement
⌘05YL3M	3 pins at 180°	2
⌘05YL5M	5 pins at 180°	5
⌘09YL4M	4 pins at 210°	3
⌘12YL5M	5 pins at 240°	4

### RIGHT-ANGLE CORD PLUG with 8 Position Barrel


**Type 05DL5M - typical** Right-angle chassis hugging, male plug with flexible black rubber strain relief. Unique 8-position barrel offers a choice of eight different cable entry

## DIN PLUGS AND RECEPTACLES

### STRAIGHT CORD PLUG with Extended Barrel

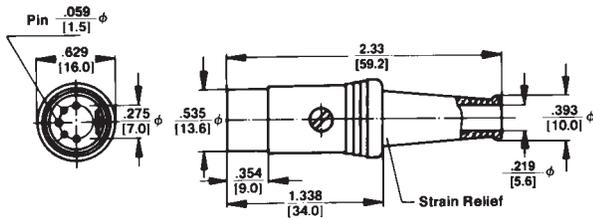


### RIGHT-ANGLE CORD PLUG with 8 Position Barrel and 30° Locking

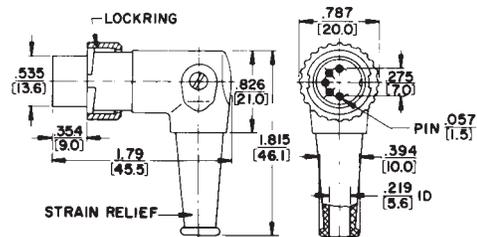

### RIGHT-ANGLE CORD PLUG with 8 Position Barrel



05DL5M shown

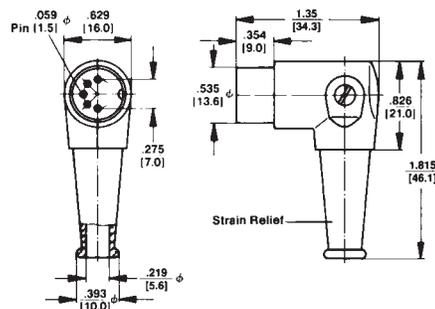

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{Inch}}{\text{(mm)}}$

NOTE: Contact your Switchcraft Representative for price and delivery.