


GSD

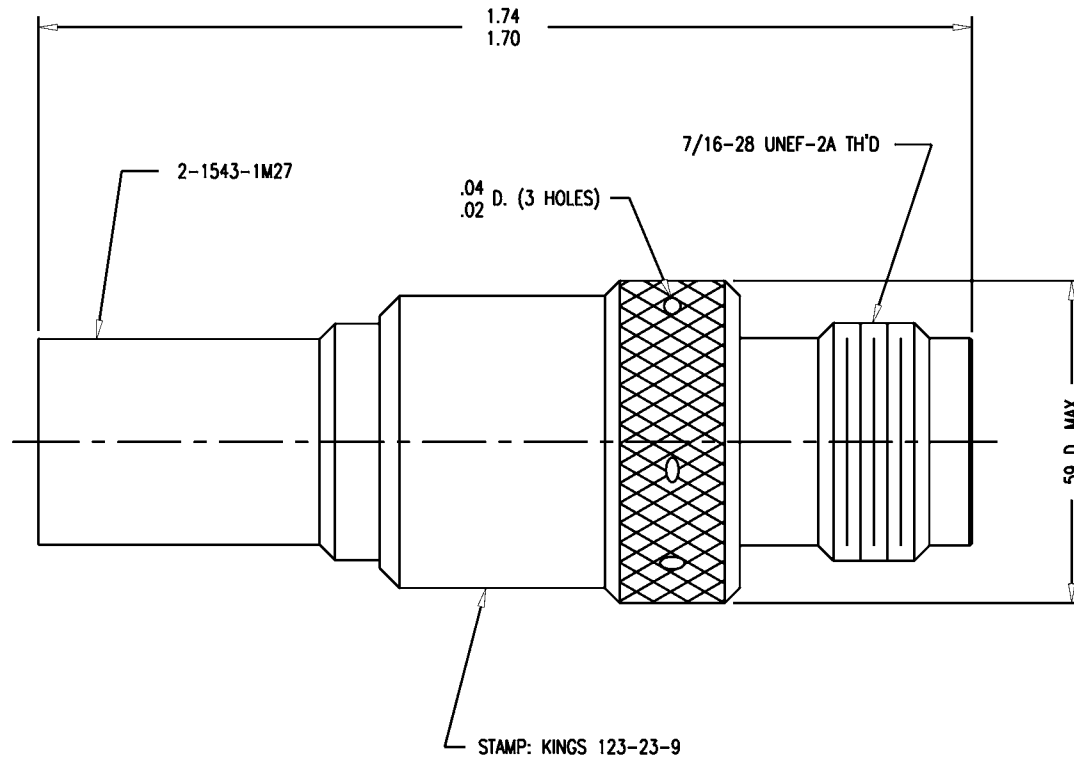

NOTES:

1. FOR USE WITH BOEING S280W503-4 & ADAMS RUSSELL FC28Z CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-546-2.
3. FOR CRIMPING USE DIE KTH-2212.
4. CENTER CONTACT (1-2288-4MA9) SUPPLIED UNASSEMBLED.
5. INTERFACE PER MIL-STD-348, FIG. 313-2.
6. MARK PACKAGE: KINGS 121-23-9
XXXX (DATE CODE)

7. MATERIALS:

CENTER CONTACT-BER. COP., ASTM-B-196
K-GRIP SLEEVE-COMMERCIAL BRONZE, ASTM-B-135
INSULATOR-TEFLON, ASTM-D-4894
ALL OTHER METAL PARTS-BRASS, ASTM-B16

8. FINISHES:

CENTER CONTACT-GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT FINISH (TR-5)

9. ELECTRICAL CHARACTERISTICS:

NOMINAL IMPEDANCE-50 OHMS
FREQUENCY RANGE-DC TO 11 GHZ
WORKING VOLTAGE-500 VRMS

GSD

123-23-9

REVISIONS

ISSUE	CHANGES	
	DATE	BY
1	04/26/94	KH
2	09/26/94	KH

KAM3581

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF: BOEING

JACK, PANEL, TNC

DRAWN	KH	DATE	03/15/94
DESIGN	JT	DATE	03/16/94
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

123-23-9