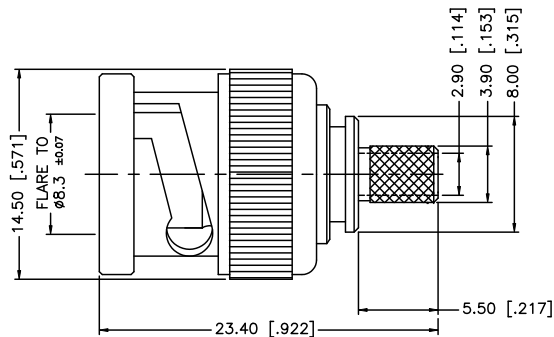
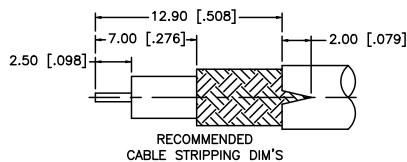


NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .178" [4.52]
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" [1.73]

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex								
8						DRAWN	GRS	09/29/08										
7						CHECKED												
6						ISSUED												
5	FERRULE	COPPER	NICKEL	1						PART DESCRIPTION								
4	SLEEVE	DELIRIN	NATURAL	1						BNC CRIMP PLUG – 75 ohms (FOR 100mHz RGB CABLE)								
3	CONTACT PIN	BRASS	GOLD	1														
2	INSULATOR	PTFE	NATURAL	1						PART NO.								
1	BODY	BRASS	NICKEL	1						112491–10								
	DESCRIPTION	MATERIAL	FINISH	QTY				CAD FILE	C:/112/112491–10.DWG		DWG. NO.	112491–10.DWG		REV.	F	SIZE	A	SCALE