

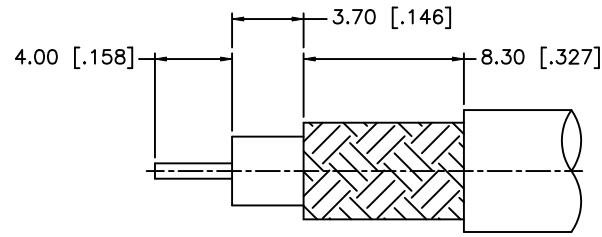
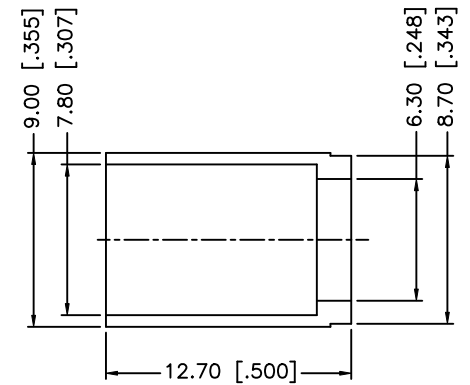


REV.	DATE	ECR NO.	DESCRIPTION
A	04/28/97	—	CHANGE GOLD PLATING SPEC.
B	09/30/08	—	UPDATE DRAWING FORMAT.

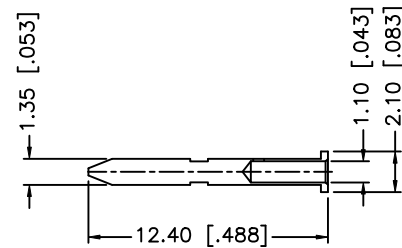

RECOMMENDED
CABLE STRIPPING DIM'S

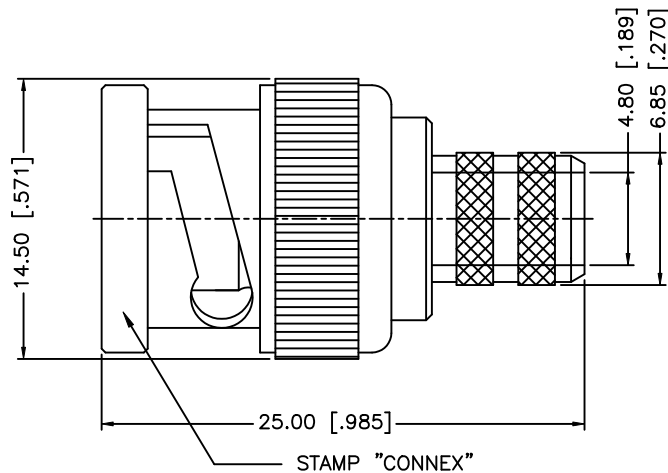

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. NICKEL PL. 100 MIN. OVER COPPER PL. 50 MIN.
2. GOLD PL. 15 MIN. OVER NICKEL PL. 50 MIN. OVER COPPER PL. 50 MIN.
3. TEFLON MIL-P-19468.

						UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex									
8						UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm		DRAWN	GRS	09/30/08											
7								CHECKED													
6								ISSUED													
5								SHEET	1 OF 1				PART DESCRIPTION								
4		FERRULE	BRASS	NICKEL	1							BNC CRIMP PLUG									
3		CONTACT PIN	BRASS	GOLD	1							(RG–6 PLENUM/ BELDEN 1695A – 75 ohms)									
2		INSULATOR	PTFE	NATURAL	1							PART NO.									
1		BODY	BRASS	NICKEL	1							112958									
		DESCRIPTION	MATERIAL	FINISH	QTY	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"		CAD FILE		C:/112/112958.DWG		DWG. NO.		112958.DWG		REV.	B	SIZE	A	SCALE	NA
						DO NOT SCALE DRAWING															

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[112958](#)