



- For infra-red reflow and vapor phase soldering.
- Gull wing terminals for max. strength and easy in-circuit test.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 218 for details.
- Series 110 use MM #1005 pins. See page 137 for details.
- Insulators are high temperature thermoplastic.




Ordering Information

Total number of pins	Pin Spacing			Quantity per tube
	A	B	C	
10	0.5	0.2	0.3	40
4	0.2	0.3	0.4	102
6	0.3	0.3	0.4	67
8	0.4	0.3	0.4	50
10	0.5	0.3	0.4	40
14	0.7	0.3	0.4	28
16	0.8	0.3	0.4	25
18	0.9	0.3	0.4	22
20	1.0	0.3	0.4	20
22	1.1	0.3	0.4	18
24	1.2	0.3	0.4	16
28	1.4	0.3	0.4	14
20	1.0	0.4	0.5	20
22	1.1	0.4	0.5	18
24	1.2	0.4	0.5	16
28	1.4	0.4	0.5	14
32	1.6	0.4	0.5	12
24	1.2	0.6	0.7	32
28	1.4	0.6	0.7	28
32	1.6	0.6	0.7	24
36	1.8	0.6	0.7	22
40	2.0	0.6	0.7	20
42	2.1	0.6	0.7	18
48	2.4	0.6	0.7	16
50	2.5	0.6	0.7	16
52	2.6	0.6	0.7	14
50	2.5	0.9	1.0	16
52	2.6	0.9	1.0	14
64	3.2	0.9	1.0	12

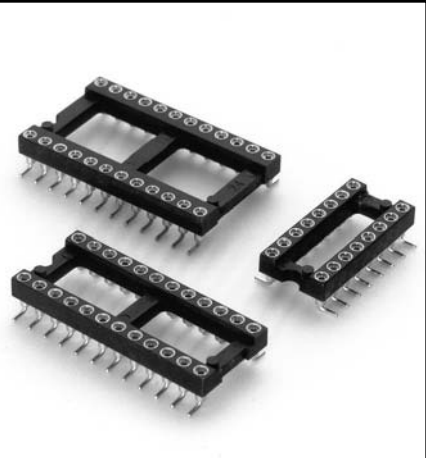

For RoHS compliance select ◇ plating code.

<p>110-XX-210-41-105000</p> <p>110-XX-304-41-105000</p> <p>110-XX-306-41-105000</p> <p>110-XX-308-41-105000</p> <p>110-XX-310-41-105000</p> <p>110-XX-314-41-105000</p> <p>110-XX-316-41-105000</p> <p>110-XX-318-41-105000</p> <p>110-XX-320-41-105000</p> <p>110-XX-322-41-105000</p> <p>110-XX-324-41-105000</p> <p>110-XX-328-41-105000</p> <p>110-XX-420-41-105000</p> <p>110-XX-422-41-105000</p> <p>110-XX-424-41-105000</p> <p>110-XX-428-41-105000</p> <p>110-XX-432-41-105000</p> <p>110-XX-624-41-105000</p> <p>110-XX-628-41-105000</p> <p>110-XX-632-41-105000</p> <p>110-XX-636-41-105000</p> <p>110-XX-640-41-105000</p> <p>110-XX-642-41-105000</p> <p>110-XX-648-41-105000</p> <p>110-XX-650-41-105000</p> <p>110-XX-652-41-105000</p> <p>110-XX-950-41-105000</p> <p>110-XX-952-41-105000</p> <p>110-XX-964-41-105000</p>	<div style="text-align: center;">  <p><i>XX=Plating Code See Below</i></p> </div>
---	--

SPECIFY PLATING CODE XX=		93			43◇	
Sleeve (Pin)		200μ" Sn/Pb			200μ" Sn	
Contact (Clip)		30μ" Au			30μ" Au	