



REV.	DATE	DESCRIPTION
NC	07/30/00	INITIAL RELEASE

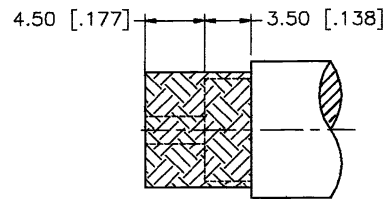

RECOMMENDED
CABLE STRIPPING DIM'S

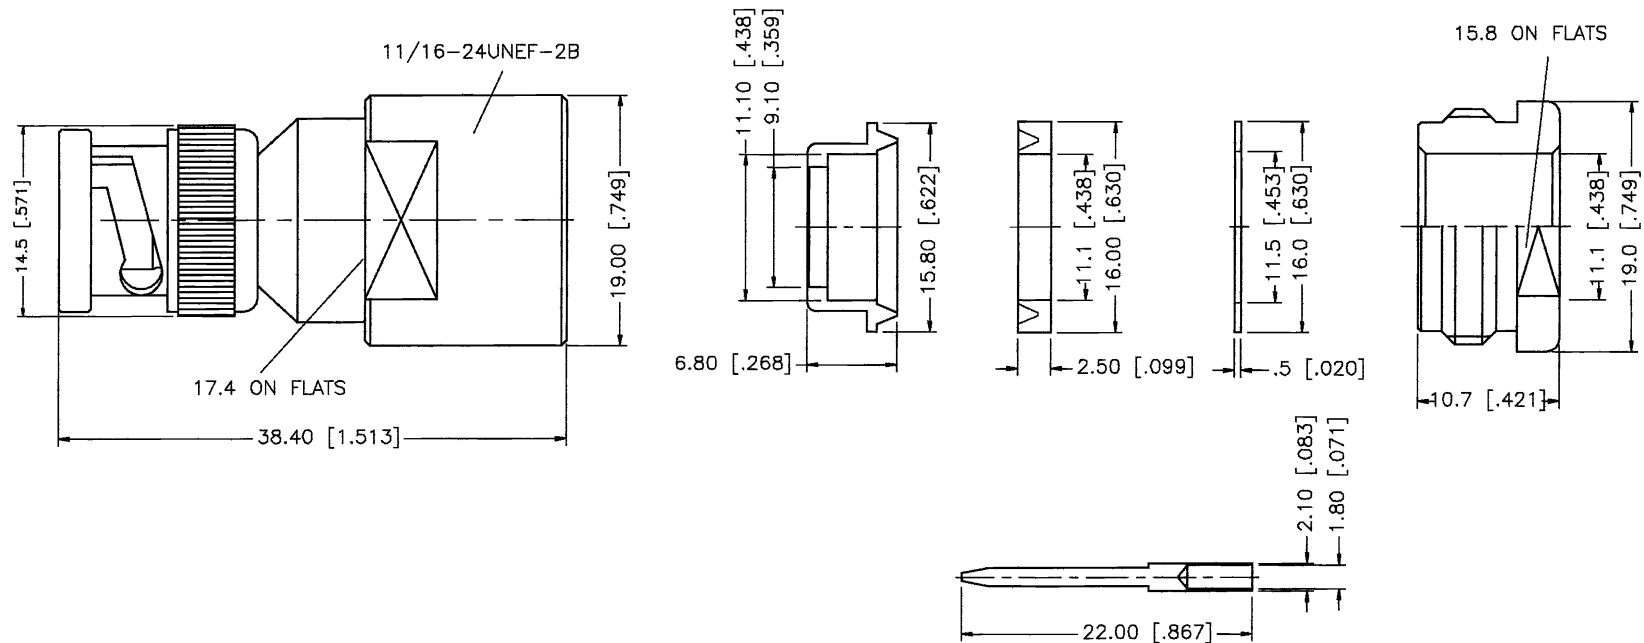

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE				
1 BODY	BRASS	NICKEL	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	DRAWN G.R.S.	07/30/00				
2 INSULATOR	TEFLON	NATURAL		CHECKED					
3 BRAID CLAMP	BRASS	NICKEL		ISSUED					
4 GASKET	SILICONE	RED							
5 WASHER	BRASS	NICKEL							
6 NUT	BRASS	NICKEL							
7									
8			DO NOT SCALE DRAWING						
						TITLE BNC CLAMP JACK (FOR RG11/U, 14 AWG B 8213, B929L CABLE)			
						SIZE A	FSCM NO. 99001	DWG. NO. 112657.DWG	REV. NC
						SCALE NA	PART NO. 112657	SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[112657](#)