

## Base strip - SMSTBA 2,5/20-G - 1769984

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Header, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 20, Pitch: 5 mm, Color: green, Contact surface: Tin, Mounting: Soldering



The figure shows a 10-position version of the product



### Key commercial data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 50 pc                                                                                                   |
| GTIN                                 | <br>4 017918 035204 |
| Weight per Piece (excluding packing) | 11.3 g                                                                                                  |
| Custom tariff number                 | 85366990                                                                                                |
| Country of origin                    | Germany                                                                                                 |
| Note                                 | Made to Order (non-returnable)                                                                          |

### Technical data

#### Dimensions

|                |          |
|----------------|----------|
| Length         | 16.5 mm  |
| Pitch          | 5 mm     |
| Dimension a    | 95 mm    |
| Pin dimensions | 1 x 1 mm |
| Hole diameter  | 1.4 mm   |

#### General

|                             |                  |
|-----------------------------|------------------|
| Range of articles           | SMSTBA 2,5/...-G |
| Insulating material group   | I                |
| Rated surge voltage (III/3) | 4 kV             |
| Rated surge voltage (III/2) | 4 kV             |
| Rated surge voltage (II/2)  | 4 kV             |
| Rated voltage (III/3)       | 250 V            |
| Rated voltage (III/2)       | 320 V            |
| Rated voltage (II/2)        | 400 V            |

## Base strip - SMSTBA 2,5/20-G - 1769984

### Technical data

#### General

|                                         |        |
|-----------------------------------------|--------|
| Connection in acc. with standard        | EN-VDE |
| Nominal current $I_N$                   | 12 A   |
| Maximum load current                    | 12 A   |
| Insulating material                     | PA     |
| Inflammability class according to UL 94 | V0     |
| Color                                   | green  |
| Number of positions                     | 20     |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440402 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002637 |
| ETIM 5.0 | EC002637 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11     | 39121409 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121409 |

### Approvals

#### Approvals

#### Approvals

CSA / UL Recognized / VDE Gutachten mit Fertigungsüberwachung / cUL Recognized / IECCEB Scheme / CCA / EAC / cULus Recognized

#### Ex Approvals

## Base strip - SMSTBA 2,5/20-G - 1769984

### Approvals

Approvals submitted

#### Approval details

|                                                                                       |       |       |
|---------------------------------------------------------------------------------------|-------|-------|
| CSA  |       |       |
|                                                                                       | B     | D     |
| Nominal current I <sub>N</sub>                                                        | 15 A  | 10 A  |
| Nominal voltage U <sub>N</sub>                                                        | 300 V | 300 V |

|                                                                                                 |       |       |
|-------------------------------------------------------------------------------------------------|-------|-------|
| UL Recognized  |       |       |
|                                                                                                 | B     | D     |
| Nominal current I <sub>N</sub>                                                                  | 15 A  | 10 A  |
| Nominal voltage U <sub>N</sub>                                                                  | 300 V | 300 V |

|                                                                                                                             |       |
|-----------------------------------------------------------------------------------------------------------------------------|-------|
| VDE Gutachten mit Fertigungsüberwachung  |       |
| Nominal current I <sub>N</sub>                                                                                              | 12 A  |
| Nominal voltage U <sub>N</sub>                                                                                              | 250 V |

|                                                                                                    |       |       |
|----------------------------------------------------------------------------------------------------|-------|-------|
| cUL Recognized  |       |       |
|                                                                                                    | B     | D     |
| Nominal current I <sub>N</sub>                                                                     | 15 A  | 10 A  |
| Nominal voltage U <sub>N</sub>                                                                     | 300 V | 300 V |

|                                                                                                     |       |
|-----------------------------------------------------------------------------------------------------|-------|
| IECEE CB Scheme  |       |
| Nominal current I <sub>N</sub>                                                                      | 12 A  |
| Nominal voltage U <sub>N</sub>                                                                      | 250 V |

## Base strip - SMSTBA 2,5/20-G - 1769984

### Approvals

|                                |       |
|--------------------------------|-------|
| CCA                            |       |
|                                |       |
| Nominal current I <sub>N</sub> | 12 A  |
| Nominal voltage U <sub>N</sub> | 250 V |

|     |
|-----|
| EAC |
|-----|

|                                                                                                    |
|----------------------------------------------------------------------------------------------------|
| cULus Recognized  |
|----------------------------------------------------------------------------------------------------|

### Accessories

#### Accessories

#### Coding element

Coding star - CR-MSTB - 1734401



Coding section, inserted into the recess in the header or the inverted plug, red insulating material

#### Filler plug

Accessories - MSTB-BL - 1755477



Keying cap, for forming sections, plugs onto header pin, green insulating material

#### Labeled terminal marker

Marker card - SK 5/3,8:FORTL.ZAHLEN - 0804183



Marker card, Card, white, labeled, Horizontal: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - (99)100, Mounting type: Adhesive, for terminal block width: 5 mm, Lettering field: 5 x 3.8 mm

### Additional products

## Base strip - SMSTBA 2,5/20-G - 1769984

### Accessories

#### Printed-circuit board connector - MSTB 2,5/20-ST - 1754805



Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 20, Pitch: 5 mm, Connection method: Screw connection, Color: green, Contact surface: Tin

---

#### Printed-circuit board connector - FKCT 2,5/20-ST - 1909391



Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 20, Pitch: 5 mm, Connection method: Spring-cage connection, Color: green, Contact surface: Tin

---

#### Printed-circuit board connector - MVSTBR 2,5/20-ST - 1792197



Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 20, Pitch: 5 mm, Connection method: Screw connection, Color: green, Contact surface: Tin

---

#### Printed-circuit board connector - FRONT-MSTB 2,5/20-ST - 1779592



Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 20, Pitch: 5 mm, Connection method: Screw connection, Color: green, Contact surface: Tin

---

#### Printed-circuit board connector - SMSTB 2,5/20-ST - 1768930



Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 20, Pitch: 5 mm, Connection method: Screw connection, Color: green, Contact surface: Tin

## Base strip - SMSTBA 2,5/20-G - 1769984

### Accessories

Printed-circuit board connector - MSTBP 2,5/20-ST - 1765959



Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 20, Pitch: 5 mm, Connection method: Screw connection, Color: green, Contact surface: Tin


Printed-circuit board connector - MVSTBW 2,5/20-ST - 1792702




Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 20, Pitch: 5 mm, Connection method: Screw connection, Color: green, Contact surface: Tin

### Drawings

Drilling diagram



Diagram

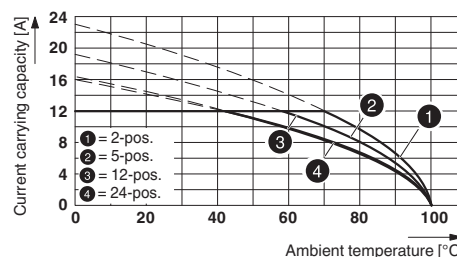

Type: SMSTB 2,5/...-ST(-5,08) with SMSTBA 2,5/...-G(-5,08)

Dimensioned drawing

