



REV.	DATE	DESCRIPTION
NC	02/21/03	INITIAL RELEASE

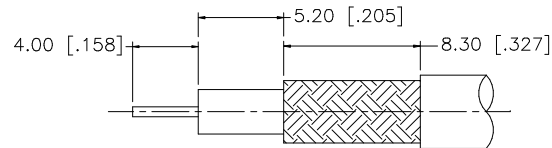

RECOMMENDED CABLE STRIPPING DIMENSIONS

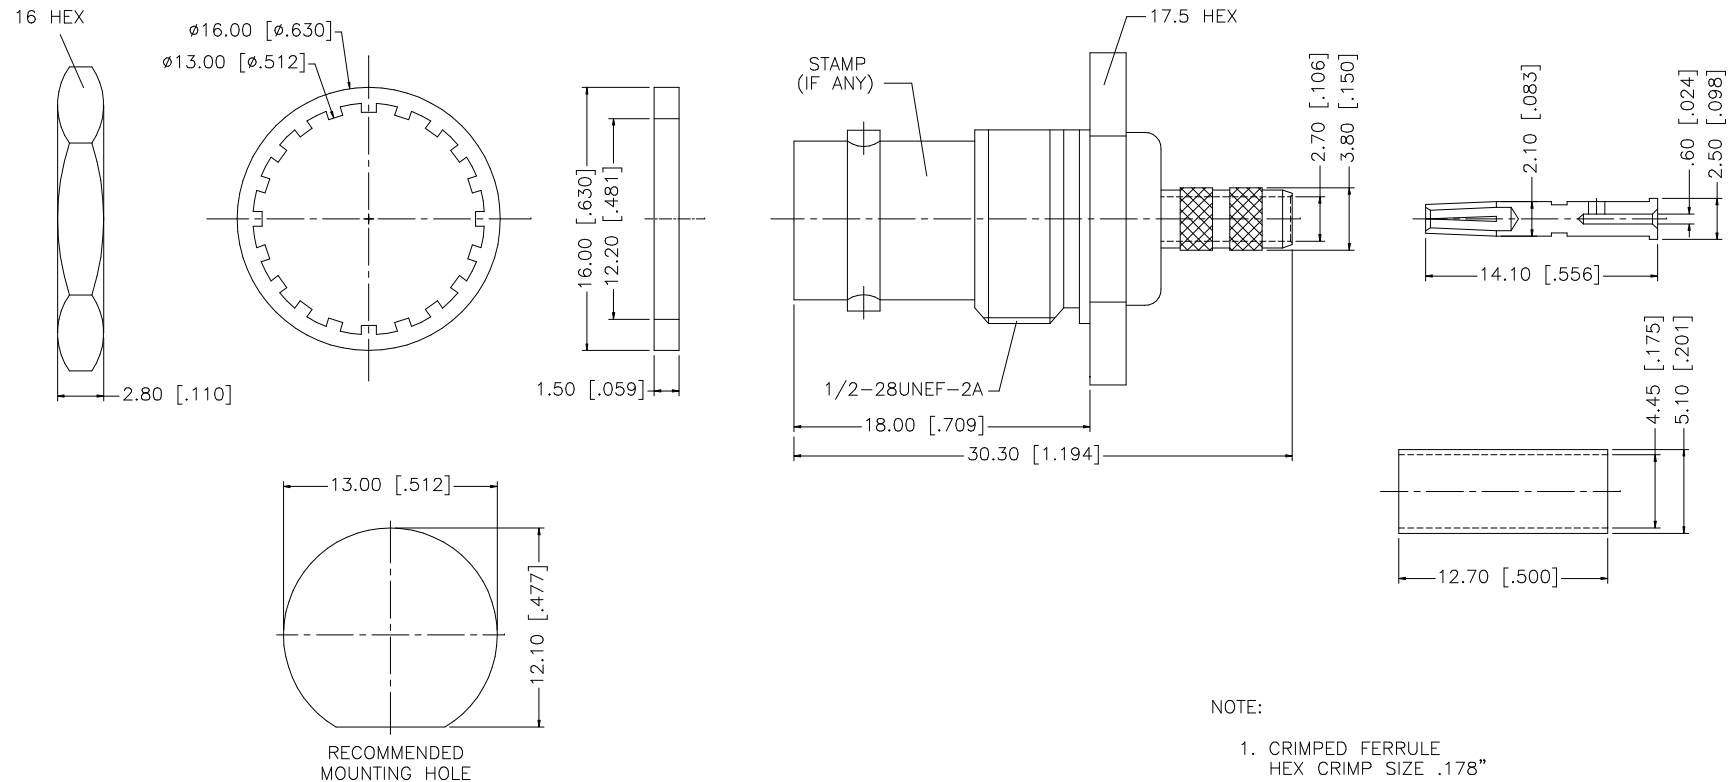

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex								
8						DRAWN	G.R.S.					02/24/03	PART DESCRIPTION BNC BULKHEAD CRIMP JACK (FOR BELDEN 8218 CABLE)			
7	FERRULE	COPPER	NICKEL	1		CHECKED										
6	HEX NUT	BRASS	NICKEL	1		ISSUED			PART NO. 112568							
5	LOCK WASHER	BRASS	NICKEL	1		SHEET	1 OF 1									
4	GASKET	RUBBER	RED	1					DWG. NO. 112568.DWG							
3	CONTACT PIN	PHOS. BRONZE	GOLD	1												
2	INSULATOR	TEFLON	NATURAL	1												
1	BODY/HOUSING	BRASS	NICKEL	1												
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE C:/112/112568.DWG		DWG. NO. 112568.DWG		REV. NC	SIZE A	SCALE NA				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[112568](#)