


## 1046232-1 Product Details

### Have a Question?

Chat with a Product Information Specialist

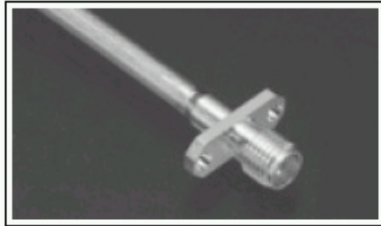

**1046232-1**

TE Internal Number: 1046232-1

**Active**

### SMA/QMA RF Connectors

[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

#### Product Highlights:

- Connector - RF
- RF Connector Type = SMA
- Jack
- Applies To Coaxial Cable
- Without Snap-Lock

[View all Features](#)

### Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#)
[Request Sample](#)
[Find Similar Products](#)
[Buy Product](#)

### Documentation & Additional Information

#### Product Drawings:

- None Available

#### Catalog Pages/Data Sheets:

- None Available

#### Product Specifications:

- None Available

#### Application Specifications:

- None Available

#### Instruction Sheets:

- None Available

#### CAD Files:

- None Available

#### Additional Information:

- [Product Line Information](#)

#### Related Products:

- [Tooling](#)

### Product Features (Please use the Product Drawing for all design activity)

#### Product Type Features:

- [Product Type](#) = Connector - RF
- RF Connector Type = SMA
- [Gender](#) = Jack
- [Body Style](#) = Straight
- [Number of Panel Mount Holes](#) = 2
- [Body Material](#) = Stainless Steel
- [Body Finish](#) = Passivated
- [Center Contact](#) = With
- [Retractable Collar](#) = Without
- [Safety Wire Holes](#) = Without
- Dielectric Material = TFE Fluorocarbon

#### Mechanical Attachment:

- [Panel Attachment](#) = With
- [Panel Attachment Method](#) = Flange
- [Panel Attachment Style](#) = Rear Mount

#### Electrical Characteristics:

- Impedance ( $\Omega$ ) = 50
- Frequency = DC - 18 GHz
- Insulation Resistance (M $\Omega$ ) = 10,000

#### Termination Related Features:

- [Coaxial Cable Termination Type](#) = Solder

#### Body Related Features:

- Snap-Lock = Without
- [Length \(mm \[in\]\)](#) = 9.53 [0.375]

#### Contact Related Features:

- Contact Type = Solder Cup
- Center Contact Material = Beryllium Copper
- Center Contact Plating = Gold

#### Industry Standards:

- Government/Industry Qualification = No
- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C, Reflow solder capable to 245°C, Reflow solder capable to 260°C, Pin-in-Paste capable to 245°C, Pin-in-Paste capable to 260°C
- RoHS/ELV Compliance History = Always was RoHS compliant

#### Conditions for Usage:

- [Applies To](#) = Coaxial Cable

#### Other:

- Brand = AMP

BOOKMARK

### Corporate Information

[Who We Are](#)  
[Investors](#)  
[News Room](#)  
[Supplier Portal](#)  
[Careers](#)

### Quick Links

[Check Distributor Inventory](#)  
[Cross Reference](#)  
[Find Documents & Drawings](#)  
[Product Compliance Support Center](#)  
[Site Map](#)

### Customer Support

[Email or Chat with Us](#)  
[Find a Phone Number](#)  
[Search Knowledge Base](#)  
[Manage Your Account](#)

### Sign up for our eNewsletter

Enter your email address

Follow us on: