


## Printed-circuit board connector - MSTBA 2,5/ 9-G AU - 1748280

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Header, Nominal current: 12 A, Number of positions: 9, Pitch: 5 mm, Color: green, Contact surface: Gold



The figure shows a 10-position version of the product



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	4.16 g
Custom tariff number	85366990
Country of origin	Germany

### Technical data

#### Dimensions

Pitch	5.00 mm
Dimension a	40 mm
Constructional height	9 mm
Length of the solder pin	3.5 mm

#### General

Range of articles	MSTBA 2,5/...-G
Rated voltage (III/3)	250 V
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	12 A
Color	green
Number of positions	9

### Standards and Regulations

# Printed-circuit board connector - MSTBA 2,5/ 9-G AU - 1748280

## Technical data

### Standards and Regulations

Connection in acc. with standard	EN-VDE
----------------------------------	--------

## Classifications

### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402


### ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002637


### UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

## Drawings

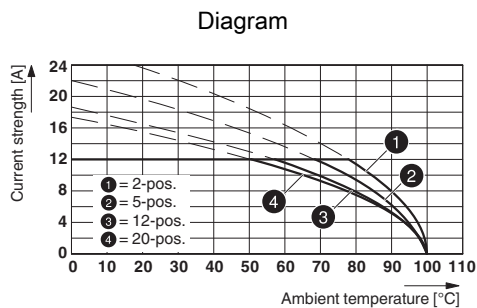

Type: MSTB 2,5/...-ST AU with MSTBA 2,5/...-G AU

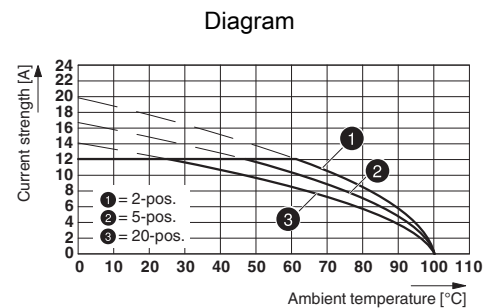

Type: MVSTBW 2,5/...-ST AU with MSTBA 2,5/...-G AU

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1748280](#)